




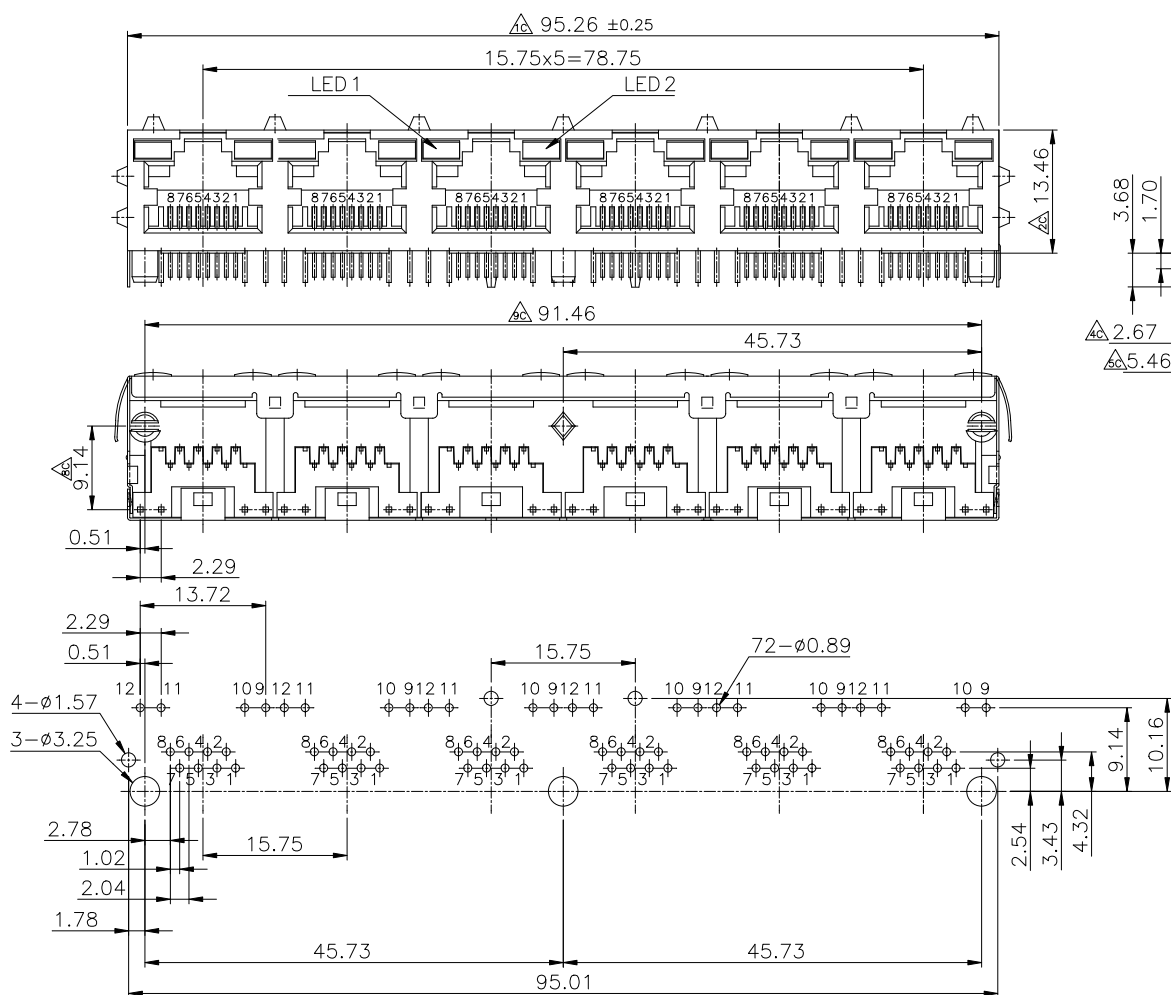

MATERIALS:
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT,
 TIN PLATING OVER NICKEL IN SOLDER AREA.
 SHIELD: BRASS PLATING NICKEL ALLOY.

TYPICAL FOR SINGLE
 COLOR LED
 (RED, GREEN, YELLOW)



Ordering Information

AJT42L	8	8	6	X-0	X	4
Type	Positions	Contacts	Ports	Plating 1=6u" 3=30u"	Top & Side Tabs	

LED1	LED2	LED1	LED2
1= Yellow	Green	5= Green	Red
2= Green	Green	6= Red	Green
3= Green	Yellow	7= Yellow	Yellow
4= Green	Orange	8= Grn/Ylw	Grn/Ylw

Tolerance
 unless otherwise specified
 mm
 X ± .50
 .X ± .38
 .XX ± .25
 .XXX ± .10
 angles ± 3°



P/N: AJT42L886X-0X4

Desc.: Side entry, shielded, LED, thru hole modular jack

Date: 9-8-10

Dimensions in mm