
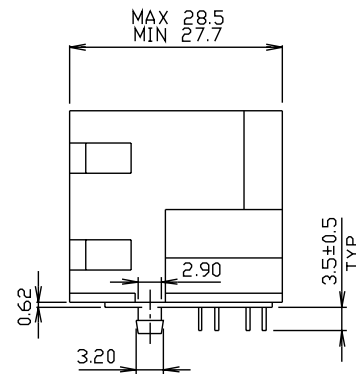
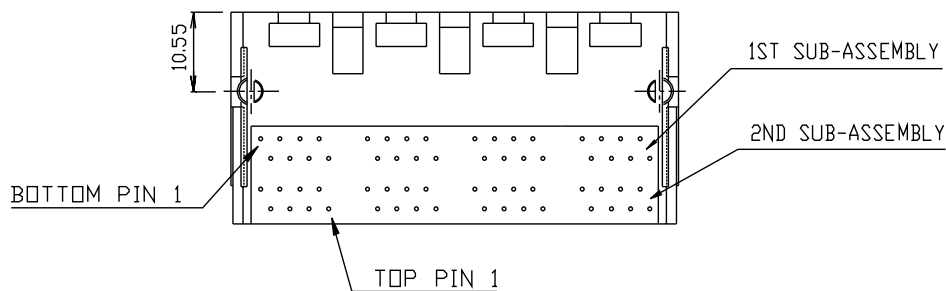
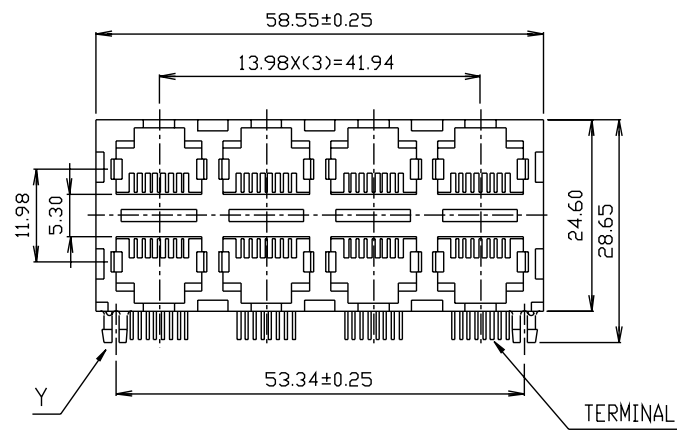


DETAIL Y

MATERIAL:
 •HOUSING-PBT POLYESTER UL-94V-0
 MIXED GLASS FIBER.
 STANDARD COLOR-BLACK
 •CONTACTS-0.35mm THICK PHOS-BRONZE
 PLATED WITH HARD GOLD AND
 GOLD FLASH IN SOLDER AREA.
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

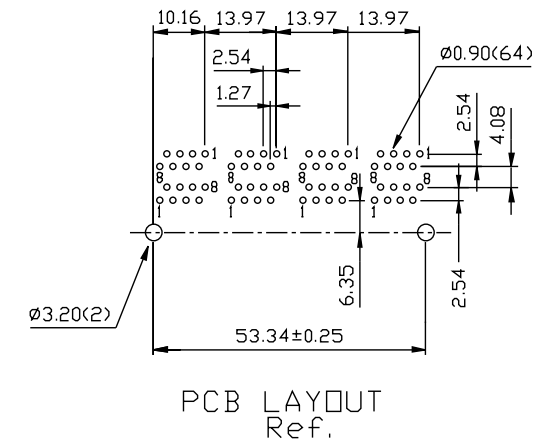

Ordering Information

AJT42C	8	8	8	X
Type	Positions	Contacts	Ports	Plating 1 = 6u" 3 = 30u"

Tolerance
 unless otherwise specified
 .0 ± .25
 .00 ± .13
 .000 ± .05

METZ CONNECT	P/N: AJT42C888X
Desc.: Side entry, unshielded, 2 X 4, right angle, thru hole modular jack	
Date: 9-09-09	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian