
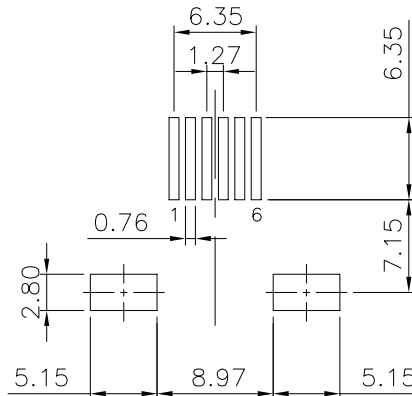


**MATERIAL:**

- HOUSING—DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE  
PLATED WITH HARD GOLD AND  
GOLD FLASH IN SOLDER AREA.
- HOLD DOWN—0.30mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

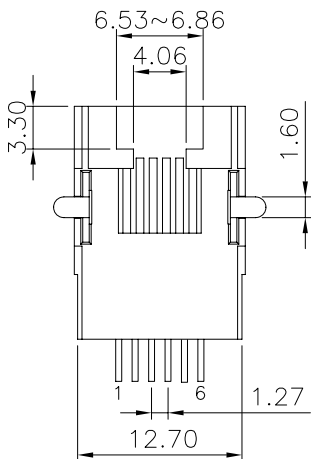

PCB LAYOUT

Ref.

**Ordering Information**

AJS57A	6	6	1	X
Type	Positions	Contacts	Ports	Plating 1 = 6u" 3 = 30u"

<p><b>Tolerance</b> unless otherwise specified mm</p> <p>.0 ± .25 .00 ± .13 .000 ± .05</p>
--

	<p>P/N: AJS57A661X</p>
<p>Desc.: Side entry, unshielded, SMT modular jack</p>	
<p>Date: 2-4-10</p>	<p>Drawn By: Donna Mears</p>
<p>Dimensions in mm</p>	<p>Verified By: Mike Balekdjian</p>