

Data sheet

RT027xxHBLC Type 175

Page 1/5

P/N

311751xx

xx=number of poles


2023/06/26

Version: AE


Illustrations



Dimensional drawing

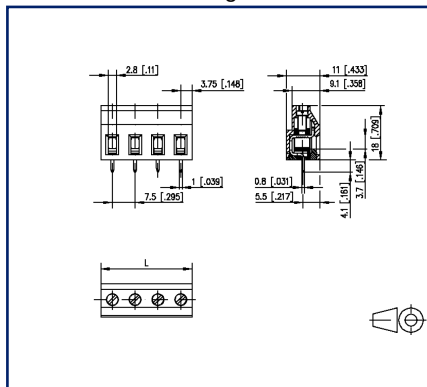

Drill pattern

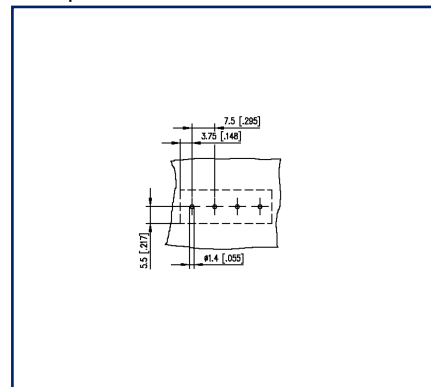

See enlarged drawings at the end of document

Product specification

- screw type terminal block, solderable
- centerline 7.50 mm, direction of connection 90°
- lift system, fittable without loss of poles
- color black



Data sheet

RT027xxHBLC Type 175

Page 2/5

P/N
311751xx

xx=number of poles

2023/06/26

Version: AE

Technical Data

General Data

Tightening torque SEV	0.5 Nm		
Tightening torque UL	4.4 lb-in		
Solder pin length	4.1 mm		
min. number of poles	2		
max. number of poles	12		
Insulating material class	CTI 600		
clearance/creepage dist.	6.5 mm		
Protection category	IP20		
Min. insul. strip length	8 mm		
Rated current	16 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	200 V	500 V	500 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV

Terminal data

rat.wiring solid AWGmax	0.34 mm ² - 4 mm ² / AWG 22 - AWG 12
rat.wiring strand.AWGmax	0.34 mm ² - 4 mm ² / AWG 22 - AWG 12

Approvals

 V / A / AWG	300 / 20 / 22 - 12
---	--------------------

approval UL - File No.	E121004
------------------------	---------

 2.5 mm ²	750 V / 24 A / T60
---	--------------------

Material

insulating material	PA66
flammability class	V0
contact material	CuZnPb
Contact surface	Ni + Sn
terminal body thread	M3
terminal body material	CuZnPb
terminal body surface	Ni
screw thread	M3

U | Contact

Data sheet RT027xxHBLC Type 175

Page 3/5

P/N
311751xx

xx=number of poles

2023/06/26

Version: AE

Technical Data

screw material	8,8
screw surface	Zn Cr(VI)-frei/free
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
Solderability	Acc. to JEDEC JESD22-B102E 245°C/5s

U | Contact

Data sheet

RT027xxHBLC Type 175

Page 4/5

P/N

311751xx


xx=number of poles

2023/06/26

Version: AE

Illustrations

Dimensional drawing

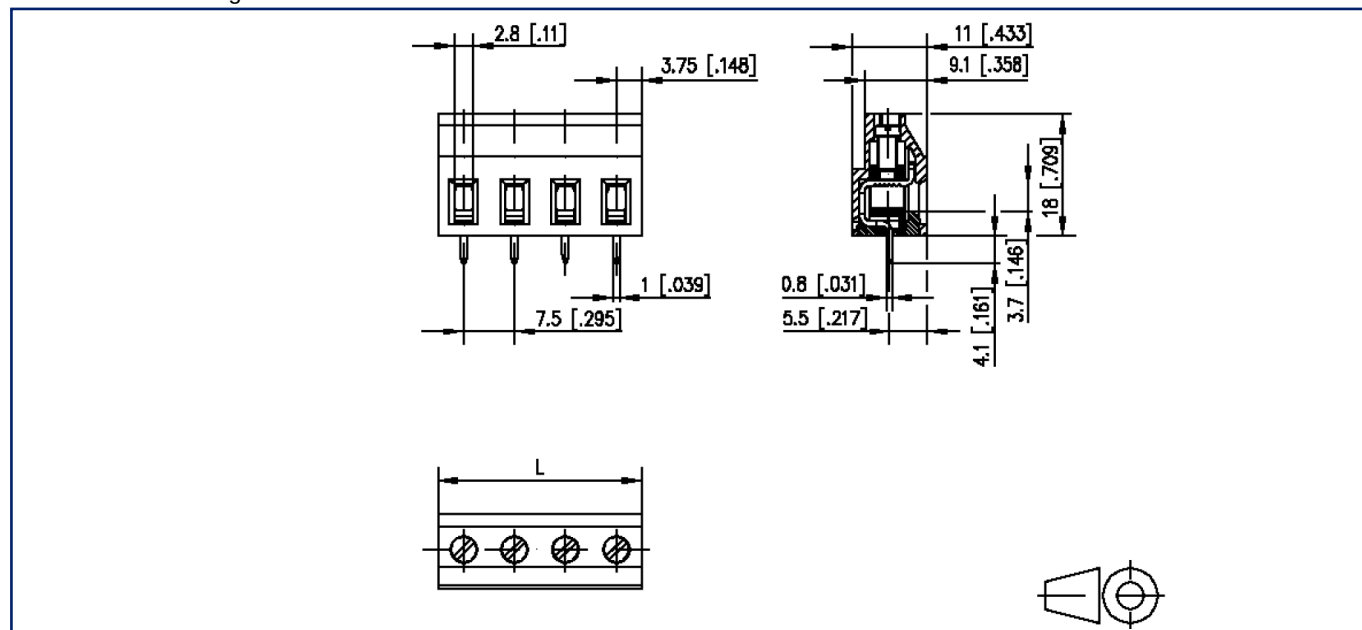

$L = (\text{pole size} - 1) \times \text{centerline} + 7.5 \text{ mm} [0.295]$



U | Contact

Data sheet

RT027xxHBLC Type 175

Page 5/5

P/N

311751xx

xx=number of poles

2023/06/26

Version: AE

Illustrations

Drill pattern

