

Data sheet

RP035xxIBLN Type 013

Page 1/6

P/N
310131xx

xx=number of poles


2023/06/23

Version: T

Illustrations



Dimensional drawing

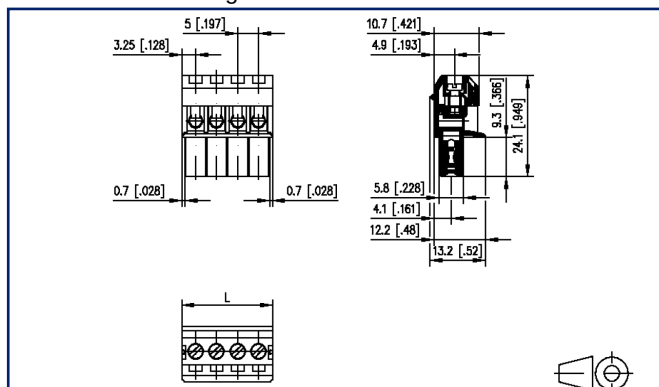

See enlarged drawings at the end of document

Product specification

- screw type terminal block, pluggable
- centerline 5.00 mm, direction of connection 90°
- lift system
- color black
- wire entry uncodeable side perpendicular to plug direction, lamella



Technical Data

General Data

Tightening torque SEV	0.5 Nm		
Tightening torque UL	4.4 lb-in		
min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	3.4 mm		
Protection category	IP20		
Min. insul. strip length	7 mm		
Rated current	10 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160 V	400 V	400 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV

Terminal data

rat.wiring solid AWGmax	0.33 mm ² - 2.5 mm ² / AWG 22 - AWG 12
rat.wiring strand.AWGmax	0.33 mm ² - 2.5 mm ² / AWG 22 - AWG 12

Approvals

 V / A / AWG	300 / 15 / 22 - 12
approval UL - File No.	E121004
2.5 mm ²	300 V / 15 A / 22 - 12

Material

insulating material	PA66
flammability class	V0
contact material	CuBe
Contact surface	Ni + Ag
terminal body thread	M3
terminal body material	CuZnPb
terminal body surface	Ni
screw thread	M3
screw material	8,8
screw surface	Zn Cr(VI)-frei/free

U | Contact

Data sheet

RP035xxIBLN Type 013

Page 3/6

P/N

310131xx

xx=number of poles

2023/06/23

Version: T

Technical Data

wire protector material	CuNiZn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
-----------	--------------

U | Contact

Data sheet

RP035xxIBLN Type 013

Page 4/6

P/N

310131xx

xx=number of poles

2023/06/23

Version: T

Accessories

P/N	Designation
360176	360176

U | Contact

Data sheet

RP035xxIBLN Type 013

Page 5/6

P/N

310131xx

xx=number of poles

2023/06/23

Version: T

Counterpart

P/N	Designation
310191	PT045xxVBEC Type 019
310201	PT045xxVBBN Type 020
310291	PT045xxHBEC Type 029
310301	PT045xxHBBN Type 030
310311	PT045xxHBVC Typ 031
310321	PT045xxHBVN Typ 032

U | Contact

Data sheet

RP035xxIBLN Type 013

Page 6/6

P/N

310131xx


xx=number of poles

2023/06/23

Version: T

Illustrations

Dimensional drawing

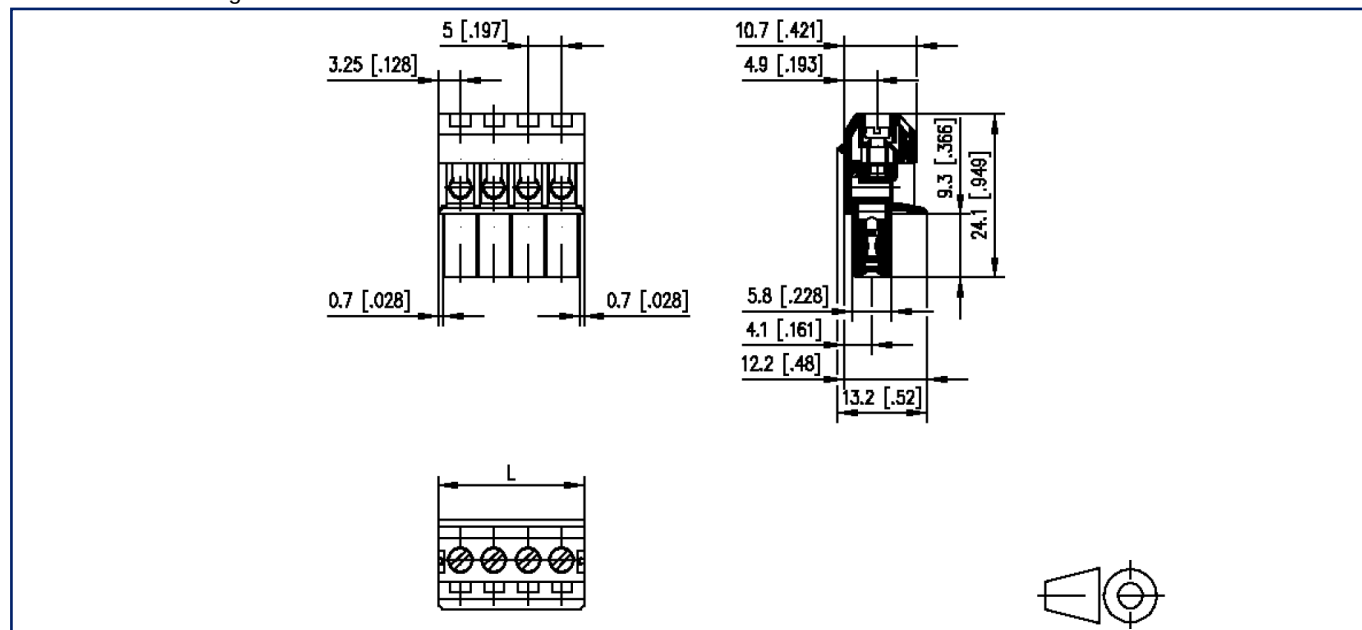

$L = (\text{pole size} - 1) \times \text{centerline} + 6.5 \text{ mm} [0.256]$

