

U | Contact

Data sheet

RP03AxxHBLF Type 217

Page 1/6

P/N
312172xx

xx=number of poles


2023/06/26

Version: X

Illustrations



Dimensional drawing

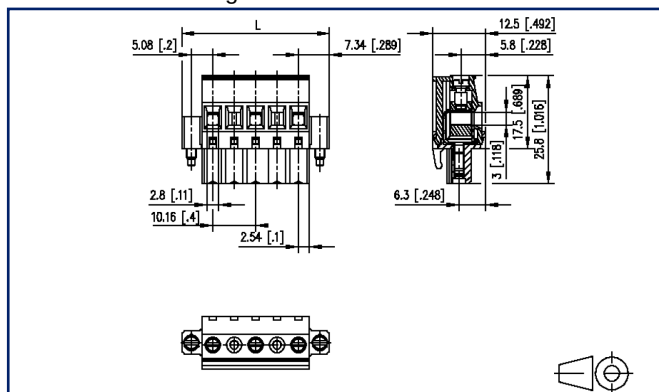

See enlarged drawings at the end of document

Product specification

- screw type terminal block, pluggable
- centerline 10.16 mm, direction of connection 90°
- lift system
- color black, mounting flange



Technical Data

General Data

Tightening torque SEV	0.5 Nm		
Tightening torque UL	4.4 lb-in		
min. number of poles	2		
max. number of poles	6		
Insulating material class	CTI 600		
clearance/creepage dist.	8.28 mm		
Protection category	IP20		
Min. insul. strip length	8 mm		
Rated current	12 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	500 V	1000 V	1000 V
Rated test voltage	6 kV	6 kV	6 kV

Terminal data

rat.wiring solid AWGmax	0.08 mm ² - 4 mm ² / AWG 28 - AWG 12
rat.wiring strand.AWGmax	0.08 mm ² - 2.5 mm ² / AWG 28 - AWG 12

Approvals

extended wiring UL	2 AWG 16-18, or 1 AWG 16 stranded with 1 AWG 18 solid, or 1 AWG 16 stranded with 1 AWG 18 stranded
--------------------	--



V / A / AWG

600 / 16 / 28 - 12

approval UL - File No.

E121004



2.5 mm²

630 V / 4 kV / 13.5 A

Material

insulating material	PA66
flammability class	V0
contact material	CuSn
Contact surface	Sn
terminal body thread	M3
terminal body material	CuZnPb
terminal body surface	Ni



U | Contact

Data sheet

RP03AxxHBLF Type 217

Page 3/6

P/N

312172xx

xx=number of poles

2023/06/26

Version: X

Technical Data

screw thread	M3
screw material	8,8
screw surface	Zn Cr(VI)-frei/free
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
-----------	--------------



U | Contact

Data sheet

RP03AxxHBLF Type 217

Page 4/6

P/N

312172xx

xx=number of poles

2023/06/26

Version: X

Accessories

P/N	Designation
700025-01-9	Coding star white with a group of 6 coding pins

U | Contact

Data sheet

Page 5/6

RP03AxxHBLF Type 217

P/N

312172xx**xx=number of poles**

2023/06/26

Version: X

Counterpart

P/N	Designation
312352	PT11AxxVBBF Type 235
312362	PT11AxxHBBF Type 236

U | Contact

Data sheet

RP03AxxHBLF Type 217

Page 6/6

P/N

312172xx


xx=number of poles

2023/06/26

Version: X

Illustrations

Dimensional drawing

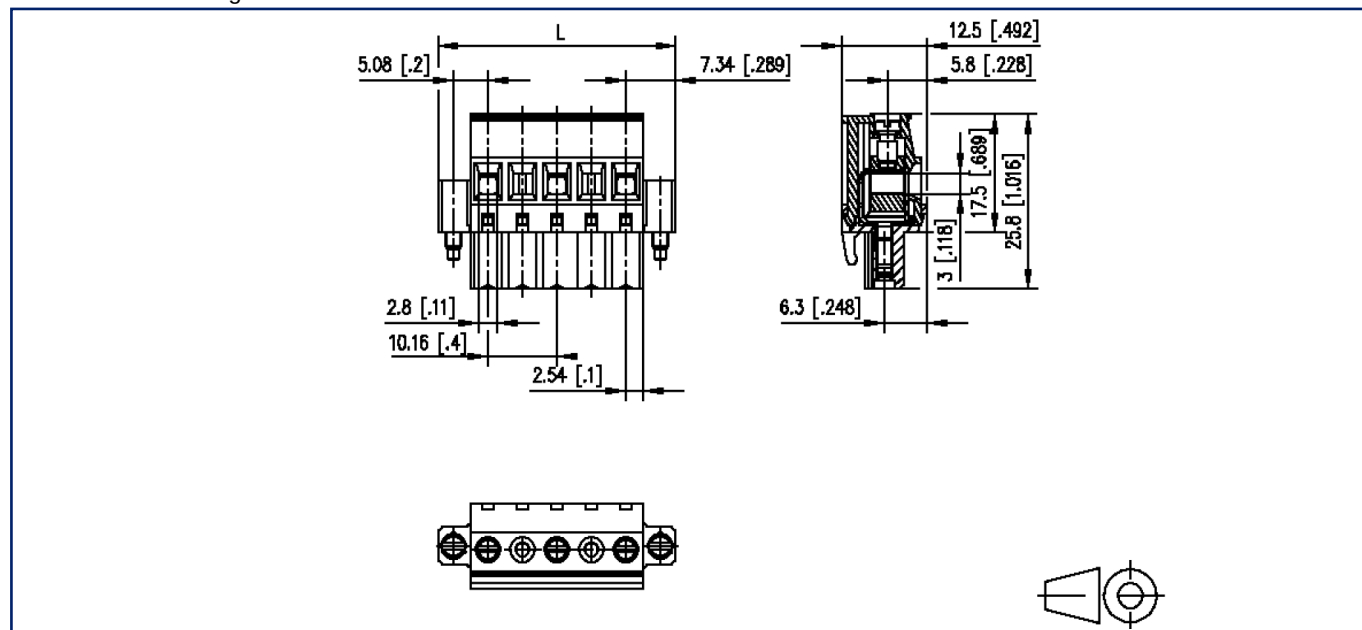

$L = (\text{pole size} - 1) \times \text{centerline} + 14.68 \text{ mm} [0.578]$