

Data sheet

PR075xxHBER Type 338

Page 1/6

P/N

313381xx

xx=number of poles


2023/06/28

Version: AJ


Illustrations



Dimensional drawing

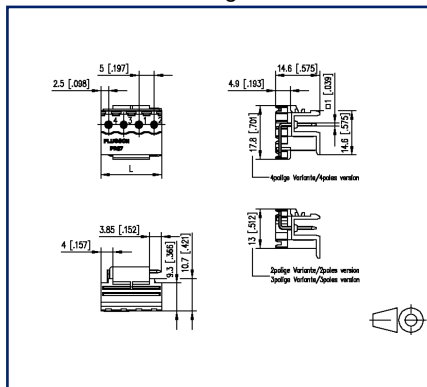

Drill pattern

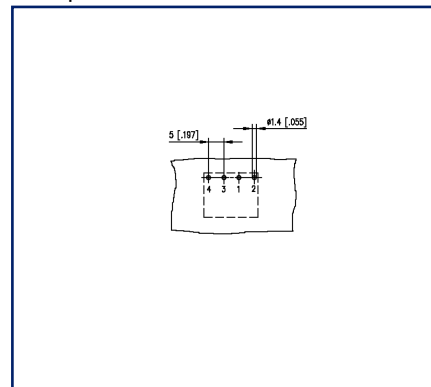

See enlarged drawings at the end of document

Product specification

- pin header, THR solderable
- centerline 5.00 mm, direction of connection 90°
- open ends, fittable without loss of poles
- color black
- Tape & Reel packaging possible
- codeable, connection right side, pluggable for module housing



U | Contact

Data sheet PR075xxHBER Type 338

Page 2/6

P/N
313381xx

xx=number of poles

2023/06/28

Version: AJ

Technical Data

General Data

Solder pin length	3.85 mm		
min. number of poles	2		
max. number of poles	4		
Insulating material class	CTI 600		
clearance/creepage dist.	3.2 mm		
Protection category	IP00		
Rated current	12 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250 V	630 V	630 V
Rated test voltage	4 kV	4 kV	4 kV

Approvals

 V / A	300 / 17
approval UL - File No.	E121004
 1.5 mm ²	250 V / 4 kV / 12 A / 1.0 x 1.0 mm

Material

insulating material	PA66/6T
flammability class	V0
contact pin material	CuZn
contact pin surface	Ni + Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13
Ball pressure test	125 °C acc. to IEC 60695-10-2

Climatic Data

upper limit temperature	125 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -cH
Solderability	reflowable

U | Contact

Data sheet

PR075xxHBER Type 338

Page 3/6

P/N

313381xx**xx=number of poles**

2023/06/28

Version: AJ

Accessories

P/N	Designation
700024-01-5	Kodierstern blau F_Kodier_blp
700024-0179	F_Kodier_blp
700024-0183	F_Kodier_wsc
700024-01-9	Coding star white
700024-02-8	F_Kodier_rtf
700024-0282	F_Kodier_rtf
700523-0157	Geh_Kappe_swg_Block
700523-01C8	Geh_Kappe_grl_Block



U | Contact

Data sheet

PR075xxHBER Type 338

Page 4/6

P/N

313381xx

xx=number of poles

2023/06/28

Version: AJ

Counterpart of

P/N	Designation
313131	RP035xxHBLC Type 313
313141	RP035xxHBLD Type 314
31314103-08	RP035xxHBLD Typ 314
31314103-09	RP035xxHBLD Typ 314
313481	RP085xxVBLC Type 348
313491	RP015xxVBLC Type 349
313501	RP015xxSBLC Type 350
ASP045	SP045xxVBNC ASP045
ASP135	SP135xxVBNC (ASP135)
SP065XXVBNC	SP065xxVBNC
SP065XXVBPC	SP065xxVBPC
SP995XXVBNC	SP995xxVBNC

U | Contact

Data sheet

PR075xxHBER Type 338

Page 5/6

P/N

313381xx


xx=number of poles

2023/06/28

Version: AJ

Illustrations

Dimensional drawing

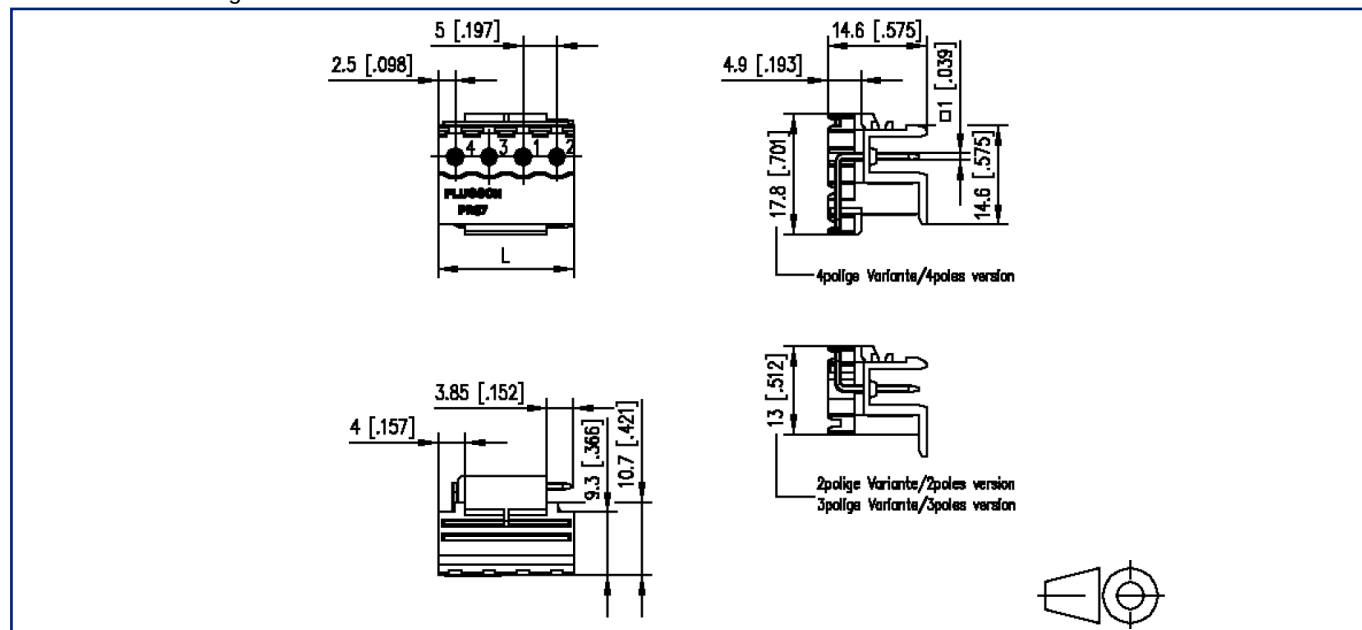

L=(pole size - 1) x centerline + 5 mm [0.197]

U | Contact

Data sheet

PR075xxHBER Type 338

Page 6/6

P/N

313381xx

xx=number of poles

2023/06/28

Version: AJ

Illustrations

Drill pattern

