

P | Cabling

Data sheet

OpDAT 4 UP for 2xSC-Duplex/LC-Quad/ST-Duplex

Page 1/5

P/N

1501105002-E

EAN 4250184106937


2023/05/15

Version: T

Illustrations



Dimensional drawing

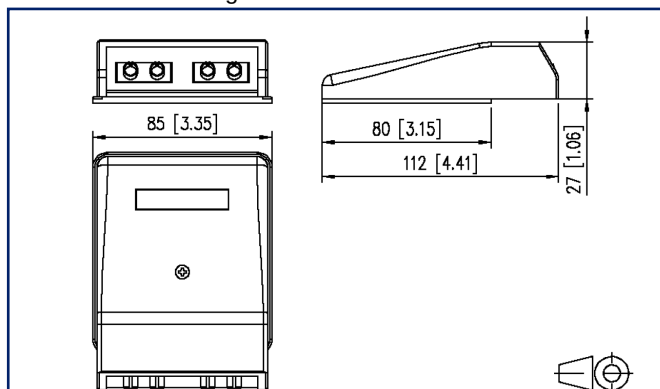

See enlarged drawings at the end of document

Product specification

- glass fiber termination unit for mounting on a wall conduit for fibre optic adapters
- unequipped for simplex or duplex adapters
- plug direction 10° downwards
- strain relief with cable ties possible
- with label window for enclosed identification labels
- suitable for preassembled cables and on-site assembly of plugs
- cover parts in pure white RAL 9010

matching adapters:

simplex

4x LC-D (SC simplex design)

4x SC simplex

4x ST

4x E2000 simplex

duplex

4x FC (ST design)

2x LC-Q

2x SC-D



P | Cabling

Data sheet

Page 2/5

OpDAT 4 UP for 2xSC-Duplex/LC-Quad/ST-Duplex

P/N

1501105002-E

EAN 4250184106937

2023/05/15

Version: T

Illustrations

General Data		
Fields of application	2x SC-D/ST	office areas
Mechanical measurement according to MICE	M1	
Ingress measurement according to MICE	I1	
Climatic measurement according to MICE	C1	
Electromagnetic measurement according to MICE	E3	
Design	wall outlet	
Mounting style	UP	
Color	Pure white RAL 9010	
Dimensions		
Dimension (L x W x H)	27 mm x 85 mm x 112 mm	
Dimension (L x W x H)	1.063 in. x 3.346 in. x 4.409 in.	
Labeling option	label window with identification label	

Connections/interfaces		
Number of ports interface 2	4	
Number of ports interface 2 equipped	0	
Module plug-in direction	10° downwards	

Mechanical data		
strain relief	cable tie	

Materials and material properties		
Material - Housing	Plastics	
Material - Cover part(s)	ABS	
Material - Label window	ABS, transparent	
Material - Dust protection	ABS	
Halogen free	yes	
RoHS	compliant	

Standards/Regulations		
Cover plates for installation devices 1	DIN 49075-1:1989-10	
Cover plates for installation devices 2	DIN 49075-2:1989-10	

P | Cabling

Data sheet

Page 3/5

OpDAT 4 UP for 2xSC-Duplex/LC-Quad/ST-Duplex

P/N

1501105002-E

EAN 4250184106937

2023/05/15

Version: T

Technical Data

Classifications

ETIM 5.0	EC001409
ETIM 6.0	EC001409
ETIM 7.0	EC001409
ETIM 8.0	EC001409
ETIM 9.0	EC001409

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	121 g
Packaging unit - Weight (pound)	0.27 lb
Packaging dimension	83 mm x 33 mm x 140 mm
Packaging dimension	3.268 in. x 1.299 in. x 5.512 in.

P | Cabling

Data sheet

Page 4/5

OpDAT 4 UP for 2xSC-Duplex/LC-Quad/ST-Duplex

P/N

1501105002-E

EAN 4250184106937

2023/05/15

Version: T

Accessories

P/N	Designation
150810-I	OpDAT cable guide for OpDAT 4 UP



P | Cabling

Data sheet

Page 5/5

OpDAT 4 UP for 2xSC-Duplex/LC-Quad/ST-Duplex

P/N

1501105002-E

EAN 4250184106937

2023/05/15

Version: T

Illustrations

Dimensional drawing

