

Data sheet

FT085xxVBFC Type 026

Page 1/5

P/N


310261xx

xx=number of poles


2023/06/26

Version: T


Illustrations

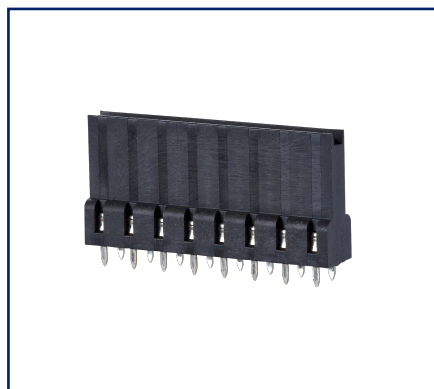

Dimensional drawing

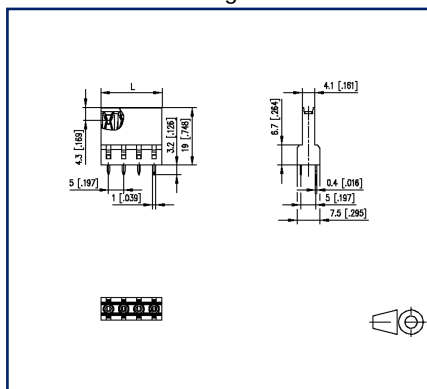

Drill pattern

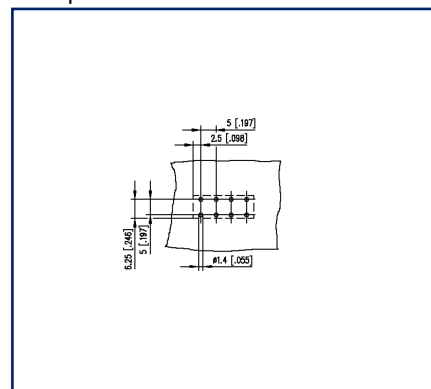

See enlarged drawings at the end of document

Product specification

- female connector, solderable, double solder pins
- centerline 5.00 mm, direction of connection vertical 0°
- fittable without loss of poles
- color black
- board-to-board connection with headers centerline 5.00 mm / 0.197 inches possible



U | Contact

Data sheet FT085xxVBFC Type 026

Page 2/5

P/N
310261xx

xx=number of poles

2023/06/26

Version: T

Technical Data

General Data

Solder pin length	3.2 mm		
min. number of poles	2		
max. number of poles	16		
Insulating material class	CTI 600		
clearance/creepage dist.	4 mm		
Protection category	IP20		
Min. insul. strip length	12 mm		
Rated current	5 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	320 V	800 V	800 V
Rated test voltage	4 kV	4 kV	4 kV

Approvals

1.5 mm²

Material

insulating material	PA66
flammability class	V0
contact material	CuSn
Contact surface	Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
Solderability	Acc. to JEDEC JESD22-B102E 245°C/5s



U | Contact

Data sheet

FT085xxVBFC Type 026

Page 3/5

P/N

310261xx

xx=number of poles

2023/06/26

Version: T

Counterpart

P/N	Designation
310171	PR015xxVBHC Type 017
310191	PT045xxVBEC Type 019
310201	PT045xxVBBN Type 020
310271	PR015xxVBVC Type 027
310291	PT045xxHBEC Type 029
310301	PT045xxHBBN Type 030
310311	PT045xxHBVC Typ 031
310321	PT045xxHBVN Typ 032
310391	PT055xxHBHC Type 039

U | Contact

Data sheet

FT085xxVBFC Type 026

Page 4/5

P/N

310261xx


xx=number of poles

2023/06/26

Version: T

Illustrations

Dimensional drawing

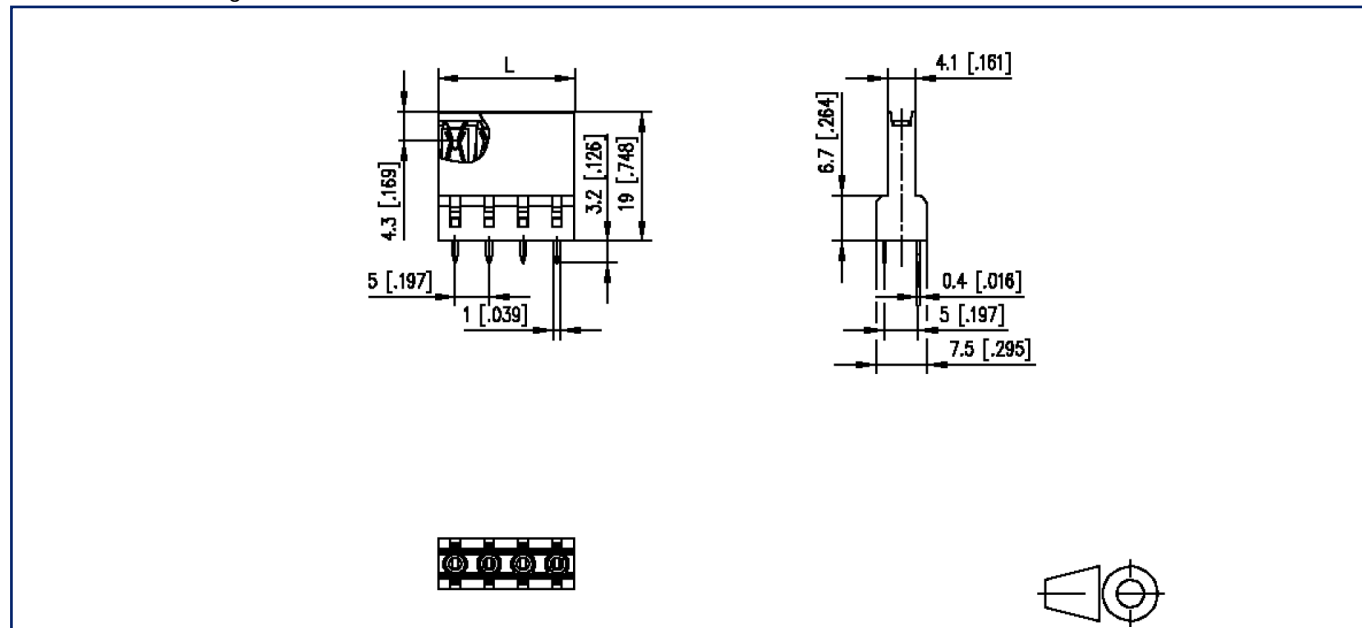

$L = (\text{pole size} - 1) \times \text{centerline} + 5 \text{ mm } [0.197]$



U | Contact

Data sheet

FT085xxVBFC Type 026

Page 5/5

P/N

310261xx

xx=number of poles

2023/06/26

Version: T

Illustrations

Drill pattern

