

P | Cabling

Data sheet

C6_Amodul 6 port 180°M for 1RU

Page 1/8

P/N

130B11P2-E

EAN 4250184131762


2023/04/18

Version: Z

Illustrations



Dimensional drawing

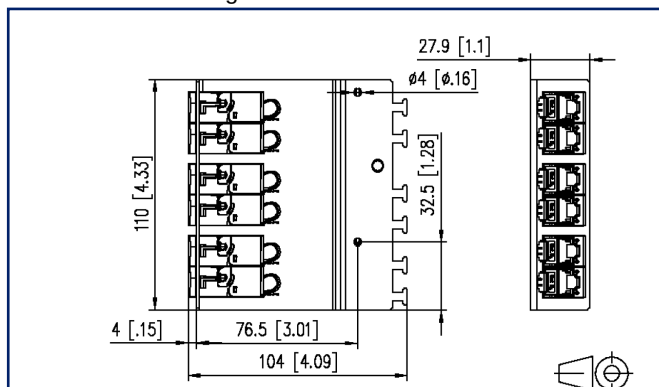

See enlarged drawings at the end of document

Product specification

- module frame with 6 individual C6_Amodul 180°
- certified to GHMT Cat.6_A re-embedded PVP
- Cat.6_A component test according to ISO/IEC 11801, DIN EN 50173-1, ANSI/TIA-568.2-D and IEC 60603-7-51, GHMT certified
- compliance with class E_A up to 500 MHz according to ISO/IEC 11801, DIN EN 50173-1
- tested: component up to 600 MHz, link up to 800 MHz
- suitable for 10 GBit Ethernet (IEEE 802.3an), Remote Powering (PoE, PoE plus, UPoE and 4PPoE) and HDBaseT
- connection of data lines AWG 26/1 to 22/1 (solid wire) and AWG 26/7 to 22/7 (stranded wire) to insulation displacement connectors (IDC)
- migration to 25G-systems without special tools
- strain relief directly snapped on to stuffer cap of C6_Amodul
- for mounting in surface-mounted housing, top hat rail adapter or 1RU module frame
- optional strain relief using cable ties
- grounding bolt M6 x 10 with nut and lock washer



P | Cabling

Data sheet

C6_Amodul 6 port 180°M for 1RU

Page 2/8

P/N

130B11P2-E

EAN 4250184131762

2023/04/18

Version: Z

Technical Data

General Data

Fields of application	structured building cabling office areas Distributed building services data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E2
Design	patch panel
Mounting style	for 1RU
Shielding	shielded
Transmission technology	Copper
Wiring	T568A, T568B
Color	stainless steel
Dimensions	
Dimension (L x W x H)	104 mm x 110 mm x 27.9 mm
Dimension (L x W x H)	4.094 in. x 4.331 in. x 1.098 in.
Height unit	for 1RU
Modularity	yes

Transmission characteristics

Category (ISO)	6 _A
Class (ISO/IEC)	E _A
Category (TIA)	6A
Remote Powering	yes
PoE	IEEE 802.3af
PoE plus	IEEE 802.3at
UPoE	yes
4PPoE	IEEE 802.3bt
HDBaseT	yes
Transmission rate up to 100 MBit (Fast Ethernet)	IEEE 802.3bw
Transmission rate up to 1 GBit (Fast Ethernet)	IEEE 902.3ab
Transmission rate up to 10 GBit	IEEE 802.3an



P | Cabling

Data sheet

C6_Amodul 6 port 180°M for 1RU

Page 3/8

P/N

130B11P2-E

EAN 4250184131762

2023/04/18

Version: Z

Technical Data

Connections/interfaces	
Connector technology interface 1	IDC-connection
Connector technology interface 2	RJ45-jack
Number of ports interface 2	6
Number of ports interface 2 equipped	6
Number of positions/contacts interface 1	6 x 8
Number of positions/contacts interface 2	6 x 8P/8C
Termination data, solid wire (min. - max.)	
Conductor cross section, solid wire	AWG 26/1 - AWG 22/1
Conductor cross section, solid wire	0.128 mm ² - 0.324 mm ²
Conductor diameter, solid wire (bare copper)	0.409 mm - 0.643 mm
Conductor diameter, solid wire (bare copper)	0.016 in. - 0.025 in.
Termination data, stranded wire (min. - max.)	
Conductor cross section, stranded wire	AWG 26/7 - AWG 22/7
Conductor cross section, stranded wire	0.141 mm ² - 0.355 mm ²
Conductor diameter, stranded wire (bare copper)	0.483 mm - 0.762 mm
Conductor diameter, stranded wire (bare copper)	0.019 in. - 0.03 in.
Cable sheath diameter (min. - max.)	
Cable sheath diameter	5.5 mm - 10
Cable sheath diameter	0.197 in. - 0.394
Cable access/outlet	180°
Ground connection	grounding bolt M6x10 with nut and lock washer
Shield connection	flexible contact spring

Electrical characteristics

Current carrying capacity	max. 1 A at 60 °C
Rated voltage	max. 60 V DC
Contact resistance	max. 20 mOhm
Through resistance	max. 200 mOhm
Insulation resistance	min. 500 MOhm
Dielectric strength conductor-conductor (secondary)	max. 1000 V DC
Dielectric strength conductor-conductor, peak value (secondary)	max. 1.000 V AC
Dielectric strength conductor-shield	max. 1500 V DC



P | Cabling

Data sheet

Page 4/8

C6_Amodul 6 port 180°M for 1RU

P/N

130B11P2-E

EAN 4250184131762

2023/04/18

Version: Z

Technical Data

Electrical characteristics

Dielectric strength conductor-shield, peak value	max. 1500 V AC
--	----------------

Mechanical data

Cut-out	module
Insertion and withdrawal force	max. 30 N
Life - Number of mating cycles	min. 750
Position/mounting of latch standard installation position	top
strain relief	latching clip

Materials and material properties

Material - Jack housing	GD-Zn (zinc die-cast)
Material - Jack contact	Spring steel
Material - Jack contact finish	AuCo
Material - Jack shield	CuSn6
Material - Stuffer cap	PA 6.6 UL94 V0
Material - Strain relief	stainless steel
Material - Front cover	stainless steel
Material - Module support	stainless steel
Halogen free	yes
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F



P | Cabling

Data sheet

C6_Amodul 6 port 180°M for 1RU

Page 5/8

P/N

130B11P2-E

EAN 4250184131762

2023/04/18

Version: Z

Technical Data

Certifications

GHMT PVP



yes

Standards/Regulations

Generic cabling systems

General requirements

ISO/IEC 11801-1:2017-11 | DIN EN 50173-1:2018-10
ANSI/TIA-568.2-D

Office buildings

ISO/IEC 11801-2:2017-11 | DIN EN 50173-2:2018-10
ANSI/TIA-568.2-D

Living units

ISO/IEC 11801-4:2017-11 | DIN EN 50173-4:2018-10
ANSI/TIA-570-D

Data centers

ISO/IEC 11801-5:2017-11 | DIN EN 50173-5:2018-10
ANSI/TIA-942-B

Connectors for electronic equipment

Free and fixed connectors

DIN EN 60603-7-51:2011-01, DIN EN 60603-7:2019-11, DIN EN 60603-7-1:2012-01

Connectors for electronic equipment - Tests and measurements

Test standard for connectors (engaging and separating connectors under electrical load)

DIN-EN 60512-99-001, DIN-EN 60512-99-002

Endurance tests

DIN EN 60603-7:2019-11, DIN EN 60603-7-1:2012-01

Climate tests

DIN EN 60603-7:2019-11, DIN EN 60603-7-1:2012-01

Classifications

ETIM 5.0

EC001128

ETIM 6.0

EC001128

ETIM 7.0

EC001128

ETIM 8.0

EC001128

ETIM 9.0

EC001128

Packing details

Type of packaging

1 pc(s) / box

Packaging unit - Weight (gram)

496 g

Packaging unit - Weight (pound)

1.09 lb

Packaging dimension

145 mm x 182 mm x 40 mm

Packaging dimension

5.709 in. x 7.165 in. x 1.575 in.



P | Cabling

Data sheet

Page 6/8

C6_Amodul 6 port 180°M for 1RU

P/N

130B11P2-E

EAN 4250184131762

2023/04/18

Version: Z

Accessories

P/N	Designation
820032-0102-I	Dust protection cover for C6 _A modul pure white
820032-0103-I	Dust protection cover for C6 _A modul light gray
820032-0105-I	Dust protection cover for C6 _A modul yellow
820032-0106-I	Dust protection cover for C6 _A modul blue
820032-0107-I	Dust protection cover for C6 _A modul green
820032-0108-I	Dust protection cover for C6 _A modul red
820032-0129-I	Dust protection cover for C6 _A modul black



P | Cabling

Data sheet

Page 7/8

C6_Amodul 6 port 180°M for 1RU

P/N

130B11P2-E

EAN 4250184131762

2023/04/18

Version: Z

Accessories from

P/N	Designation
1308990110-E	DIN rail adapter
854544-E	Module frame 1RU 19 inch, unequipped
854568-E	Module frame 10 inch 1RU

P | Cabling

Data sheet

C6_Amodul 6 port 180°M for 1RU

Page 8/8

P/N

130B11P2-E

EAN 4250184131762

2023/04/18

Version: Z

Illustrations

Dimensional drawing

