

Data sheet

PT165xxHGDN Type 276

Page 1/7

P/N

312761xx

xx=number of poles


2023/06/28

Version: S


Illustrations



Dimensional drawing

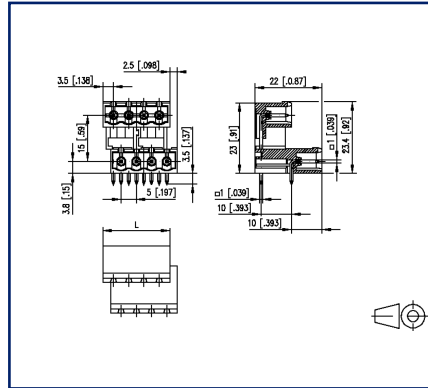

Drill pattern

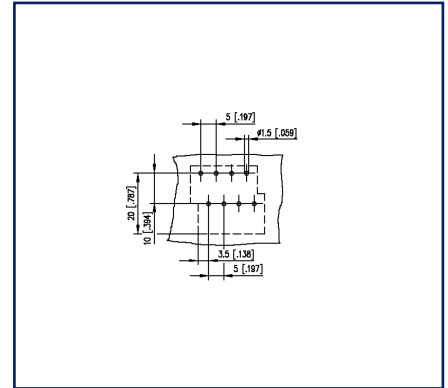

See enlarged drawings at the end of document

Product specification

- pin header, solderable
- centerline 5.00 mm, direction of connection 90°
- closed ends
- color green
- staggered pins, double stacked

U | Contact

Data sheet PT165xxHGDN Type 276

Page 2/7

P/N
312761xx

xx=number of poles

2023/06/28

Version: S

Technical Data

General Data			
Solder pin length	3.5 mm		
min. number of poles	4		
max. number of poles	48		
Insulating material class	CTI 600		
clearance/creepage dist.	4 mm		
Protection category	IP00		
Rated current	12 A		
Overtoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	320 V	800 V	800 V
Rated test voltage	4 kV	4 kV	4 kV
Approvals			
 V / A	300 / 15		
approval UL - File No.	E121004		
 1.5 mm²	320 V / 4 kV / 13.5 A / 1.0 x 1.0 mm		
Material			
insulating material	PA66		
flammability class	V0		
contact pin material	CuSn		
contact pin surface	Ni + Sn		
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12		
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13		
Climatic Data			
upper limit temperature	105 °C		
lower limit temperature	-40 °C		
general			
Tolerance	ISO 2768 -mH		
Solderability	Acc. to JEDEC JESD22-B102E 245°C/5s		

U | Contact

Data sheet

PT165xxHGDN Type 276

Page 3/7

P/N

312761xx

xx=number of poles

2023/06/28

Version: S

Accessories

P/N	Designation
700523-0157	Geh_Kappe_swg_Block

U | Contact

Data sheet

PT165xxHGDN Type 276

Page 4/7

P/N

312761xx

xx=number of poles

2023/06/28

Version: S

Accessories from

P/N	Designation
31274120-6	PT165xxVGDN Typ 274

U | Contact

Data sheet

PT165xxHGDN Type 276

Page 5/7

P/N

312761xx

xx=number of poles

2023/06/28


Version: S

Counterpart of

P/N	Designation
313141	RP035xxHBLD Type 314
31314103-08	RP035xxHBLD Typ 314
31314103-09	RP035xxHBLD Typ 314
313491	RP015xxVBLC Type 349
313501	RP015xxSBLC Type 350
ASP045	SP045xxVBNC ASP045
SP065XXVBNC	SP065xxVBNC
SP065XXVBPC	SP065xxVBPC
SP995XXVBNC	SP995xxVBNC

Illustrations

Dimensional drawing

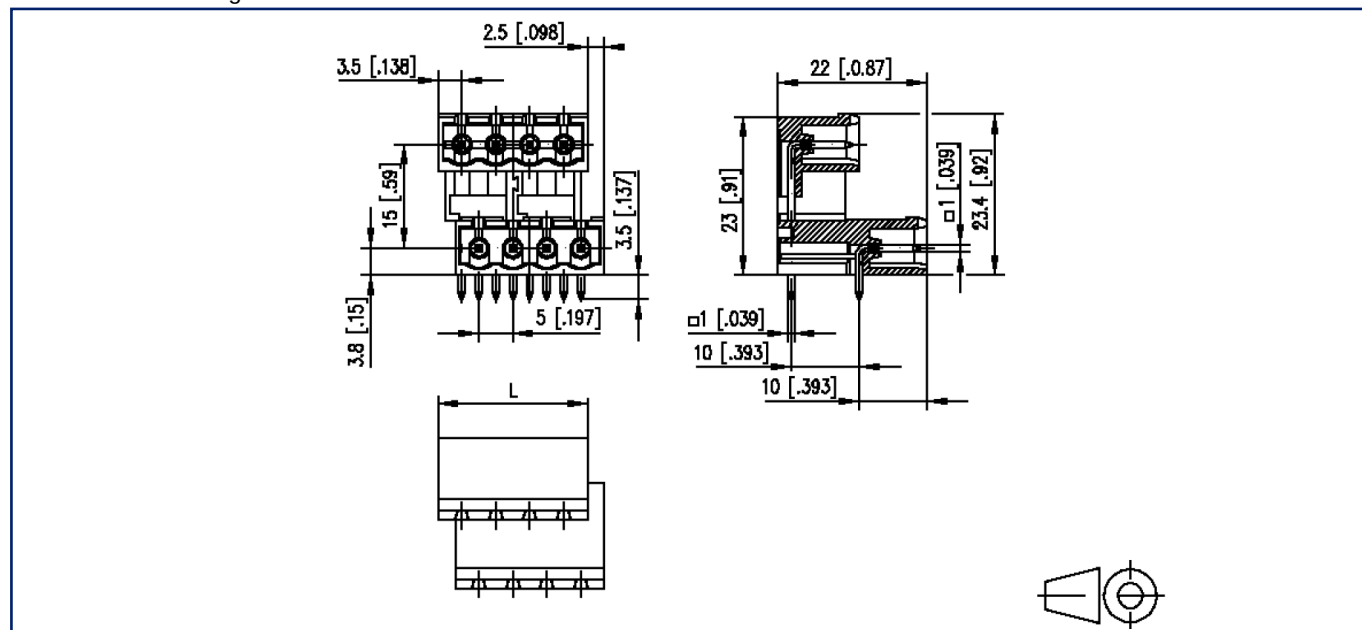

$L = (\text{pole size} - 1) \times \text{centerline} + 7 \text{ mm} [0.276]$

Illustrations

Drill pattern

