

Data sheet


Coding comb orange

Page 1/4


P/N
716906

2023/06/23
Version: P

Illustrations

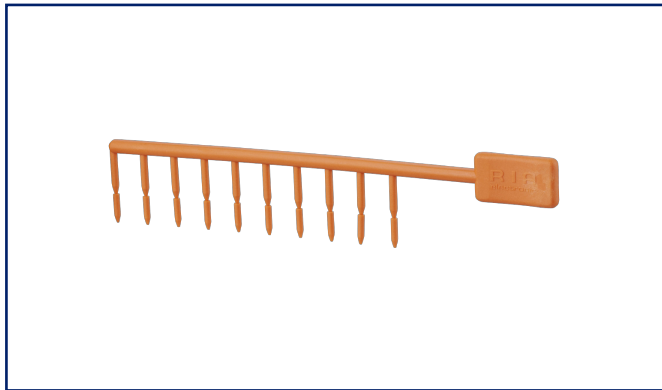

Dimensional drawing

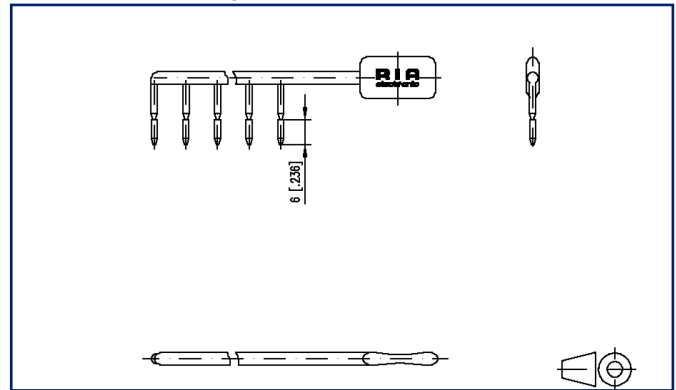

See enlarged drawings at the end of document

Product specification

- The coding pin is inserted into the mating area of the female contact (plug-in). The contact pin should be removed from the respective position of the header.
- This method of coding is associated with a circuit loss
- Group of 10 orange coding pins



U | Contact

Data sheet Coding comb orange

Page 2/4

P/N
716906

2023/06/23
Version: P

Technical Data

Material

insulating material	PA66
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13



U | Contact

Data sheet

Page 3/4

Coding comb orangeP/N
7169062023/06/23
Version: P

Accessories from

P/N	Designation
310091	RP015xxWBWC Type 009
310092	RP019xxWBWC Typ 009
310491	RP015xxWBLC Type 049
310492	RP019xxWBLC Type 049

U | Contact

Data sheet
Coding comb orange

Page 4/4

P/N
716906

2023/06/23
Version: P

Illustrations

Dimensional drawing

