

Data sheet

Mounting flange black for type ASP025

Page 1/4

P/N
720036-02-2


2023/06/23

Version: P

Illustrations



Dimensional drawing

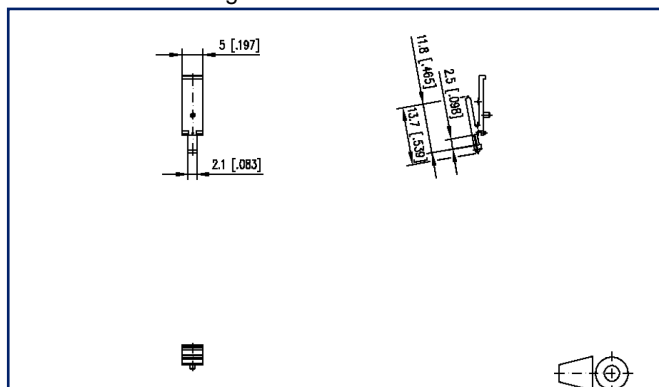

See enlarged drawings at the end of document

Product specification

- The mounting flange is inserted into the mounting hole in the side of the terminal block and secured to the printed circuit board by being press fit into the hole in the printed circuit board
- Mounting flanges for left and right side are necessary for mounting.
- Variants: 720036-01-4 gray for pc board 1.0 mm / 0.039 inches, 720036-02-2 black for pc board 1.50 mm / 0.059 inches



U | Contact

Data sheet

Page 2/4

Mounting flange black for type ASP025

P/N
720036-02-2

2023/06/23

Version: P

Technical Data

Material

| | |
|-----------------------------|-------------------------------|
| insulating material | PA66 |
| Glow-Wire Flammability GWFI | 960 °C acc. to IEC 60695-2-12 |
| Glow-Wire Flammability GWIT | 775 °C acc. to IEC 60695-2-13 |



U | Contact

Data sheet

Page 3/4

Mounting flange black for type ASP025

P/N
720036-02-2

2023/06/23

Version: P

Accessories from

| P/N | Designation |
|----------------|----------------------------|
| ASP025 | SP025xxHDNC ASP025 |
| ASP0250204-001 | SP02502HDNC ASP0250204-001 |
| ASP0250304-001 | SP02503HDNC ASP0250304-001 |
| ASP0250404-004 | SP02504HDNC ASP0250404-004 |
| ASP0250504-002 | SP02505HDNC ASP0250504-002 |
| ASP0250599-000 | SP02505HMNC000 PROFINET |
| ASP0250804-004 | SP02508HDNC ASP0250804-004 |
| ASP029 | SP029xxHDNC ASP029 |

U | Contact

Data sheet

Mounting flange black for type ASP025

Page 4/4

P/N
720036-02-2

2023/06/23
Version: P

Illustrations

Dimensional drawing

