
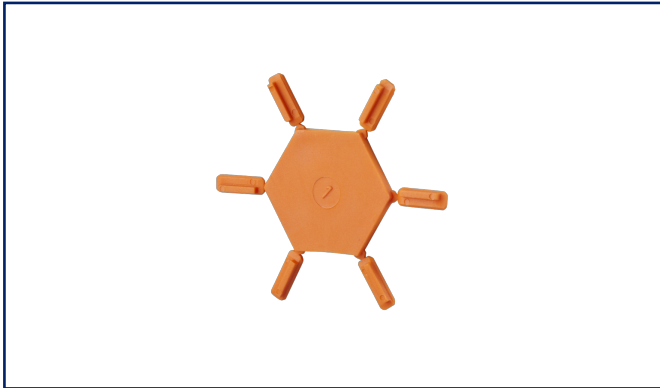


Data sheet
Coding star orange

Page 1/4

P/N
720243-01-32023/06/23
Version: P**Illustrations**

Dimensional drawing

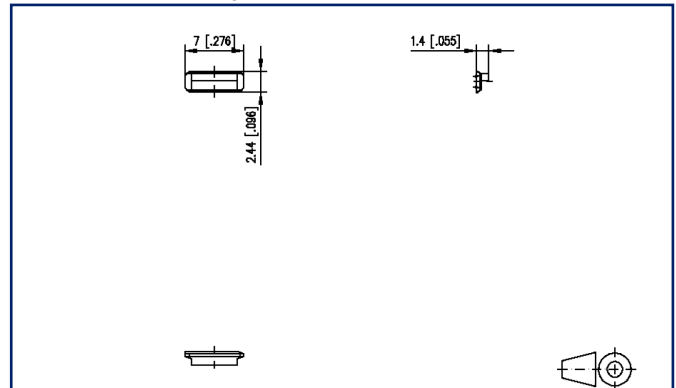

See enlarged drawings at the end of document

Product specification

- The coding pins are inserted into the slots provided in the terminal block and respective header
- This method of coding does not result in any circuit loss. Please refer to the drawing below for further details.
- Variants: 720243-01-3 with 6 coding pins orange left; 720243-02-3 with 6 coding pins orange right, 720243-01-4 6 with 6 coding pins gray left, 720243-02-4 with 6 coding pins gray right



U | Contact

Data sheet
Coding star orange

Page 2/4

P/N
720243-01-3

2023/06/23
Version: P

Technical Data

Material

insulating material	PA66
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13



U | Contact

Data sheet
Coding star orange

Page 3/4

P/N
720243-01-3

2023/06/23
Version: P

Accessories from

P/N	Designation
311691	RP013xxVBWN Type 169
311692	RP01JxxVBWN Typ 169
311811	PT013xxVBBN Typ 181
311821	PT113xxHBBN Type 182
311831	PT113xxVBBN Type 183
311832	PT11JxxVBBN Typ 183

U | Contact

Data sheet
Coding star orange

Page 4/4

P/N
720243-01-3

2023/06/23
Version: P

Illustrations

Dimensional drawing

