

# Data sheet

SP064xxVGNN ASP064


P/N  
ASP064xx

xx=number of poles


2023/06/28

Version: O

## Illustrations

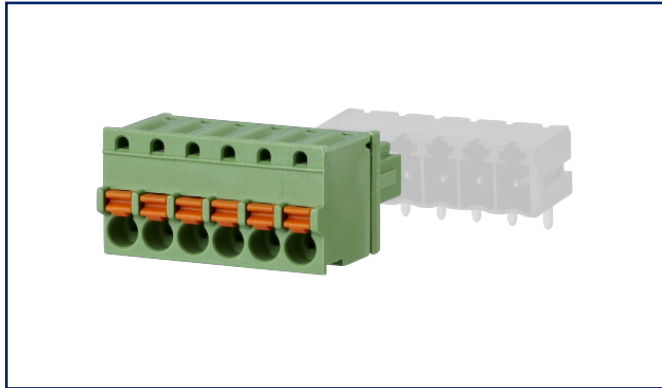

Dimensional drawing

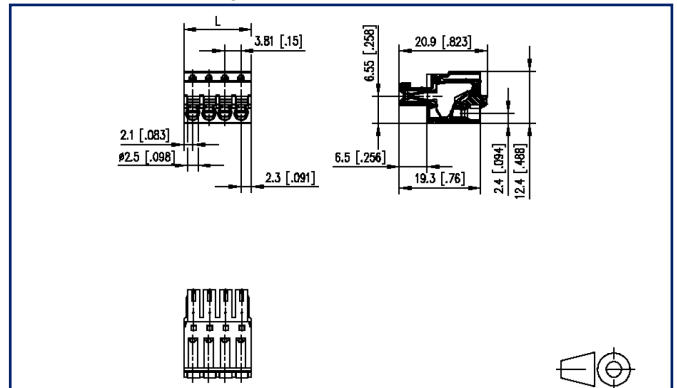

See enlarged drawings at the end of document

## Product specification

- spring clamp terminal block, pluggable
- centerline 3.81 mm, direction of connection vertical 0°
- color green
- push-button, wire entry uncodeable side parallel to plug direction



## Technical Data



### General Data

min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	1.9 mm		
Protection category	IP20		
Min. insul. strip length	9 mm		
Rated current	8 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	50 V	250 V	250 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV

### Terminal data

rat.wiring solid AWGmax	0.08 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 28 - AWG 16		
rat.wiring strand.AWGmax	0.08 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 28 - AWG 16		

### Approvals

 V / A / AWG	150 / 8 / 28 - 16		
approval UL - File No.	E121004		
 1.5 mm <sup>2</sup>	130 V / 2.5 kV / 9 A		

### Material

insulating material	PA66
flammability class	V0
spring material	Spring steel
contact material	CuSn
Contact surface	Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

### Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

### general

# U | Contact

Data sheet

**SP064xxVGNN ASP064**

Page 3/5

P/N

**ASP064xx**

**xx=number of poles**

2023/06/28

Version: O

## Technical Data

Tolerance

ISO 2768 -mH



# U | Contact

Data sheet

**SP064xxVGNN ASP064**

Page 4/5

P/N

**ASP064xx**

**xx=number of poles**

2023/06/28


Version: O

## Counterpart

P/N	Designation
311901	PR044xxHBBN Type 190
311911	PR044xxVBBN Type 191
313821	PT094xxHBBN Type 382
313831	PT094xxVBBN Type 383

## Illustrations

Dimensional drawing

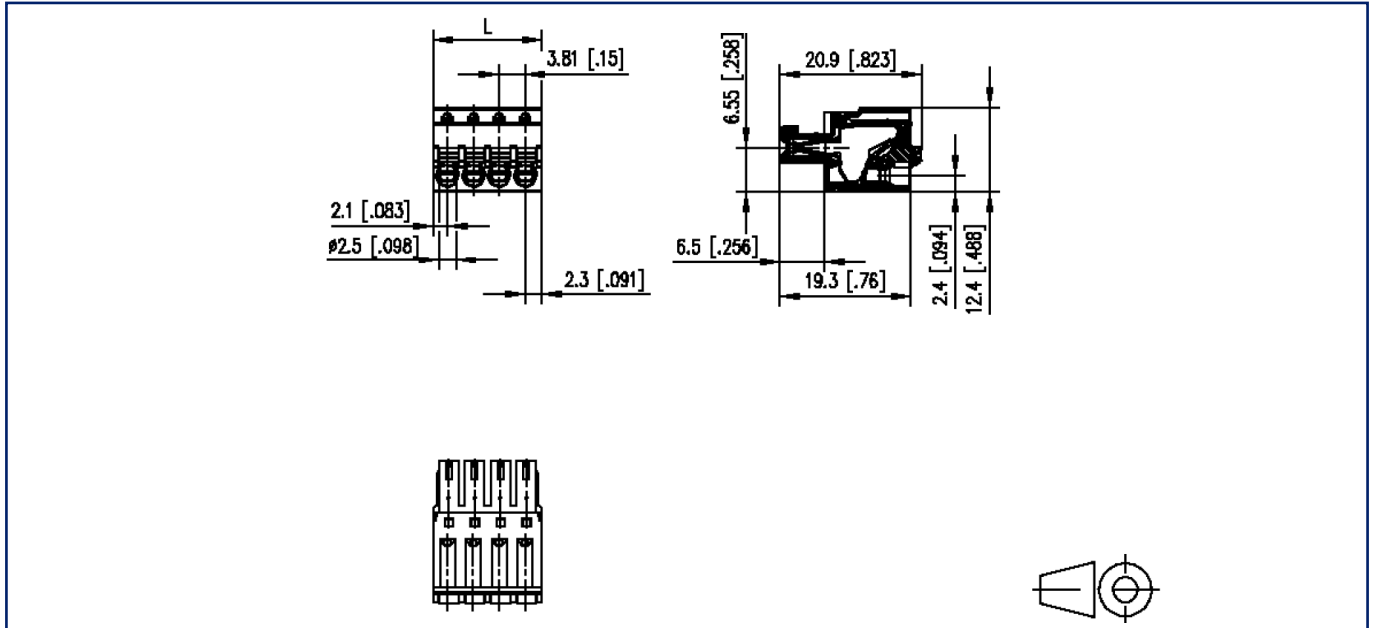

$L = (\text{pole size} - 1) \times \text{centerline} + 4.8 \text{ mm} [0.189]$