



## Illustrations



Dimensional drawing

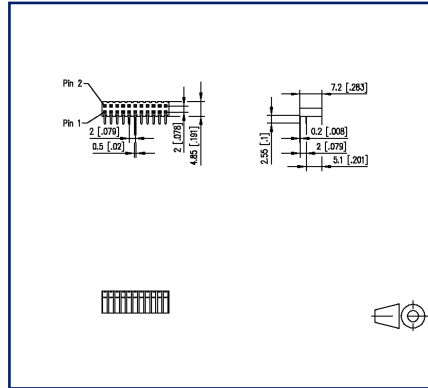

Drill pattern

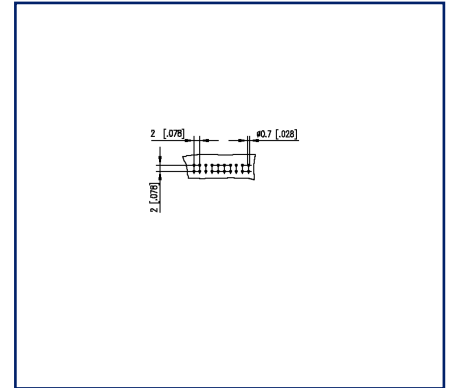

See enlarged drawings at the end of document

## Product specification


- female connector, THR solderable
- centerline 2.00 mm, direction of connection 90°
- closed ends
- color black
- Tape & Reel packaging possible
- double row

## Technical Data

General Data	
Solder pin length	3 mm
min. number of poles	2
max. number of poles	40
clearance/creepage dist.	0.65 mm
Protection category	IP00
Rated current	1 A
Material	
insulating material	PE-HT
contact pin material	CuSn
contact pin surface	Ni + Au Flash
Glow-Wire Flammability GWFI	-
Glow-Wire Flammability GWIT	-
Climatic Data	
upper limit temperature	105 °C
lower limit temperature	-40 °C
general	
Tolerance	ISO 2768 -mH
Solderability	reflowable

## Illustrations

Dimensional drawing

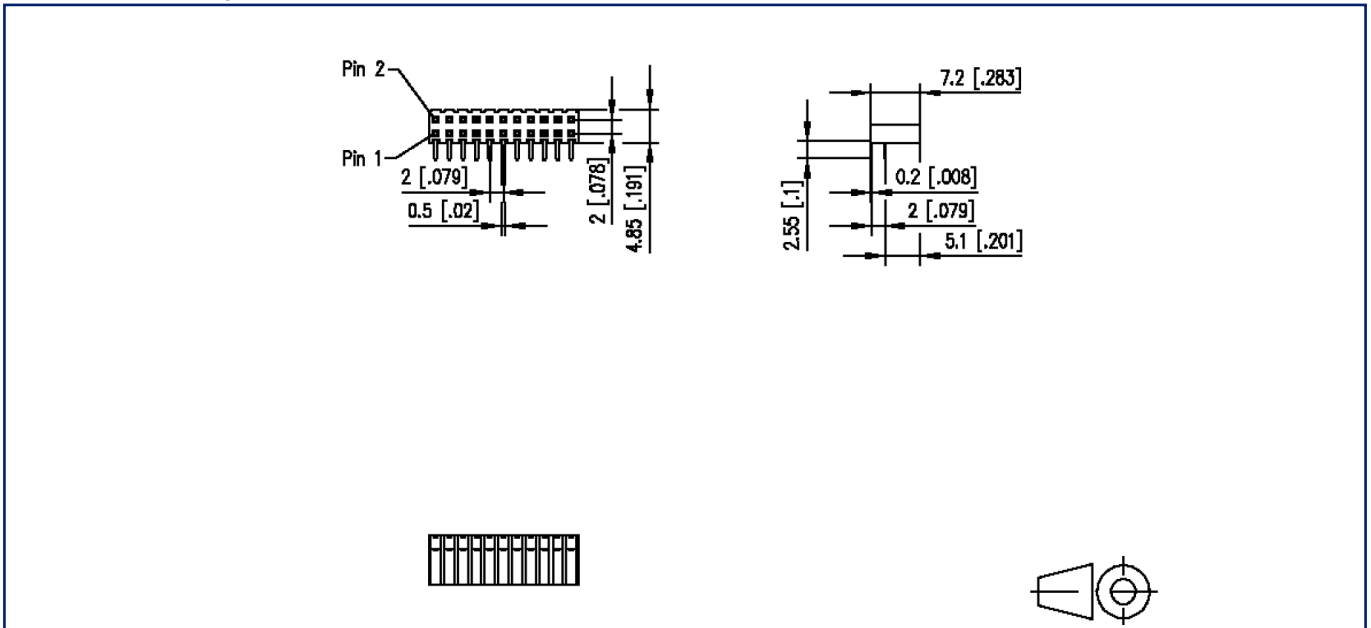

Drill pattern

