


## Data sheet

### REGplus IP20 E2000-D APC OS2

## Illustrations



Dimensional drawing

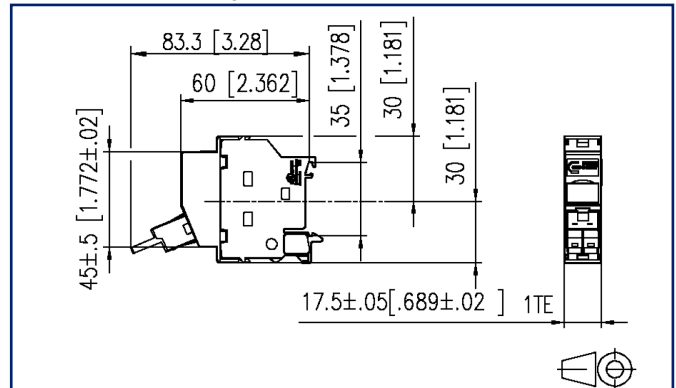

See enlarged drawings at the end of document

## Product specification

- termination with an E2000 DC adapter for mounting on TH35 rail to DIN EN 60715
- slotted zirconium oxide ceramics sleeve (ZrO<sub>2</sub>)
- high material stability and surface quality and long service life
- service life: min. 1000 plug cycles
- cable feed 45° from the top, plug direction 45° downwards
- width of 1HP allows mounting up to 12 REG in standard electrical distribution panels
- to install the adapter, the existing dust protection cover must be removed
- variants: blue (SM), green (SM APC), beige (MM)

# P | Cabling

Data sheet

Page 2/5

## REGplus IP20 E2000-D APC OS2

P/N

130F5C7003-E

EAN 4250184149910

2023/04/17

Version: AA

### Technical Data

#### General Data

Fields of application	office areas
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E2
Design	wall outlet
Mounting style	Standard rail TH35
Transmission technology	Fiber optic
Color	light gray
Dimensions	
Dimension (L x W x H)	83.3 mm x 17.5 mm x 60 mm
Dimension (L x W x H)	3.28 in. x 0.689 in. x 2.362 in.
Horizontal pitch	1HP
Mode type of the fiber	Singlemode
Labeling option	label window with identification label
Marking option	by dust protection

#### Connections/interfaces

Connector technology interface 1	E2000 DC
Connector technology interface 2	E2000 DC
Number of ports interface 1	1
Number of ports interface 2	1
Number of equipped ports interface 1	1
Number of ports interface 2 equipped	1
Number of ports with dust protection interface 1	1
Number of ports with dust protection interface 2	1
Module plug-in direction	45° downwards
Cable access/outlet	45° from the top

# P | Cabling

Data sheet

Page 3/5

## REGplus IP20 E2000-D APC OS2

P/N

130F5C7003-E

EAN 4250184149910

2023/04/17

Version: AA

### Technical Data

#### Mechanical data

Cut-out	E2000 DC
Connector type	duplex
Position/mounting of latch standard installation position	top

#### Materials and material properties

Material - Housing	Plastics
Material - Cover part(s)	PA66
Material - Lower housing	PA66
Material - Label window	ABS, transparent
Material - Sleeve	ceramic, slotted
RoHS	compliant

#### Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F
Increased robustness	yes

#### Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC001130
ETIM 8.0	EC001130
ETIM 9.0	EC001130

#### Packing details

Type of packaging	10 pc(s) / plastic bag
Packaging unit - Weight (gram)	51 g
Packaging unit - Weight (pound)	0.11 lb
Packaging dimension	160 mm x 100 mm x 380 mm
Packaging dimension	6.299 in. x 3.937 in. x 14.961 in.

# P | Cabling

Data sheet

**REGplus IP20 E2000-D APC OS2**

Page 4/5

P/N

**130F5C7003-E**

**EAN 4250184149910**

2023/04/17

Version: AA

## Accessories

P/N	Designation
899011-01	Label sheet for Modul patch panels / REG

© 2023 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!



# P | Cabling

Data sheet

**REGplus IP20 E2000-D APC OS2**

Page 5/5

P/N

**130F5C7003-E**

**EAN 4250184149910**

2023/04/17

Version: AA

## Illustrations

Dimensional drawing

