

P | Cabling

Data sheet

OpDAT 4 AP 2xLC-D MM

Page 1/4

P/N

1501127302-E

EAN 4250184111603


2023/05/15

Version: AC

Illustrations



Dimensional drawing

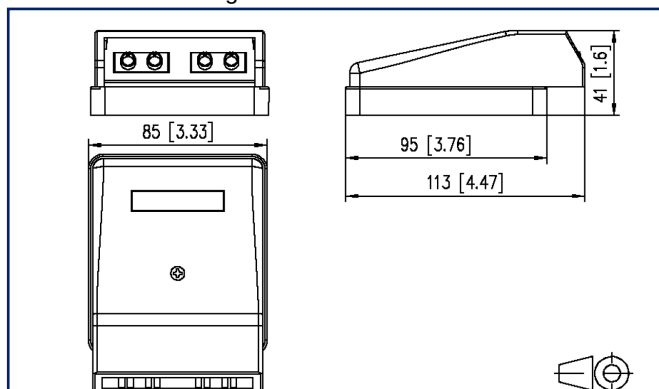

See enlarged drawings at the end of document

Product specification

- fiber optic termination unit for mounting in cable duct / surface mounting with fiber optic adapters
- equipped with 2 LC-D, 2 SC-D or 4 ST adapters
- bending radius of approx. 30 mm is met due to integrated cable reservoir
- plug direction 10° downwards
- strain relief with cable ties possible
- with label window for enclosed identification labels
- suitable for preassembled cables and on-site assembly of plugs
- for mini breakout cables
- cover parts in pure white RAL 9010
- variants: 2 LC-D, 2 SC-D, 4 ST



P | Cabling

Data sheet

OpDAT 4 AP 2xLC-D MM

Page 2/4

P/N

1501127302-E

EAN 4250184111603

2023/05/15

Version: AC

Technical Data

General Data

Fields of application	office areas
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	wall outlet
Mounting style	AP
Transmission technology	Fiber optic
Color	Pure white RAL 9010
Dimensions	
Dimension (L x W x H)	41 mm x 85 mm x 113 mm
Dimension (L x W x H)	1.614 in. x 3.346 in. x 4.449 in.
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	label window with identification label

Connections/interfaces

Connector technology interface 1	LC-D
Connector technology interface 2	LC-D
Number of ports interface 1	2
Number of ports interface 2	2
Number of equipped ports interface 1	2
Number of ports interface 2 equipped	2
Number of ports with dust protection interface 2	2
Module plug-in direction	10° downwards

Mechanical data

Cut-out	SC, LC-D, E2000
Connector type	duplex
Life - Number of mating cycles	min. 1000
strain relief	cable tie



P | Cabling

Data sheet

Page 3/4

OpDAT 4 AP 2xLC-D MM

P/N

1501127302-E

EAN 4250184111603

2023/05/15

Version: AC

Technical Data

Materials and material properties

Material - Housing	Plastics
Material - Surface mount frame	ABS
Material - Cover part(s)	ABS
Material - Label window	ABS, transparent
Material - Coupler housing	Plastics
Material - Sleeve	ceramic, slotted
RoHS	compliant

Classifications

ETIM 5.0	EC001409
ETIM 6.0	EC001409
ETIM 7.0	EC001409
ETIM 8.0	EC001409
ETIM 9.0	EC001409

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	170 g
Packaging unit - Weight (pound)	0.37 lb
Packaging dimension	86 mm x 44 mm x 141.5 mm
Packaging dimension	3.386 in. x 1.732 in. x 5.571 in.



P | Cabling

Data sheet

OpDAT 4 AP 2xLC-D MM

Page 4/4

P/N

1501127302-E

EAN 4250184111603

2023/05/15

Version: AC

Illustrations

Dimensional drawing

