

P | Cabling

Data sheet

OpDAT 4 AP 2xSC-D APC

Page 1/5

P/N

150112F202-E

EAN 4251394609331


2023/07/10

Version: H

Illustrations



Dimensional drawing

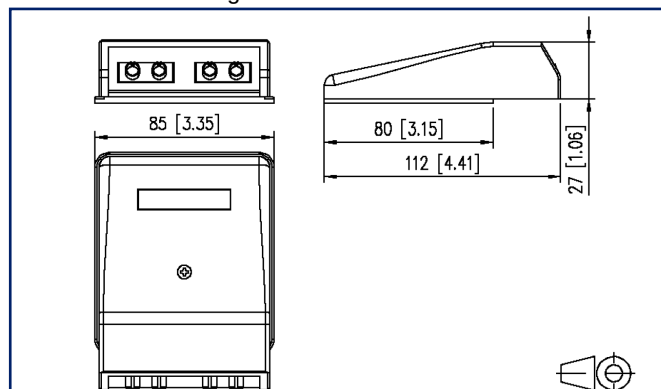

See enlarged drawings at the end of document

Product specification

- fiber optic termination unit for mounting in cable duct / surface mounting with fiber optic adapters
- equipped with 2 SC-D APC adapters
- bending radius of approx. 30 mm is met due to integrated cable reservoir
- plug direction 10° downwards
- strain relief with cable ties possible
- with label window for enclosed identification labels
- suitable for preassembled cables and on-site assembly of plugs
- for mini breakout cables
- cover parts in pure white RAL 9010



P | Cabling

Data sheet

OpDAT 4 AP 2xSC-D APC

Page 2/5

P/N

150112F202-E

EAN 4251394609331

2023/07/10

Version: H

Technical Data

General Data

Fields of application	office areas
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	wall outlet
Mounting style	AP
Transmission technology	Fiber optic
Color	Pure white RAL 9010
Dimensions	
Dimension (L x W x H)	27 mm x 85 mm x 112 mm
Dimension (L x W x H)	1.063 in. x 3.346 in. x 4.409 in.
Mode type of the fiber	Singlemode
Shape	APC (Angled Physical Contact)
Fiber construction	9/125 µm
Labeling option	label window with identification label

Connections/interfaces

Connector technology interface 1	SC-D
Connector technology interface 2	SC-D
Number of ports interface 1	2
Number of ports interface 2	2
Number of equipped ports interface 1	2
Number of ports interface 2 equipped	2
Number of ports with dust protection interface 2	2
Module plug-in direction	10° downwards

Mechanical data

Cut-out	SC-D, LC-Q, ST-D
Connector type	duplex
Life - Number of mating cycles	min. 1000
strain relief	cable tie



P | Cabling

Data sheet

OpDAT 4 AP 2xSC-D APC

Page 3/5

P/N

150112F202-E

EAN 4251394609331

2023/07/10

Version: H

Technical Data

Materials and material properties

Material - Housing	Plastics
Material - Surface mount frame	ABS
Material - Cover part(s)	ABS
Material - Label window	ABS, transparent
Material - Coupler housing	metal
Material - Sleeve	ceramic, slotted
RoHS	compliant

Standards/Regulations

Cover plates for installation devices 1	DIN 49075-1:1989-10
Cover plates for installation devices 2	DIN 49075-2:1989-10

Classifications

ETIM 5.0	EC001409
ETIM 6.0	EC001409
ETIM 7.0	EC001409
ETIM 8.0	EC001409
ETIM 9.0	EC001409

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------



P | Cabling

Data sheet

Page 4/5

OpDAT 4 AP 2xSC-D APC

P/N

150112F202-E

EAN 4251394609331

2023/07/10

Version: H

Accessories

P/N	Designation
15090401-E	OpDAT crimp splice protection (12 pieces)

P | Cabling

Data sheet

OpDAT 4 AP 2xSC-D APC

Page 5/5

P/N

150112F202-E

EAN 4251394609331

2023/07/10

Version: H

Illustrations

Dimensional drawing

