

P | Cabling

Data sheet

OpDAT 4 AP for 2xSC-Duplex/LC-Quad/ST-Duplex

Page 1/4

P/N

1501125002-E

EAN 4250184107255


2023/05/15

Version: U

Illustrations



Dimensional drawing

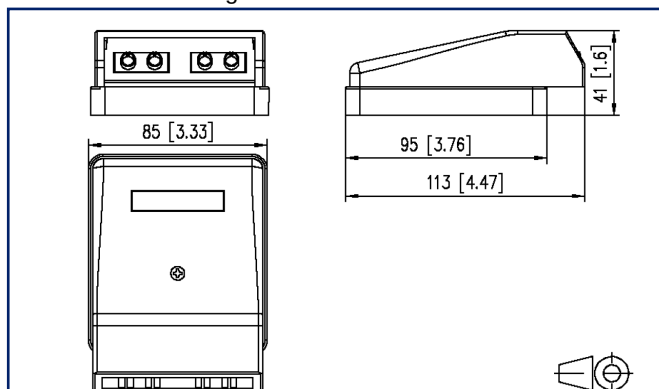

See enlarged drawings at the end of document

Product specification

- fiber optic termination unit for mounting in cable duct / surface mounting with fiber optic adapters
- unequipped for simplex or duplex adapters
- bending radius of approx. 30 mm is met due to integrated cable reservoir
- plug direction 10° downwards
- strain relief with cable ties possible
- with label window for enclosed identification labels
- suitable for preassembled cables and on-site assembly of plugs
- for mini breakout cables
- cover parts in pure white RAL 9010

matching adapters:

simplex

4x LC-D (SC simplex design)

4x SC simplex

4x ST

4x E2000 simplex

duplex

4x FC (ST design)

2x LC-Q



P | Cabling

Data sheet

Page 2/4

OpDAT 4 AP for 2xSC-Duplex/LC-Quad/ST-Duplex

P/N

1501125002-E

EAN 4250184107255

2023/05/15

Version: U

Illustrations

General Data		
Fields of application	2x SC-D	office areas
Mechanical measurement according to MICE	2x ST-D	M1
Ingress measurement according to MICE	2x SC-D/ST	I1
Climatic measurement according to MICE		C1
Electromagnetic measurement according to MICE		E3
Design		wall outlet
Mounting style		AP
Color		Pure white RAL 9010
Dimensions		
Dimension (L x W x H)		41 mm x 85 mm x 113 mm
Dimension (L x W x H)		1.614 in. x 3.346 in. x 4.449 in.
Labeling option		label window with identification label

Connections/interfaces		
Number of ports interface 2		4
Number of ports interface 2 equipped		0
Module plug-in direction		10° downwards

Mechanical data		
strain relief		cable tie

Materials and material properties		
Material - Housing		Plastics
Material - Surface mount frame		ABS
Material - Cover part(s)		ABS
Material - Label window		ABS, transparent
Material - Dust protection		ABS
Halogen free		yes
RoHS		compliant

Classifications		
ETIM 5.0		EC001409
ETIM 6.0		EC001409
ETIM 7.0		EC001409
ETIM 8.0		EC001409

P | Cabling

Data sheet

Page 3/4

OpDAT 4 AP for 2xSC-Duplex/LC-Quad/ST-Duplex

P/N

1501125002-E

EAN 4250184107255

2023/05/15

Version: U

Technical Data

Classifications

ETIM 9.0

EC001409

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	140 g
Packaging unit - Weight (pound)	0.31 lb
Packaging dimension	86 mm x 44 mm x 141.5 mm
Packaging dimension	3.386 in. x 1.732 in. x 5.571 in.



P | Cabling

Data sheet

Page 4/4

OpDAT 4 AP for 2xSC-Duplex/LC-Quad/ST-Duplex

P/N

1501125002-E

EAN 4250184107255

2023/05/15

Version: U

Illustrations

Dimensional drawing

