

Data sheet

E-DAT Industry IP67 V6 for keystone with mounting kit

Page 1/5

P/N

1309413303-E

EAN 4250184106562


2022/10/11

Version: M


Illustrations



Dimensional drawing

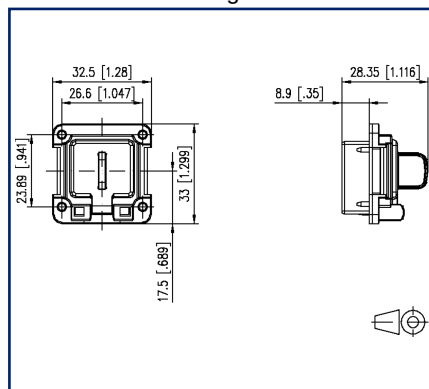

Cut-out

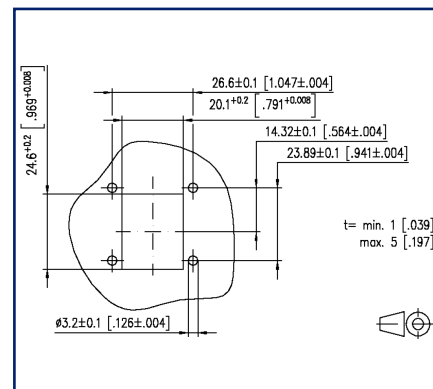

See enlarged drawings at the end of document

Product specification

- for mounting individual modules in Keystone design
- IP67 plug face pursuant to IEC 61076-3-106 (variant 6)
- connection of RJ45 plugs available on the market (no IP protection)
- easy mounting
- versions with and without solid counterplate made of zinc die-cast (also available as accessory)
- color: RAL 7035 (light gray)
- 13094130-E: mounting set consisting of solid counterplate with 4 screws
- not suited to E-DAT industry modules and couplers
- variants: with and without mounting set

P | Cabling

Data sheet

Page 2/5

E-DAT Industry IP67 V6 for keystone with mounting kit

P/N

1309413303-E

EAN 4250184106562

2022/10/11

Version: M

Technical Data

General Data

Fields of application	harsh environment
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	flange housings
Color	light gray
Dimensions	
Dimension (L x W x H)	28.35 mm x 32.5 mm x 33 mm
Dimension (L x W x H)	1.116 in. x 1.28 in. x 1.299 in.
Labeling option	on housing

Connections/interfaces

Number of ports interface 2	1
Number of ports interface 2 equipped	0
Protective housing interface 1	V6
Protective housing interface 2	V6
Module plug-in direction	straight

Mechanical data

Cut-out	Keystone
---------	----------

Materials and material properties

Material - Protective housing	PA UL94 V0
Material - Protective housing seal	HNBR (hydrogenated acrylonitrile butadiene rubber)
Material - Profile seal	NBR (nitrile butadiene rubber)
Material - Protective housing screw(s)	stainless steel
Material - Protective cap	PA UL94 V0
Material - Mounting frame	GD-Zn (zinc die-cast)
RoHS	compliant



P | Cabling

Data sheet

Page 3/5

E-DAT Industry IP67 V6 for keystone with mounting kit

P/N

1309413303-E

EAN 4250184106562

2022/10/11

Version: M

Technical Data

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F
Particulate ingress	IP6X
Liquid ingress/immersion	IPX7
Rapid change of temperature	-40°C / -40°F - +70°C / 158°F / 25 cycles t=30 min
Damp heat	+25°C / +77°F / +65°C / +149°F / 93% RH // -10°C / -14°F 21 cycles
General information	This product is suitable for use in industrial environments inside buildings with IPxy protection class according to DIN EN 60529 specified in this data sheet. Not specified for outdoor applications.

Approvals

UL listed (file no.)



DUXR.E178484

Standards/Regulations

UL standard for Communications-Circuit Accessories	UL 1863
Degrees of Protection Provided by Enclosures	IEC 60529
Connectors for electronic equipment	
Rectangular connectors	DIN EN 61076-3-106

Classifications

ETIM 5.0	EC002597
ETIM 6.0	EC002597
ETIM 7.0	EC000437
ETIM 8.0	EC000437

Packing details

Type of packaging	10 pc(s) / box
Packaging unit - Weight (gram)	314 g
Packaging unit - Weight (pound)	0.69 lb
Packaging dimension	258 mm x 164 mm x 51 mm
Packaging dimension	10.157 in. x 6.457 in. x 2.008 in.



P | Cabling

Data sheet

Page 4/5

E-DAT Industry IP67 V6 for keystone with mounting kit

P/N

1309413303-E

EAN 4250184106562

2022/10/11

Version: M

Accessories

P/N	Designation
130910KI	E-DAT modul Cat.6 _A K jack - Keystone style
130910KI-79	E-DAT modul Cat.6 _A K jack - Keystone style
1309A0-I	E-DAT modul coupler 8(8) 180° class E _A
1309A1-I	E-DAT modul coupler 8(8) 90° class E _A
130B21-E	C6 _A modul K 180° jack - keystone style
130B22-E	C6 _A modul K 270° jack - keystone style
130B23-E	C6 _A modul K 90° jack - keystone style

P | Cabling

Data sheet

Page 5/5

E-DAT Industry IP67 V6 for keystone with mounting kit

P/N

1309413303-E


EAN 4250184106562

2022/10/11

Version: M

Illustrations

Dimensional drawing

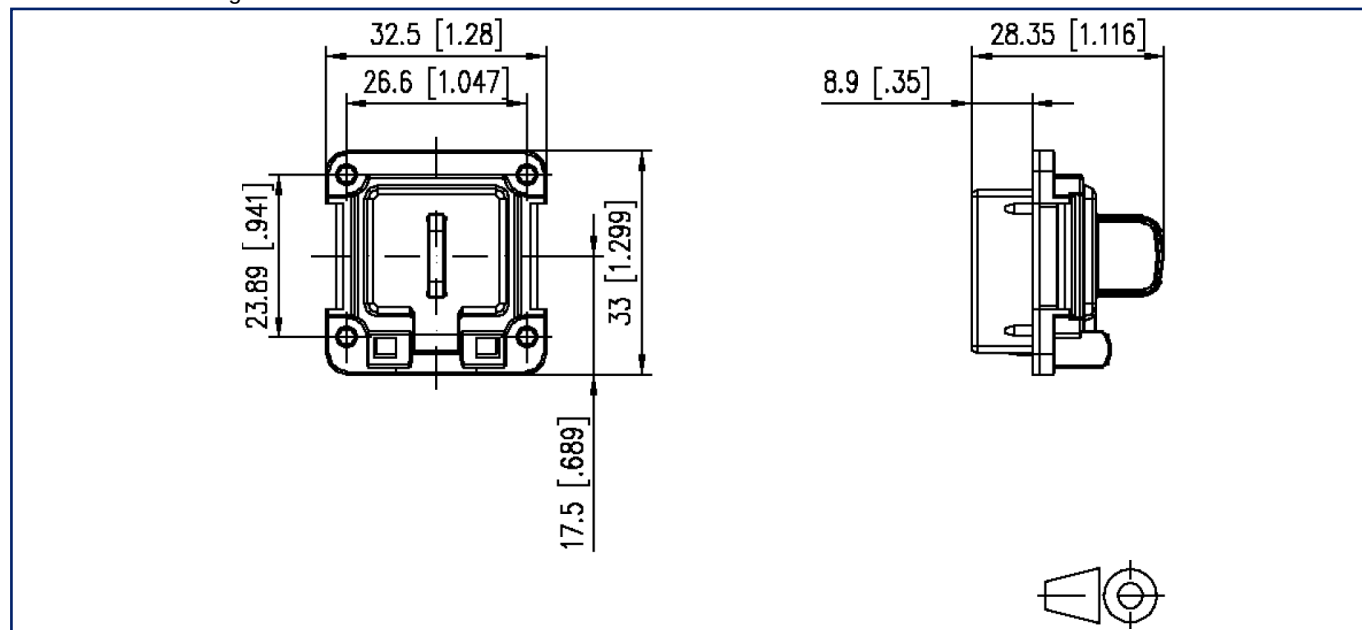

Cut-out

