

Data sheet

MR-DI4-IP65 Modbus RTU, with external display

Page 1/7

P/N


110834131901IP

EAN 4250184162957


2023/06/23

Version: H


Illustrations

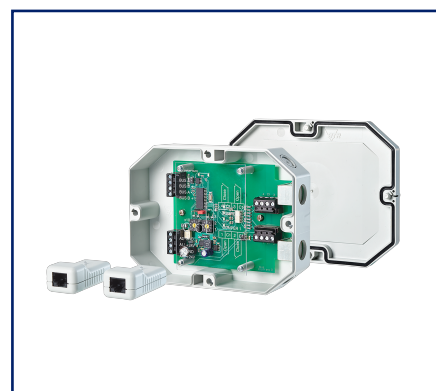

Principle diagram



Wiring diagram

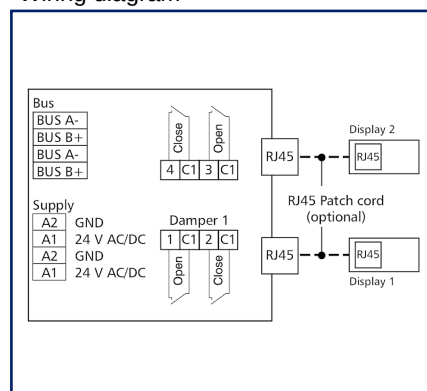

See enlarged drawings at the end of document

Product specification

The Modbus module in a surface mounting housing with 4 digital inputs was developed for decentralized switching tasks. It is suitable for detecting potential-free switch states from electrical limit switches and their external status display such as fire dampers or vent valves. The inputs can be operated by means of potential-free switches or contacts or used as voltage inputs. The inputs can be scanned by means of standard registers via a Modbus master. Module address, bit rate and parity are set with two rotary switches or by software. The device has two externally connectable display modules.



MR-DI4-IP65 Modbus RTU, with external display

P/N

110834131901IP

EAN 4250184162957

2023/06/23

Version: H

Technical Data

RS485 interface	
Protocol	Modbus RTU
Address range	00 - 99
Bus interface	RS485 two wire bus with potential equalization in bus or line topology, terminate with 120 Ohm
Transmission parameters	
Transmission rate	min. 1200 Bit/s (Bd) - max. 115200 Bit/s (Bd)
Transmission rate default setting	19200 Bit/s (Bd)
Parity	None, Even (default setting), Odd
Stopbits	1 (default setting), 2
Supply	
Operating voltage	24 V AC/DC +/- 10 % (SELV)
Power consumption	
Power consumption AC (max.)	50 mA
Power consumption DC (max.)	20 mA
Duty cycle relative	100 %
Inputs	
Digital inputs	4
Voltage input	30 V AC/DC
High signal detection	> 7 V AC/DC
Housing	
Dimensions	
Dimension (W x H x D)	160 mm x 40.7 mm x 120 mm
Dimension (W x H x D)	6.299 in. x 1.602 in. x 4.724 in.
Weight	300 g
Mounting style	directly on a flat surface, 8 knock-out openings for M12 and M16 cable glands
Mounting position	any
Connection type	Spring clamp terminal blocks
Indicator	internal: green, red and yellow LED, external: multi color LED

MR-DI4-IP65 Modbus RTU, with external display

P/N

110834131901IP

EAN 4250184162957

2023/06/23

Version: H

Technical Data

Terminal blocks

Supply and bus

Terminal block	4-pole
Solid wire (AWG)	max. 1.5 mm ² / max. 16 AWG
Stranded wire (AWG)	max. 1 mm ² / max. 18 AWG
Wire diameter	max. 1.4 mm - min. 0.3 mm

Module connection

Wire cross section solid	0.2 mm ² - 1.5 mm ² / AWG 28-18
Wire cross section multi	0.08 mm ² - 0.75 mm ² / AWG 28-18
Wire cross section with wire ferrule	0.08 mm ² - 0.75 mm ² / AWG 28-20
Stripping length (min.)	4 mm

Protection circuit	Polarity reversal protection for DC operating voltage, Protection against interchanging power supply and bus
--------------------	--

Connection for external display modules

RJ45 jack contact 1	1
RJ45 jack contact 2	1

Material

Material - Housing	ASA + Polycarbonat
Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polycarbonat

Protection category according to IEC 60529

Protection category - housing (acc. to IEC 60529)	IP65
Protection category - terminal blocks (acc. to IEC 60529)	IP20

Temperature range

Operating	
Temperature - Operating °C	-5 °C - 55 °C
Temperature - Operating °F	23 °F - 131 °F
Storage	
Temperature - Storage °C	-20 °C - 70 °C
Temperature - Storage °F	-4 °F - 158 °F

MR-DI4-IP65 Modbus RTU, with external display

P/N

110834131901IP

EAN 4250184162957

2023/06/23

Version: H

Technical Data**Classifications**

ETIM 7.0 EC000688

ETIM 8.0 EC000688

ETIM 9.0 EC000688

Software and additional documents

Software and documentation

Further documentation is available for free download at www.metz-connect.com

MR-DI4-IP65 Modbus RTU, with external display

P/N

110834131901IP

EAN 4250184162957

2023/06/23


Version: H

Accessories


P/N	Designation
110486	HUB DC
110561	Power supply NG4 24 V DC
ASP0250404	SP025xxHDNC ASP025

Illustrations

Dimensional drawing

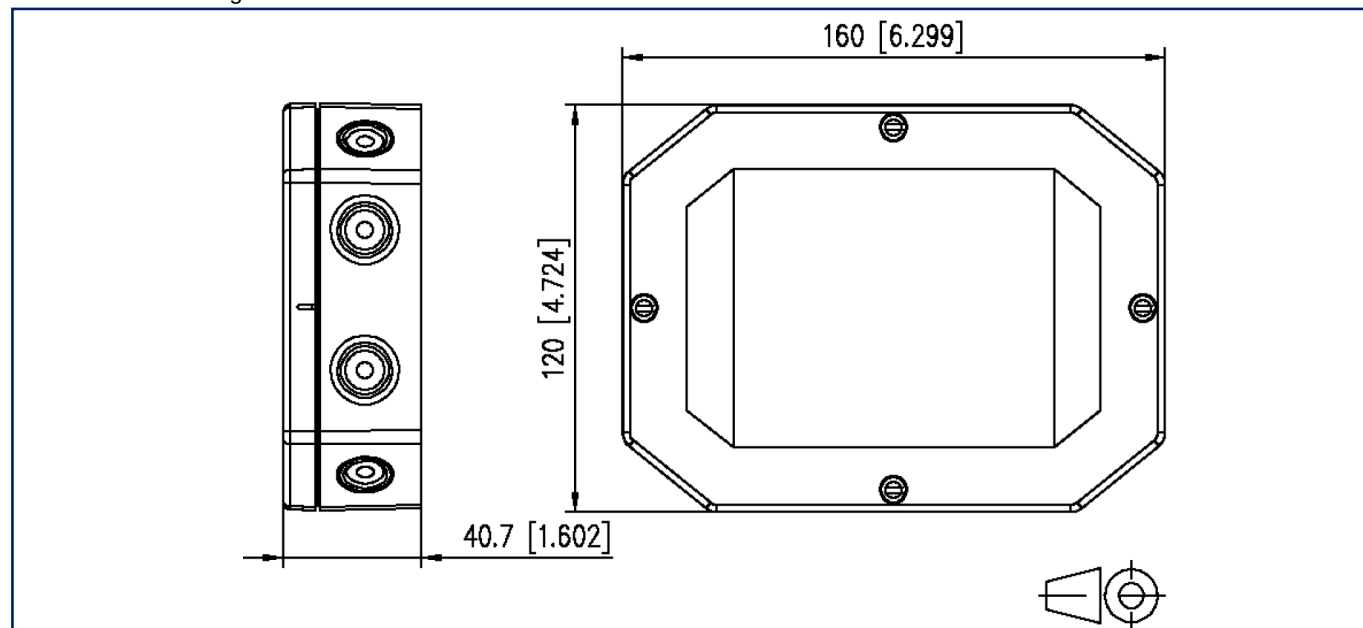

Wiring diagram

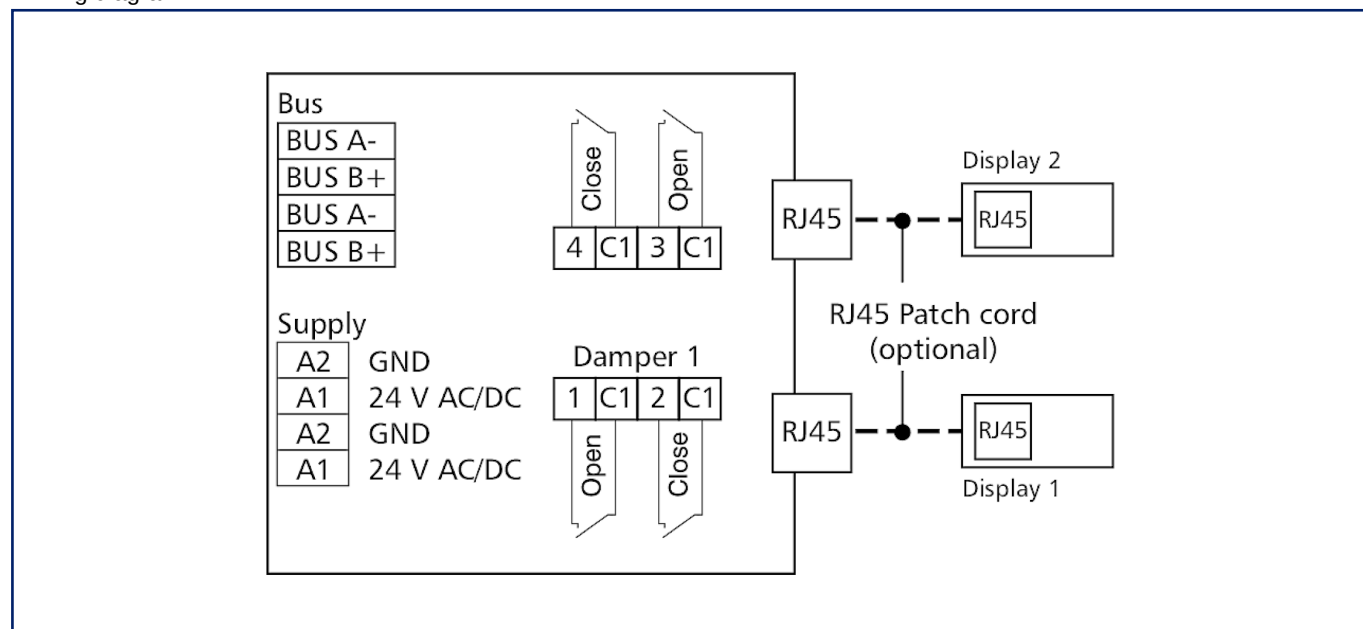

Illustrations

Principle diagram

