

P | Cabling

Data sheet

Surface mount frame 85 x 85 x 35 mm - single, traffic white

Page 1/4

P/N

130829-27-I

EAN 4251394640266


2023/04/04

Version: B


Illustrations



Dimensional drawing

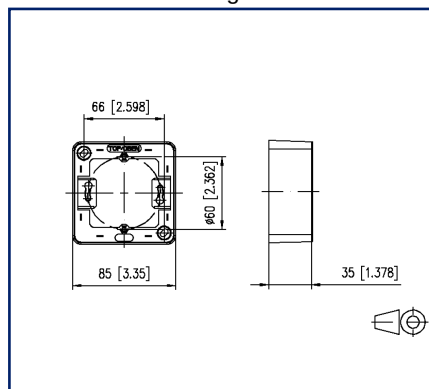

Drill pattern

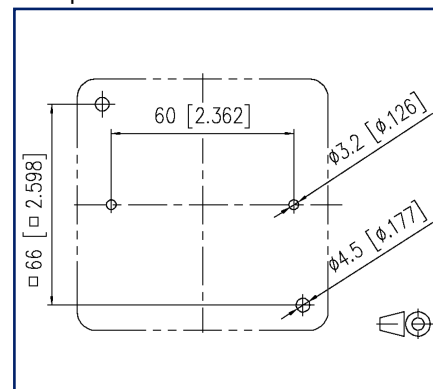

See enlarged drawings at the end of document

Product specification

- extension of flush-mounted wall outlets to surface-mounted wall outlets
- dimensions (LxWxH) 85 x 85 x 35 mm
- additional fastening in 60 mm hole distance on flush-mounted cups
- glossy surface
- traffic white (RAL 9016), pure white (RAL 9010) or pearl white (RAL 1013)
- variants: traffic white, pure white, pearl white

P | Cabling

Data sheet

Page 2/4

Surface mount frame 85 x 85 x 35 mm - single, traffic white

P/N

130829-27-I

EAN 4251394640266

2023/04/04

Version: B

Technical Data

General Data

Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E1
Design	frame
Mounting style	Flush-mounted to wall mounted
Color	traffic white RAL 9016
Dimensions	
Dimension (L x W x H)	35 mm x 85 mm x 85 mm
Dimension (L x W x H)	1.378 in. x 3.346 in. x 3.346 in.

Materials and material properties

Material	ABS
Halogen free	yes
RoHS	compliant

Classifications

ETIM 7.0	EC000080
ETIM 8.0	EC000080
ETIM 9.0	EC000080



P | Cabling

Data sheet

Page 3/4

Surface mount frame 85 x 85 x 35 mm - single, traffic white

P/N

130829-27-I

EAN 4251394640266

2023/04/04

Version: B

Accessories from

P/N	Designation
1307371200-I	E-DAT C6 1 port UP0
1307381200-I	E-DAT C6 2 port UP0
1307441200-I	E-DAT design 2 port UP0 Cat.6
1309111200-E	E-DAT modul 1 port UP0 Cat.6 _A
1309121200-E	E-DAT modul 2 port UP0 Cat.6 _A
1309131200-E	E-DAT modul 3 port UP0 Cat.6 _A
1309141200-E	Modul wall outlet UP0 3 port unequipped
1309151200-E	Modul wall outlet UP0 2 port unequipped
130C371200-I	E-DAT C6 _A 1 port UP0
130C381200-I	E-DAT C6 _A 2 port UP0



