

P | Cabling

Data sheet

Cat.7 cable connector IP67

Page 1/5

P/N

130863-01-E

EAN 4250184113195


2023/04/05

Version: AE


Illustrations



Dimensional drawing

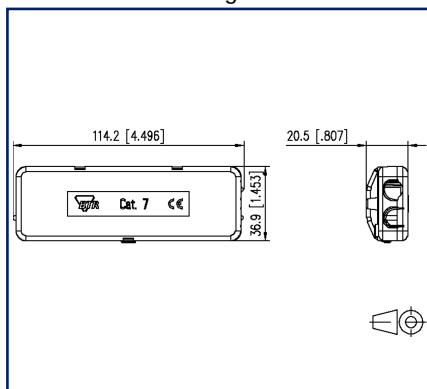

Wiring diagram

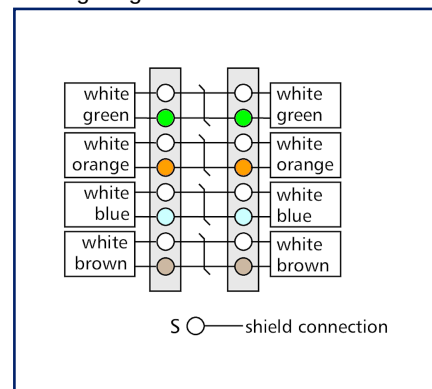

See enlarged drawings at the end of document

Product specification

- for connecting/extending data cables up to Cat.7_A
- IP67 protection due to special shrink tube
- in combination with Cat.6_A to Cat.8 cables and Cat.6_A connection technology, class E_A according to ISO/IEC 11801 is fulfilled
- connection of data lines AWG 26/1 to 22/1 (solid wire)
- cable feed from one or two sides
- cable sharing, i.e. splitting one 8-wire cable into two 4-wire cables (one cable tie required each on input and output side)
- fully shielded metal housing
- strain relief and separate captive 360° shield connection

P | Cabling

Data sheet

Cat.7 cable connector IP67

Page 2/5

P/N

130863-01-E

EAN 4250184113195

2023/04/05

Version: AE

Technical Data

General Data

Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E2
Design	cable connector
Shielding	shielded
Transmission technology	Copper
Color	metallike
Dimensions	
Dimension (L x W x H)	20.5 mm x 114.2 mm x 36.9 mm
Dimension (L x W x H)	0.807 in. x 4.496 in. x 1.453 in.

Transmission characteristics

Category (ISO)	7
----------------	---

Connections/interfaces

Connector technology interface 1	LSA terminal block
Connector technology interface 2	LSA terminal block
Number of ports interface 1	1
Number of ports interface 2	1
Number of equipped ports interface 1	1
Number of ports interface 2 equipped	1
Termination data, solid wire (min. - max.)	
Conductor cross section, solid wire	AWG 26/1 - AWG 22/1
Conductor cross section, solid wire	0.128 mm ² - 0.324 mm ²
Cable sheath diameter (min. - max.)	
Cable sheath diameter	5.5 mm - 9.6
Cable sheath diameter	0.197 in. - 0.354
Reconnectability	yes, if cross section is greater or the same



P | Cabling

Data sheet

Cat.7 cable connector IP67

Page 3/5

P/N

130863-01-E

EAN 4250184113195

2023/04/05

Version: AE

Technical Data

Electrical characteristics

Current carrying capacity	0.5 A
Rated voltage	60 V
Through resistance	max. 5 mOhm
Insulation resistance	min. 100 MOhm
Dielectric strength conductor-conductor (primarily)	750 V DC

Mechanical data

Life - Number of mating cycles	min. 100
--------------------------------	----------

Materials and material properties

Material - Housing	GD-Zn (zinc die-cast)
Halogen free	yes

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-25 °C - 85 °C
Temperature - Storage °F	-13 °F - 185 °F
Temperature - Operating °C	-25 °C - 85 °C
Temperature - Operating °F	-13 °F - 185 °F
Particulate ingress	IP6X
Liquid ingress/immersion	IPX7
Shock	490 m/s ²

Classifications

ETIM 5.0	EC001121
ETIM 6.0	EC001121
ETIM 7.0	EC001121
ETIM 8.0	EC001121
ETIM 9.0	EC001121



P | Cabling

Data sheet

Cat.7 cable connector IP67

Page 4/5

P/N

130863-01-E

EAN 4250184113195

2023/04/05

Version: AE

Technical Data

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	373 g
Packaging unit - Weight (pound)	0.82 lb
Packaging dimension	258 mm x 164 mm x 51 mm
Packaging dimension	10.157 in. x 6.457 in. x 2.008 in.



P | Cabling

Data sheet

Cat.7 cable connector IP67

Page 5/5

P/N

130863-01-E


EAN 4250184113195

2023/04/05

Version: AE

Illustrations

Dimensional drawing

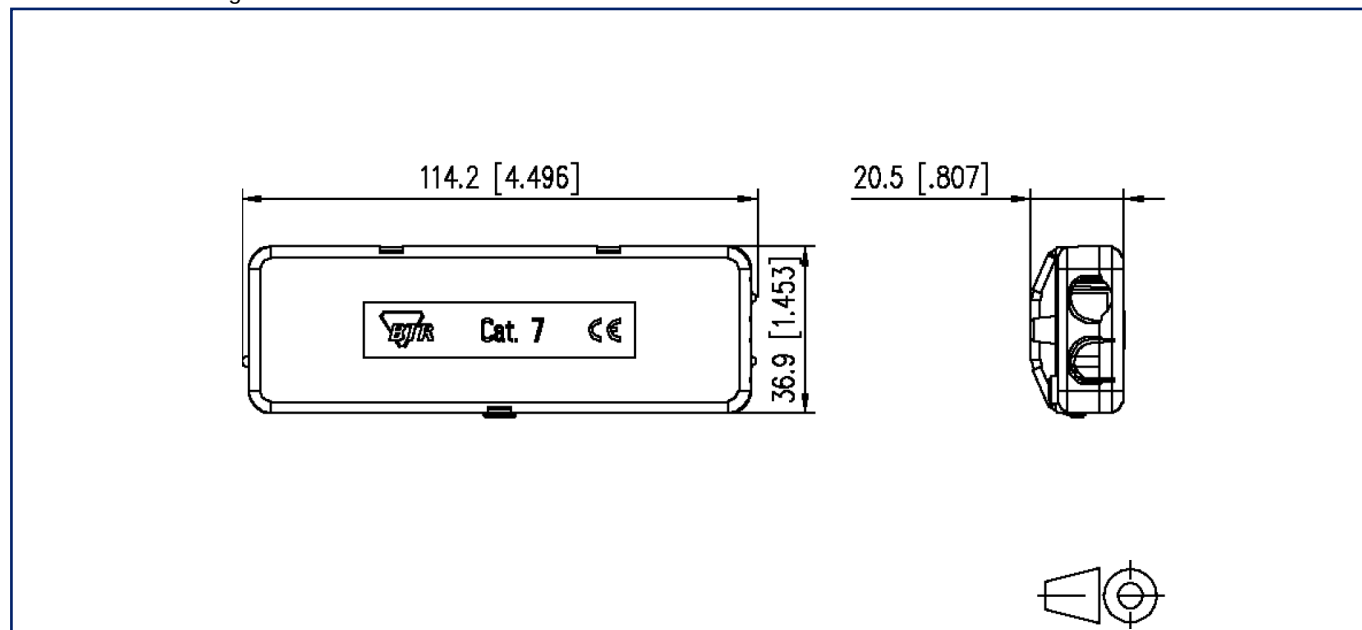

Wiring diagram

