

P | Cabling

Data sheet

OpDAT VADT splice 2xSC APC OS2, cable Ø2.3 mm

Page 1/5


P/N
150F029HF00XXE

2023/04/13

Illustrations



Dimensional drawing

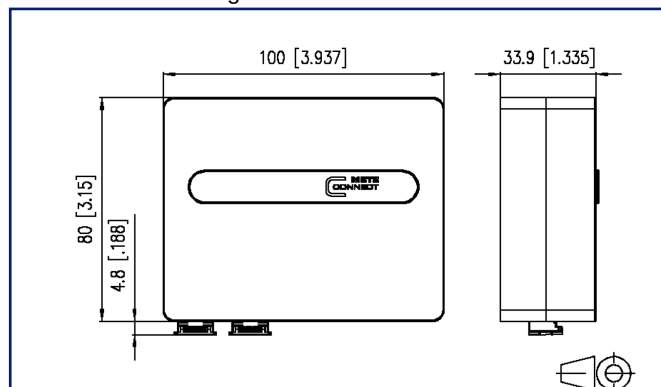

See enlarged drawings at the end of document

Product specification

- compact fiber optic termination unit for flush mounted outlets or cavity wall boxes
- Box ready for installation, pre-terminated with singlemode indoor cable and equipped with adapters including laser protection for the connection of up to four fiber optic patch cables.
- The second cable end is open to be inserted, pulled in or blown into empty tubes. Suitable for splicing or for mounting field attachable fiber optic connectors (OpDAT FAST® Hybrid).
- cable easy to mount on carton drum
- Two cable types available:
 - Mini Breakout Cable Compact, white, Ø 4.5 mm
 - FITH cable, white, Ø 2.3 mm
- single mode fiber OS2, E9/125 µm, bend insensitive according to ITU-T G.657.A, compatible to G.652.D
- supplied with fixing material
- color box pure white (similar to RAL 9010)
- cable lengths: 5 to 100 m in 5 m steps
- (replace XX in the part number by the length, for example 05=5 m, A0=100 m)
- all available variants can be created with the VADT configurator



P | Cabling

Data sheet

Page 2/5

OpDAT VADT splice 2xSC APC OS2, cable Ø2.3 mm

P/N
150F029HF00XXE

2023/04/13

Technical Data

General Data	
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	wall outlet
Mounting style	AP
Transmission technology	Fiber optic
Color	white
Dimensions	
Dimension (L x W x H)	85 mm x 100 mm x 35 mm
Dimension (L x W x H)	3.346 in. x 3.937 in. x 1.378 in.
Mode type of the fiber	Singlemode
Fiber class	OS2: IEC 60793-2-50 B6_a, B6_b & ITU-T G.657.A2, G.657.B2, G.652.D
Shape	APC (Angled Physical Contact)
Fiber construction	9/125 µm
Connections/interfaces	
Connector technology interface 1	SC APC
Number of ports interface 1	4
Number of equipped ports interface 1	2
Number of blind	2
Cable sheath diameter (min. - max.)	
Cable sheath diameter	2.3
Cable sheath diameter	0.091
Cable access/outlet	bottom
Elektrische/ Optische Eigenschaften	
Insertion loss	max. 0,3 dB
Return loss	min. 65 dB

P | Cabling

Data sheet

Page 4/5

OpDAT VADT splice 2xSC APC OS2, cable Ø2.3 mm

P/N
150F029HF00XXE

2023/04/13

Technical Data

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------



P | Cabling

Data sheet

OpDAT VADT splice 2xSC APC OS2, cable Ø2.3 mm

Page 5/5

P/N
150F029HF00XXE

2023/04/13

Illustrations

Dimensional drawing

