

Data sheet

DCCS subassembly OM3 6xLC-Duplex


Page 1/5

P/N
130D205J00000N
EAN 4251394644875
2023/04/26
Version: A

Illustrations



Dimensional drawing

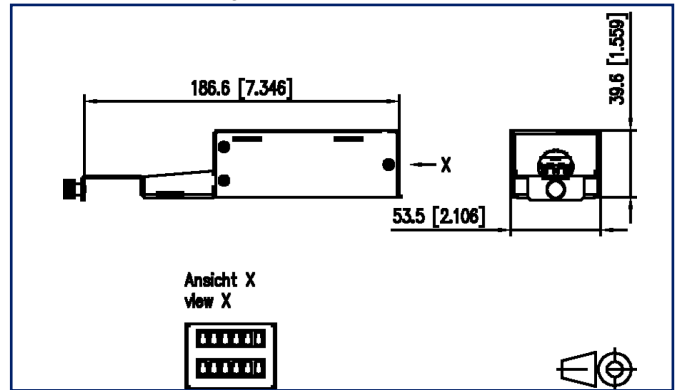

See enlarged drawings at the end of document

Product specification

- DCCS housing with 6 LC duplex adapters front mounted
- easy assembly/disassembly in DCCS subrack (19 inch, 1 RU)
- suitable for the installation of pre-terminated installation cables (VIK) with mini breakout cables in customer specific lengths
- housing: galvanized sheet steel, stainless steel front, strain relief via M20 cable gland
- variants: blue (SM), green (SM APC), lime green (OM5), violet (OM4), aqua (OM3)
- all available variants can be created with the configurator

P | Cabling

Data sheet

Page 2/5

DCCS subassembly OM3 6xLC-Duplex

P/N

130D205J00000N

EAN 4251394644875

2023/04/26

Version: A

Technical Data

General Data

| | |
|---|--|
| Fields of application | structured building cabling office areas data center |
| Mechanical measurement according to MICE | M1 |
| Ingress measurement according to MICE | I1 |
| Climatic measurement according to MICE | C1 |
| Electromagnetic measurement according to MICE | E3 |
| Design | subassembly / assembly / module / unit |
| Mounting style | DCCS |
| Transmission technology | Fiber optic |
| Port numbering | yes |
| Color | aqua |
| Dimensions | |
| Dimension (L x W x H) | 186.6 mm x 53.5 mm x 39.6 mm |
| Dimension (L x W x H) | 7.346 in. x 2.106 in. x 1.559 in. |
| Inches | 19 inches |
| Fiber class | for OM3 |
| Mode type of the fiber | Multimode |

Connections/interfaces

| | |
|--|---------------|
| Connector technology interface 1 | LC-D Couplers |
| Number of ports interface 1 | 6 |
| Number of equipped ports interface 1 | 6 |
| Number of ports with dust protection interface 1 | 6 |
| Number of ports with dust protection interface 2 | 6 |

Mechanical data

| | |
|--------------------------------|-----------|
| Cut-out | DCCS |
| Connector type | duplex |
| Life - Number of mating cycles | min. 1000 |
| strain relief | yes |

P | Cabling

Data sheet

Page 3/5

DCCS subassembly OM3 6xLC-Duplex

P/N

130D205J00000N

EAN 4251394644875

2023/04/26

Version: A

Technical Data

Materials and material properties

| | |
|------------------------------------|------------------|
| Material - Assembly housing | sheet steel |
| Material - Assembly housing finish | Zn (zinc) |
| Material - Sleeve | ceramic, slotted |
| Material - Coupler housing | Plastics |
| Halogen free | yes |
| RoHS | compliant |

Classifications

| | |
|----------|----------|
| ETIM 5.0 | EC002697 |
| ETIM 6.0 | EC002699 |
| ETIM 7.0 | EC001129 |
| ETIM 8.0 | EC001129 |
| ETIM 9.0 | EC001129 |

Packing details

| | |
|-------------------|---------------|
| Type of packaging | 1 pc(s) / box |
|-------------------|---------------|

P | Cabling

Data sheet

Page 4/5

DCCS subassembly OM3 6xLC-Duplex

P/N

130D205J00000N

EAN 4251394644875

2023/04/26

Version: A

Accessories

| P/N | Designation |
|------------|--|
| 130D2B1B-E | DCCS2 BGT 19 inch 1RU subrack black |
| 130D2B1G-E | DCCS2 BGT 19 inch 1RU subrack light gray |

© 2023 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!



P | Cabling

Data sheet

Page 5/5

DCCS subassembly OM3 6xLC-Duplex

P/N

130D205J00000N

EAN 4251394644875

2023/04/26

Version: A

Illustrations

Dimensional drawing

