

Data sheet

DCCS subassembly OM3 6xMTP type A

Page 1/5

P/N


130D205M0000A

EAN 4251394644882


2023/04/26

Version: A

Illustrations

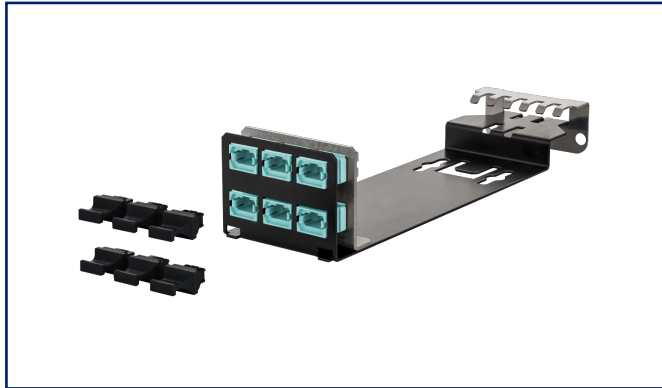

Dimensional drawing

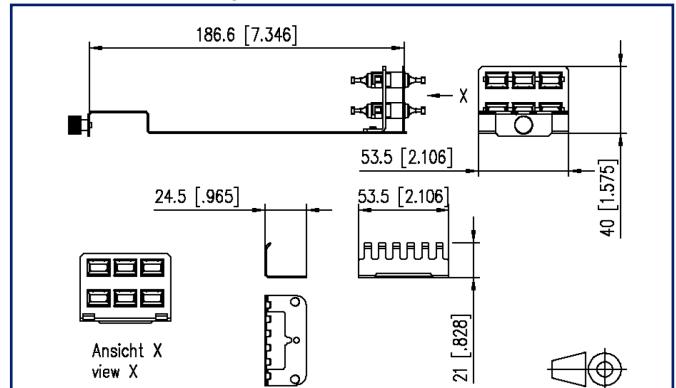

See enlarged drawings at the end of document

Product specification

- DCCS holder with 6 MPO/MTP adapters front mounted
- MM adapters available for "aligned" (key up/key up, type B) and "opposed" (key up/key down, type A) assignment
- SM adapters available for "opposed" assignment (key up/key down, type A)
- easy assembly/disassembly in DCCS subrack (19 inch, 1 RU)
- suitable for installation of MPO/MTP câbles de liaison in customer specific lengths
- housing: black powder-coated steel-sheet housing, strain relief via included holder
- variants: green (SM), lime green (OM5), violet (OM4), aqua (OM3), assignment type A, assignment type B
- all available variants can be created with the configurator



DCCS subassembly OM3 6xMTP type A

P/N

130D205M00000A

EAN 4251394644882

2023/04/26

Version: A

Technical Data

General Data

Fields of application	structured building cabling office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	subassembly / assembly / module / unit
Mounting style	DCCS
Transmission technology	Fiber optic
Port numbering	yes
Color	aqua
Dimensions	
Dimension (L x W x H)	211 mm x 53 mm x 40 mm
Dimension (L x W x H)	8.307 in. x 2.087 in. x 1.575 in.
Fiber class	for OM3
Mode type of the fiber	Multimode

Connections/interfaces

Connector technology interface 1	MPO/MTP adapters Key up / Key down
Number of ports interface 1	6
Number of equipped ports interface 1	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6

Mechanical data

Cut-out	DCCS
Life - Number of mating cycles	min. 500
strain relief	optional

Materials and material properties

Material - Assembly housing	sheet steel
Material - Coupler housing	PEI (polyetherimide)
Material - Dust protection	PC (polycarbonate)

P | Cabling

Data sheet

Page 3/5

DCCS subassembly OM3 6xMTP type A

P/N

130D205M00000A

EAN 4251394644882

2023/04/26

Version: A

Technical Data

Materials and material properties

Halogen free	yes
--------------	-----

RoHS	compliant
------	-----------

Classifications

ETIM 5.0	EC002697
----------	----------

ETIM 6.0	EC002699
----------	----------

ETIM 7.0	EC001129
----------	----------

ETIM 8.0	EC001129
----------	----------

ETIM 9.0	EC001129
----------	----------

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------



P | Cabling

Data sheet

Page 4/5

DCCS subassembly OM3 6xMTP type A

P/N

130D205M00000A

EAN 4251394644882

2023/04/26

Version: A

Accessories from

P/N	Designation
130D2B1B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B1G-E	DCCS2 BGT 19 inch 1RU subrack light gray



P | Cabling

Data sheet

Page 5/5

DCCS subassembly OM3 6xMTP type A

P/N

130D205M0000A


EAN 4251394644882

2023/04/26

Version: A

Illustrations

Dimensional drawing

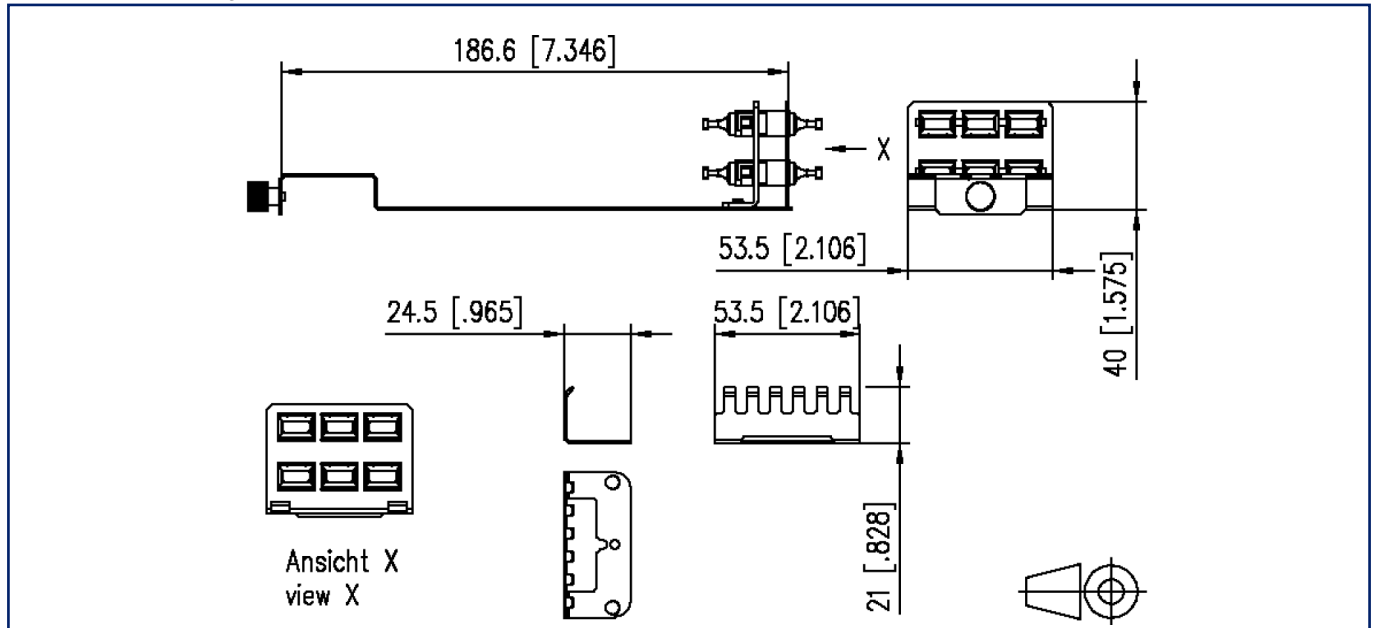

© 2023 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!