

Data sheet

PC board jack M12, D-coded, 4-pole, IP67,
rear mounting

Page 1/5

P/N
MMT371A115

EAN 4251394621999


2023/07/04

Version: J


Illustrations



Dimensional drawing

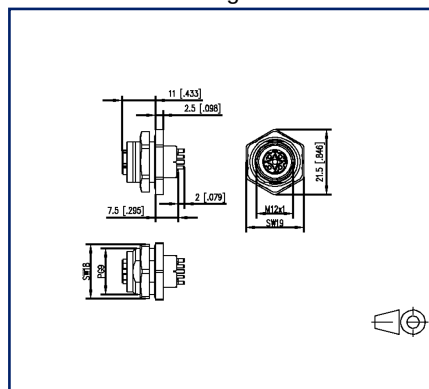

Drill pattern

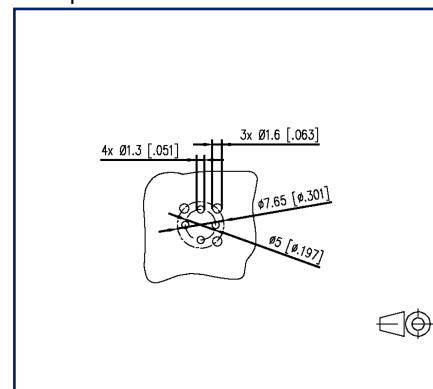

See enlarged drawings at the end of document

Product specification

- PC board jack M12
- Cat.5
- 4-pole, D-coded according to IEC 61076-02-101
- rear wall mounting
- for 100 MBit Fast Ethernet (IEEE 802.3an)
- THR solderable
- Top entry
- Contact carriers green
- IP67 when plugged in
- suitable for applications in the railway industry according to data sheet



PC board jack M12, D-coded, 4-pole, IP67, rear mounting

P/N

MMT371A115

EAN 4251394621999

2023/07/04

Version: J

Technical Data

General Data

Dimensions

Dimension (D x H)	Ø 21.5 mm x 20.5 mm
Dimension (D x H)	0.846 in. x 0.807 in.
Ports	Single port
Coding	D-coded

Electrical characteristics

Rated voltage	250 V
Current carrying capacity at 40 °C	4 A
Insulation resistance	min. 100 MOhm
Overvoltage category	II
Degree of pollution	2

Mechanical data

Material

Material - Housing	CuZnPb
Material - Contact	CuZnPb
Contact surface	Ni + Au
Shield material	CuSn
Material - Insulating body	PA UL94 V0
Color	metallike
Life - Number of mating cycles	>= 100
Tightening torque - Plug	0,6 - 1 Nm
Tightening torque - Jack mounting	3 Nm +/- 0,5 Nm
Protection category	IP67 when plugged in

Climatic properties

Temperature - Operating °C	-40 °C - 85 °C
Temperature - Operating °F	-40 °F - 185 °F



U | Contact

Data sheet

Page 3/5

PC board jack M12, D-coded, 4-pole, IP67, rear mounting

P/N

MMT371A115

EAN 4251394621999

2023/07/04

Version: J

Technical Data

Approvals

Approval mark UL pending

Packaging

Type of packaging 10 pc(s) / blister packaging

Standards/Regulations

Railway applications

Electronic equipment used on rolling stock	following to DIN EN 50155
Fire protection on railway vehicles	following to DIN EN 45545-2
Contact holder	Thermoplastic HL3 according to R22 EN 45545-2
Sealings	Elastomer
Shock and vibration	DIN EN 50155:2018-05, DIN EN 61373:2011-04 Class 1 Category B
Salt spray	DIN EN 50155:2018-05, (DIN EN 60068-2-11:2000-02/ 48h test KA)

Classifications

ETIM 7.0	EC002637
ETIM 8.0	EC002637
ETIM 9.0	EC002637



U | Contact

Data sheet

**PC board jack M12, D-coded, 4-pole, IP67,
rear mounting**

Page 4/5

P/N

MMT371A115


EAN 4251394621999

2023/07/04


Version: J

Illustrations

Dimensional drawing

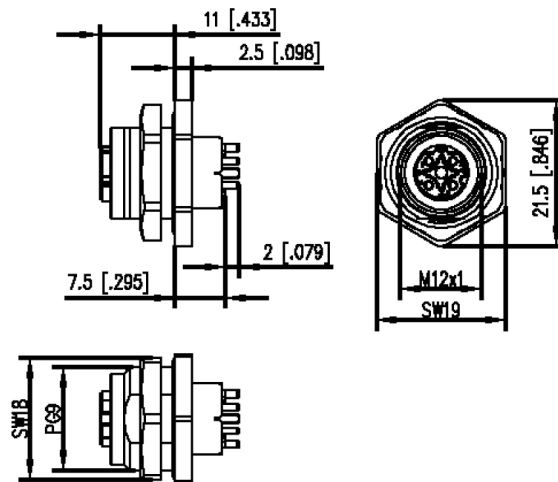

Drill pattern

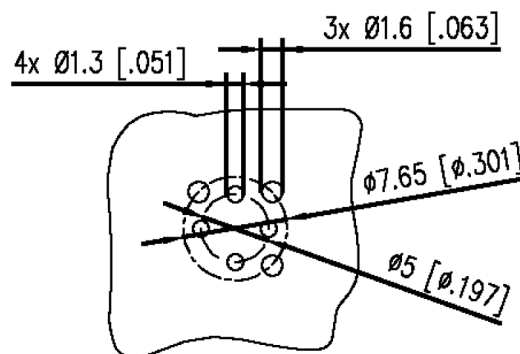

U | Contact

Data sheet

PC board jack M12, D-coded, 4-pole, IP67,
rear mounting

Page 5/5

P/N

MMT371A115

EAN 4251394621999

2023/07/04

Version: J

Illustrations

Cut-out

