

Data sheet

PC board jack M12, D-coded, 4-pole, IP67,
in individual parts


Page 1/5

P/N
MMT361A115-0001
EAN 4251394621951
2023/07/04
Version: H


Illustrations



Dimensional drawing

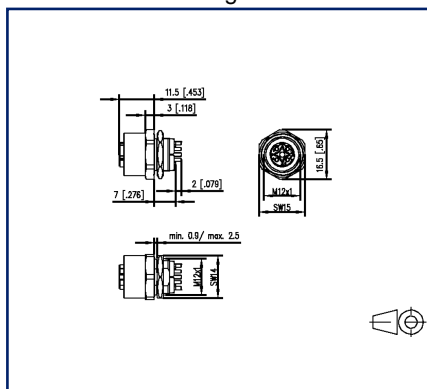

Drill pattern

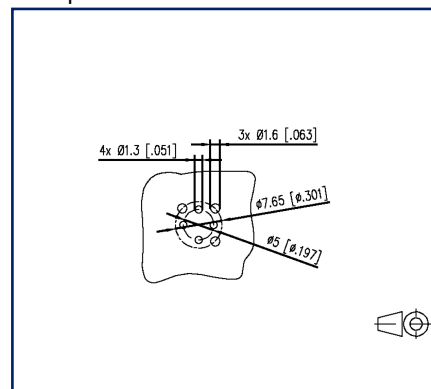

See enlarged drawings at the end of document

Product specification

- PC board jack M12
- Cat.5
- 4-pole, D-coded according to IEC 61076-02-101
- for 100 MBit Fast Ethernet (IEEE 802.3an)
- THR solderable
- Top entry
- Contact carriers green
- IP67 when plugged in
- in individual parts
- suitable for applications in the railway industry according to data sheet

Data sheet

Page 2/5

PC board jack M12, D-coded, 4-pole, IP67, in individual parts

P/N

MMT361A115-0001

EAN 4251394621951

2023/07/04

Version: H

Technical Data

General Data

Dimensions

Dimension (D x H)	Ø 16.5 mm x 20.5 mm
Dimension (D x H)	0.65 in. x 0.807 in.
Ports	Single port
Coding	D-coded

Electrical characteristics

Rated voltage	250 V
Current carrying capacity at 40 °C	4 A
Insulation resistance	min. 100 MOhm
Overvoltage category	II
Degree of pollution	2

Mechanical data

Material

Material - Housing	CuZnPb
Material - Contact	CuZnPb
Contact surface	Ni + Au
Shield material	CuSn
Material - Insulating body	PA UL94 V0
Color	metallike
Life - Number of mating cycles	>= 100
Tightening torque - Plug	0,6 - 1 Nm
Tightening torque - Jack mounting	3 Nm +/- 0,5 Nm
Protection category	IP67 when plugged in

Climatic properties

Temperature - Operating °C	-40 °C - 85 °C
Temperature - Operating °F	-40 °F - 185 °F



U | Contact

Data sheet

Page 3/5

**PC board jack M12, D-coded, 4-pole, IP67,
in individual parts**

P/N

MMT361A115-0001

EAN 4251394621951

2023/07/04

Version: H

Technical Data

Approvals

Approval mark UL	pending
------------------	---------

Packaging

Type of packaging	10 pc(s) / blister packaging
-------------------	------------------------------

Standards/Regulations

Railway applications

Electronic equipment used on rolling stock	following to DIN EN 50155
--	---------------------------

Fire protection on railway vehicles	following to DIN EN 45545-2
-------------------------------------	-----------------------------

Classifications

ETIM 7.0	EC002637
----------	----------

ETIM 8.0	EC002637
----------	----------

ETIM 9.0	EC002637
----------	----------

U | Contact

Data sheet

**PC board jack M12, D-coded, 4-pole, IP67,
in individual parts**

Page 4/5

P/N

MMT361A115-0001


EAN 4251394621951

2023/07/04


Version: H

Illustrations

Dimensional drawing

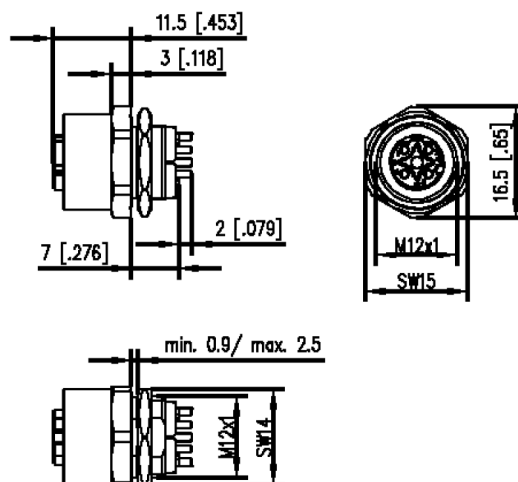

Drill pattern

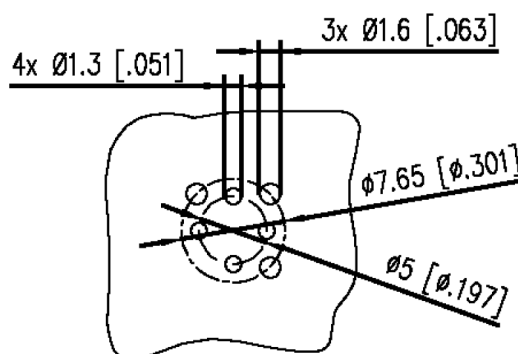

U | Contact

Data sheet

**PC board jack M12, D-coded, 4-pole, IP67,
in individual parts**

Page 5/5

P/N

MMT361A115-0001

EAN 4251394621951

2023/07/04

Version: H

Illustrations

Cut-out

