

Data sheet

PC board jack M12, D-coded, 4-pole, IP67, front mounting

Page 1/5

P/N

MMW360A1A1

EAN 4250184143116


2023/07/04

Version: F


Illustrations



Dimensional drawing

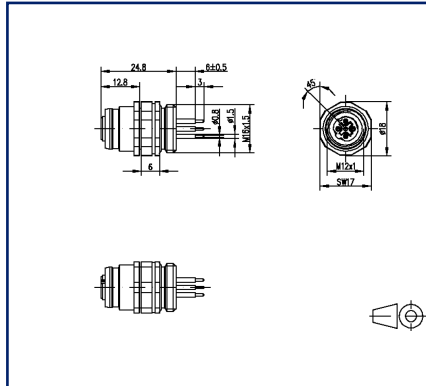

Drill pattern

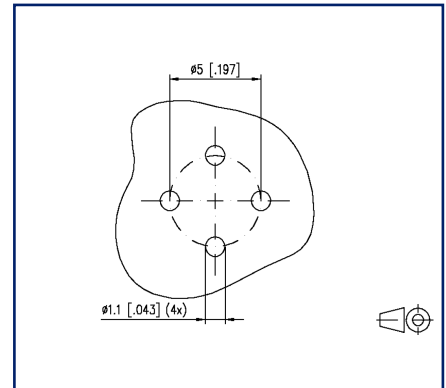

See enlarged drawings at the end of document

Product specification

- PC board jack M12
- 4-pole, D-coded according to IEC 61076-02-101
- THR solderable
- Front mounting
- Contact carriers green
- IP67 when plugged in
- suitable for applications in the railway industry

PC board jack M12, D-coded, 4-pole, IP67, front mounting

P/N
MMW360A1A1
EAN 4250184143116
2023/07/04
Version: F

Technical Data

General Data

Dimensions

Dimension (D x H)	Ø 18 mm x 33.8 mm
Dimension (D x H)	0.709 in. x 1.331 in.
Ports	Single port
Coding	D-coded

Electrical characteristics

Rated voltage	250 V
Current carrying capacity at 40 °C	4 A
Insulation resistance	min. 100 MOhm

Mechanical data

Material

Material - Housing	CuZnPb
Material - Contact	CuZnPb
Contact surface	Ni + Au
Shield material	CuSn
Material - Insulating body	PA UL94 V0
Color	metallike
Life - Number of mating cycles	>= 100
Protection category	IP 67

Climatic properties

Temperature - Operating °C	-40 °C - 90 °C
Temperature - Operating °F	-40 °F - 194 °F

Approvals

Approval mark UL	pending
------------------	---------

Standards/Regulations

Railway applications

Electronic equipment used on rolling stock	following to DIN EN 50155
Fire protection on railway vehicles	following to DIN EN 45545-2



U | Contact

Data sheet

Page 3/5

**PC board jack M12, D-coded, 4-pole, IP67,
front mounting**

P/N

MMW360A1A1

EAN 4250184143116

2023/07/04

Version: F

Technical Data

Classifications

ETIM 7.0	EC002637
ETIM 8.0	EC002637
ETIM 9.0	EC002637



U | Contact

Data sheet

Page 4/5

**PC board jack M12, D-coded, 4-pole, IP67,
front mounting**

P/N

MMW360A1A1

EAN 4250184143116

2023/07/04

Version: F

Accessories

P/N	Designation
700701	M12 screw plug for jacks IP54

Illustrations

Dimensional drawing

