

P | Cabling

Data sheet

Keystone module frame 3RU, 7HP 6 port stainless steel unequipped

Page 1/6

P/N

130B20E2E-E

EAN 4250184149569


2023/04/14

Version: O

Illustrations



Dimensional drawing

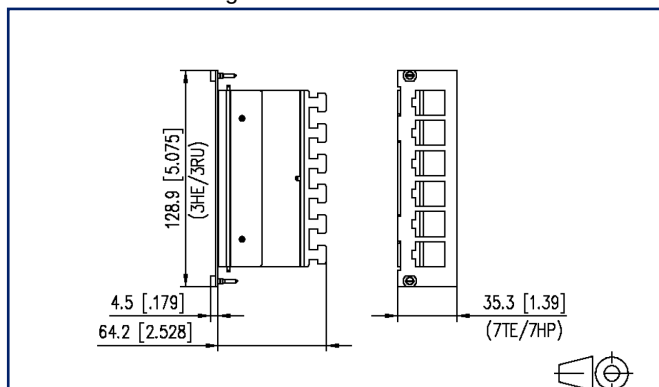

See enlarged drawings at the end of document

Product specification

- stainless steel module frame for 6 individual modules in Keystone design
- strain relief at the module
- 3RU 7HP module frame with very short dimensions
- mounts in OpDAT REGpro, OpDAT REGpro24, OpDAT CM or 3HP module frame
- additional strain relief possible by cable tie
- grounding possible by flat plug



P | Cabling

Data sheet

Page 2/6

Keystone module frame 3RU, 7HP 6 port stainless steel unequipped

P/N

130B20E2E-E

EAN 4250184149569

2023/04/14

Version: O

Technical Data

General Data

Fields of application	office areas
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	patch panel
Color	stainless steel
Dimensions	
Dimension (L x W x H)	64.2 mm x 128.9 mm x 35.3 mm
Dimension (L x W x H)	2.528 in. x 5.075 in. x 1.39 in.
Height unit	3RU
Horizontal pitch	7HP

Connections/interfaces

Number of ports interface 1	6
Number of equipped ports interface 1	0
Number of ports interface 2	6
Number of ports interface 2 equipped	0
Ground connection	flat plug

Mechanical data

Cut-out	Keystone
strain relief	attached to module

Materials and material properties

Material - Module support	stainless steel
Halogen free	yes
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C



P | Cabling

Data sheet

Page 3/6

Keystone module frame 3RU, 7HP 6 port stainless steel unequipped

P/N

130B20E2E-E

EAN 4250184149569

2023/04/14

Version: O

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Operating °F -40 °F - 158 °F

Classifications

ETIM 5.0 EC001128

ETIM 6.0 EC001128

ETIM 7.0 EC001128

ETIM 8.0 EC001128

ETIM 9.0 EC001128

Packing details

Type of packaging 1 pc(s) / plastic bag

Packaging unit - Weight (gram) 563 g

Packaging unit - Weight (pound) 1.24 lb

Packaging dimension 300 mm x 200 mm x 50 mm

Packaging dimension 11.811 in. x 7.874 in. x 1.969 in.

P | Cabling

Data sheet

Page 4/6

Keystone module frame 3RU, 7HP 6 port stainless steel unequipped

P/N

130B20E2E-E

EAN 4250184149569

2023/04/14

Version: O

Accessories

P/N	Designation
130898-0003KI	Keystone BLIND module light gray
130898-0029KI	Keystone BLIND module black
130898-0103KI	COAX modul F jack / F jack, Keystone
130898-0203KI	COAX modul IEC jack / F jack, Keystone
130898-0303KI	COAX modul IEC plug / F jack, Keystone
130910KI	E-DAT modul Cat.6 _A K jack - Keystone style
130910KI-79	E-DAT modul Cat.6 _A K jack - Keystone style
130910KZ	E-DAT modul Cat.6 _A K jack - Keystone style (12 pcs)
1309A0-I	E-DAT modul coupler 8(8) 180° class E _A
130A08-I-B1	UTP modul Cat.5e white
130A10-29-I-B1	UTP modul 8(8) Cat.6 black
130A10-I-B1	UTP modul 8(8) Cat.6 white
130A11-29KI	UTP modul 8(8) Cat.6 _A Keystone black
130A11KI	UTP modul 8(8) Cat.6 _A Keystone white
130B21-25-E	25Gmodul - Keystone
130B21-25-Z	25Gmodul - Keystone style (12 pcs)
130B21-E	C6 _A modul K 180° jack - keystone style
130B21-Z	C6 _A modul K 180° jack - Keystone style (12 pcs)
15091071-I	OpDAT modul LC-Duplex OS2
15091072-I	OpDAT modul LC-Duplex OM3
15091075-I	OpDAT modul LC-Duplex OM4
15091076-I	OpDAT modul LC-Duplex APC OS2
1509107B-I	OpDAT modul LC-Duplex OM2

P | Cabling

Data sheet

Page 5/6

Keystone module frame 3RU, 7HP 6 port stainless steel unequipped

P/N

130B20E2E-E

EAN 4250184149569

2023/04/14

Version: O

Accessories from

P/N	Designation
130808-01-E	Module frame 3RU 10-inch
15024A10-24-E	OpDAT REGpro24 housing without splice tray
15024A10-E	OpDAT REGpro housing without splice tray
15024A10S-E	OpDAT REGpro housing with splice tray and crimp splice holder
15024B10-E	OpDAT REG Splice Distributor for pre-terminated cables
15024B10S-E	OpDAT REG Splice Distributor for crimp splice holder
15024B10S-S	OpDAT REG Splice Distributor for shrink splice holder



P | Cabling

Data sheet

Page 6/6

Keystone module frame 3RU, 7HP 6 port stainless steel unequipped

P/N

130B20E2E-E

EAN 4250184149569

2023/04/14

Version: O

Illustrations

Dimensional drawing

