

P | Cabling

Data sheet

OpDAT PA patch panel for 24xST-Simplex

Page 1/5

P/N

1502200100-E

EAN 4250184108740


2023/04/14

Version: T

Illustrations



Dimensional drawing

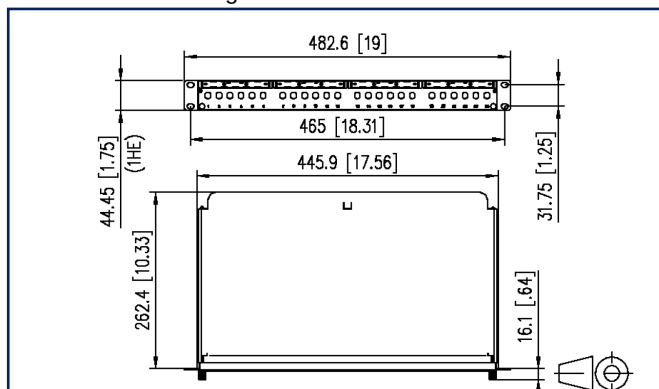

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover
- splice tray can be removed completely for better mounting (pull-out stop)
- light aluminum construction
- unequipped
- variable cable entry (straight / inclined) from both sides possible
- cable support by means of cable ties or cable gland (accessories)
- cable diameter from 3 to 20 mm
- strain relief for central element / Kevlar
- cable management by means of freely positionable guide elements
- snap-on cover for easy access during service work
- label window for enclosed identification labels

Variants

24x LC-D

12x SC-D

24x ST

recesses for

LC-D, SC simplex, E2000 simplex

SC-D, LC-Q

ST



P | Cabling

Data sheet

Page 2/5

OpDAT PA patch panel for 24xST-Simplex

P/N

1502200100-E

EAN 4250184108740

2023/04/14

Version: T

Technical Data

General Data	
Fields of application	office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	patch panel
Mounting style	1RU
Color	anodized alu.
Dimensions	
Dimension (L x W x H)	262.4 mm x 482.6 mm x 44.45 mm
Dimension (L x W x H)	10.331 in. x 19 in. x 1.75 in.
Inches	19 inches
Height unit	1RU
Labeling option	label window with identification label + printed numbers
Connections/interfaces	
Connector technology interface 1	ST
Number of ports interface 1	24
Number of equipped ports interface 1	0
Connector technology interface 2	ST
Number of ports interface 2	24
Number of ports interface 2 equipped	0
Cable sheath diameter (min. - max.)	
Cable sheath diameter	3 mm - 20.00
Cable sheath diameter	0.118 in. - 0.787
Cable access/outlet	straight or inclined, on the rear, from the left and right
Mechanical data	
Cut-out	ST
strain relief	cable tie

P | Cabling

Data sheet

Page 3/5

OpDAT PA patch panel for 24xST-Simplex

P/N

1502200100-E

EAN 4250184108740

2023/04/14

Version: T

Technical Data

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	Al (Aluminium)
Material - Front cover finish	anodized
Material - Cover	Al (Aluminium)
Halogen free	yes
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC002006
ETIM 8.0	EC002006
ETIM 9.0	EC002006

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	2190 g
Packaging unit - Weight (pound)	4.83 lb
Packaging dimension	523 mm x 361 mm x 45 mm
Packaging dimension	20.591 in. x 14.213 in. x 1.772 in.



P | Cabling

Data sheet

Page 4/5

OpDAT PA patch panel for 24xST-Simplex

P/N

1502200100-E

EAN 4250184108740

2023/04/14

Version: T

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7.0 to 12.0 mm)
150811M25-E	Cable gland M25 (Clamping range 10.0 to 16.0 mm)
15090001-100	OpDAT Simplex adapter ST SM+MM - 100 pieces
15090001-I	OpDAT Simplex adapter ST SM+MM
1509010000-E	OpDAT splice tray for 12 splices, unequipped
899011-01	Label sheet for Modul patch panels / REG
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels

P | Cabling

Data sheet

OpDAT PA patch panel for 24xST-Simplex

Page 5/5

P/N

1502200100-E

EAN 4250184108740

2023/04/14

Version: T

Illustrations

Dimensional drawing

