

P | Cabling

Data sheet

OpDAT REGpro front cover 12xE2000-S APC OS2

Page 1/5

P/N


15024A5912-E

EAN 4250184130413


2023/07/11

Version: AE

Illustrations

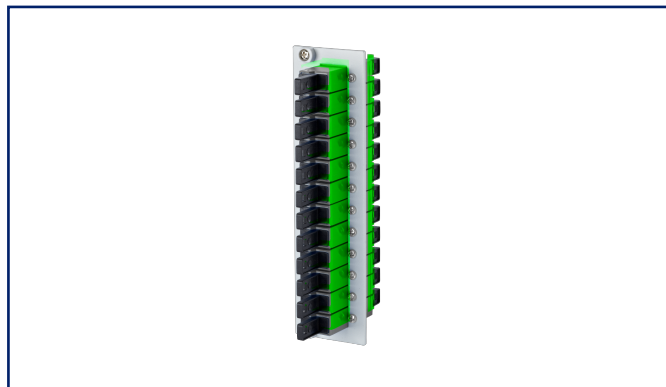

Dimensional drawing

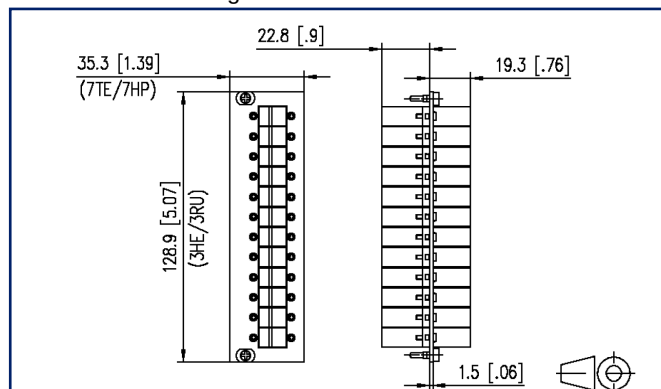

See enlarged drawings at the end of document

Product specification

- front plate 3RU/7HP with 12 E2000 adapters
- slotted ceramics sleeve for single mode applications
- suitable for mounting in OpDAT REG pro and OpDAT REG S
- gray, powder-coated steel sheet
- variants: equipped with 12 E2000 adapters, each in blue (OS2) or E2000 APC adapters, each in green (OS2)



P | Cabling

Data sheet

Page 2/5

OpDAT REGpro front cover 12xE2000-S APC OS2

P/N

15024A5912-E

EAN 4250184130413

2023/07/11

Version: AE

Technical Data

General Data

Fields of application	structured building cabling office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	front plate
Mounting style	3RU/7HP
Transmission technology	Fiber optic
Color	green
Dimensions	
Dimension (L x W x H)	43.6 mm x 128.9 mm x 35.3 mm
Dimension (L x W x H)	1.717 in. x 5.075 in. x 1.39 in.
Height unit	3RU
Horizontal pitch	7HP
Mode type of the fiber	Singlemode

Connections/interfaces

Connector technology interface 1	E2000-S Couplers
Connector technology interface 2	E2000-S Couplers
Number of ports interface 1	12
Number of ports interface 2	12
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12
Number of ports with dust protection interface 2	12

Mechanical data

Cut-out	SC, LC-D, E2000
Connector type	simplex
Life - Number of mating cycles	min. 1000



P | Cabling

Data sheet

Page 3/5

OpDAT REGpro front cover 12xE2000-S APC OS2

P/N

15024A5912-E

EAN 4250184130413

2023/07/11

Version: AE

Technical Data

Materials and material properties

Material - Mounting plate	steel
Material - Mounting plate finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
Halogen free	yes
RoHS	compliant

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC001130
ETIM 8.0	EC001130
ETIM 9.0	EC001130

Packing details

Type of packaging	1 pc(s) / plastic bag
Packaging dimension	160 mm x 100 mm x 380 mm
Packaging dimension	6.299 in. x 3.937 in. x 14.961 in.



P | Cabling

Data sheet

Page 4/5

OpDAT REGpro front cover 12xE2000-S APC OS2

P/N

15024A5912-E

EAN 4250184130413

2023/07/11

Version: AE

Accessories from

P/N	Designation
15024A10-24-E	OpDAT REGpro24 housing without splice tray
15024A10-E	OpDAT REGpro housing without splice tray
15024A10S-E	OpDAT REGpro housing with splice tray and crimp splice holder
15024B10-E	OpDAT REG Splice Distributor for pre-terminated cables
15024B10S-E	OpDAT REG Splice Distributor for crimp splice holder
15024B10S-S	OpDAT REG Splice Distributor for shrink splice holder



P | Cabling

Data sheet

Page 5/5

OpDAT REGpro front cover 12xE2000-S APC OS2

P/N

15024A5912-E

EAN 4250184130413

2023/07/11

Version: AE

Illustrations

Dimensional drawing

