



Data sheet

OpDAT REGpro front cover 6xLC-Q OM4

Illustrations

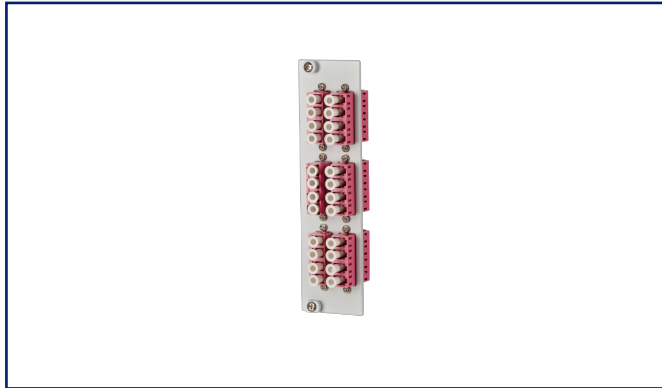

Dimensional drawing

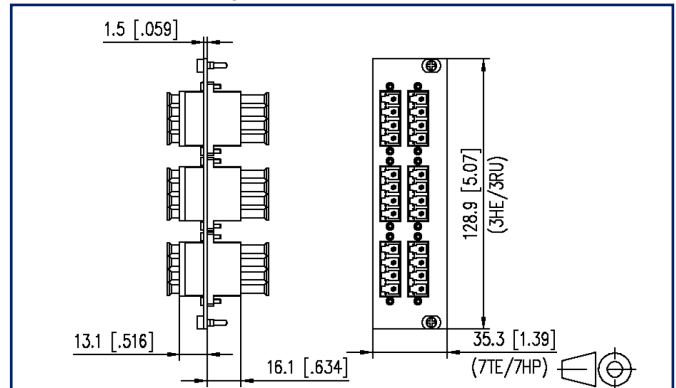

See enlarged drawings at the end of document

Product specification

- front plate 3RU/7HP LC-Q adapters
- slotted ceramics sleeve for single mode and multi mode applications
- suitable for mounting in OpDAT REGpro24 and OpDAT REG S
- gray, powder-coated steel sheet
- variants: equipped with 3 or 6 LC-Q adapters, each in blue (OS2), violet (OM4), aqua (OM3) or LC-Q APC adapters, each in green (OS2)

P | Cabling

Data sheet

Page 2/5

OpDAT REGpro front cover 6xLC-Q OM4

P/N

15024A7906-E

EAN 4250184165026

2023/04/19

Version: AC

Technical Data

General Data

Fields of application	structured building cabling office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	front plate
Mounting style	3RU/7HP
Transmission technology	Fiber optic
Color	violet
Dimensions	
Dimension (L x W x H)	30.7 mm x 128.9 mm x 35.3 mm
Dimension (L x W x H)	1.209 in. x 5.075 in. x 1.39 in.
Height unit	3RU
Horizontal pitch	7HP
Mode type of the fiber	Multimode

Connections/interfaces

Connector technology interface 1	LC-Q Couplers
Connector technology interface 2	LC-Q Couplers
Number of ports interface 1	6
Number of ports interface 2	6
Number of equipped ports interface 1	6
Number of ports interface 2 equipped	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6

Mechanical data

Cut-out	SC-D, LC-Q, ST-D
Life - Number of mating cycles	min. 1000

P | Cabling

Data sheet

Page 3/5

OpDAT REGpro front cover 6xLC-Q OM4

P/N

15024A7906-E

EAN 4250184165026

2023/04/19

Version: AC

Technical Data

Materials and material properties

Material - Mounting plate	steel
Material - Mounting plate finish	powder-coated
Material - Sleeve	CuSnP
Material - Coupler housing	Plastics
Halogen free	yes
RoHS	compliant

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC001130
ETIM 8.0	EC001130
ETIM 9.0	EC001130

Packing details

Type of packaging	1 pc(s) / plastic bag
Packaging unit - Weight (gram)	168 g
Packaging unit - Weight (pound)	0.37 lb
Packaging dimension	160 mm x 100 mm x 380 mm
Packaging dimension	6.299 in. x 3.937 in. x 14.961 in.

P | Cabling

Data sheet

Page 4/5

OpDAT REGpro front cover 6xLC-Q OM4

P/N

15024A7906-E

EAN 4250184165026

2023/04/19

Version: AC

Accessories from

P/N	Designation
15024A10-24-E	OpDAT REGpro24 housing without splice tray

© 2023 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!



P | Cabling

Data sheet

OpDAT REGpro front cover 6xLC-Q OM4

Page 5/5

P/N

15024A7906-E

EAN 4250184165026

2023/04/19

Version: AC

Illustrations

Dimensional drawing

