

## Data sheet

### OpDAT slide patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

Page 1/5

P/N

150260B200-E

EAN 4250184170815


2023/04/14

Version: S

## Illustrations



Dimensional drawing

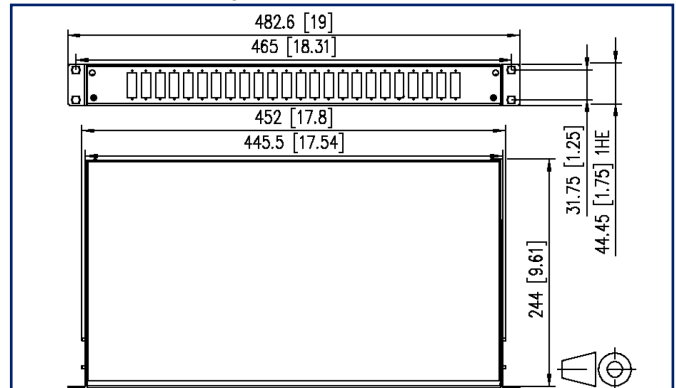

See enlarged drawings at the end of document

## Product specification

- 19 inch 1RU fiber optic patch panel with pull-out splice tray / front cover (gray or black)
- splice tray can be tilted and removed completely for better mounting
- unequipped
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)

variants:	matching recesses
24x LC-D	LC-D, SC-S, E2000-S
24x SC-D	SC-D, LC-Q, ST-D, SC-D/ST-D
24x E2000-D	E2000-D



# P | Cabling

Data sheet

Page 2/5

## OpDAT slide patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

P/N

150260B200-E

EAN 4250184170815

2023/04/14

Version: S

### Technical Data

#### General Data

Fields of application	office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	patch panel
Mounting style	1RU
Color	metallike
Dimensions	
Dimension (L x W x H)	244 mm x 482.6 mm x 44.45 mm
Dimension (L x W x H)	9.606 in. x 19 in. x 1.75 in.
Inches	19 inches
Height unit	1RU
Installation depth	240 mm
Installation depth	9.449 in.
Labeling option	printed numbers

#### Connections/interfaces

Number of ports interface 1	24
Number of equipped ports interface 1	0
Number of ports interface 2	24
Number of ports interface 2 equipped	0
Cable access/outlet	several possibilities for cable entry on the back

#### Mechanical data

Cut-out	SC-D, LC-Q, ST-D
---------	------------------

#### Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Halogen free	yes
RoHS	compliant

# P | Cabling

Data sheet

Page 3/5

## OpDAT slide patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

P/N

150260B200-E

EAN 4250184170815

2023/04/14

Version: S

### Technical Data

#### Classifications

ETIM 7.0	EC002006
ETIM 8.0	EC002006
ETIM 9.0	EC002006

#### Packing details

Type of packaging	1 pc(s) / box
Packaging dimension	580 mm x 405 mm x 70 mm
Packaging dimension	22.835 in. x 15.945 in. x 2.756 in.



# P | Cabling

Data sheet

Page 4/5

## OpDAT slide patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

P/N

150260B200-E

EAN 4250184170815

2023/04/14

Version: S

### Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
15081106-E	OpDAT mounting plate VIK
150811M20-E	Cable gland M20 (Clamping range 7.0 to 12.0 mm)
150811M25-E	Cable gland M25 (Clamping range 10.0 to 16.0 mm)
15090052-I	OpDAT adapter SC-Duplex OM2 (metal)
150900B2-I	OpDAT adapter SC-Duplex OM2
150900BA-I	OpDAT adapter SC-Duplex OM3
150900BB-I	OpDAT adapter SC-Duplex OM4
150900D1-I	OpDAT Duplex-adapter ST SM+MM
150900D2-I	OpDAT adapter SC-Duplex OS2 (metal)
150900D3-I	OpDAT adapter ST/SC-Duplex OS2
150900D4-I	OpDAT SC-D APC adapter OS2 (metallike+green)
150900E2-I	OpDAT adapter SC-Duplex OS2
150900F2-I	OpDAT adapter SC-Duplex APC OS2

# P | Cabling

Data sheet

## OpDAT slide patch panel for 24xSC-Duplex/LC-Quad/ST-Duplex

Page 5/5

P/N

150260B200-E


EAN 4250184170815

2023/04/14

Version: S

### Illustrations

Dimensional drawing

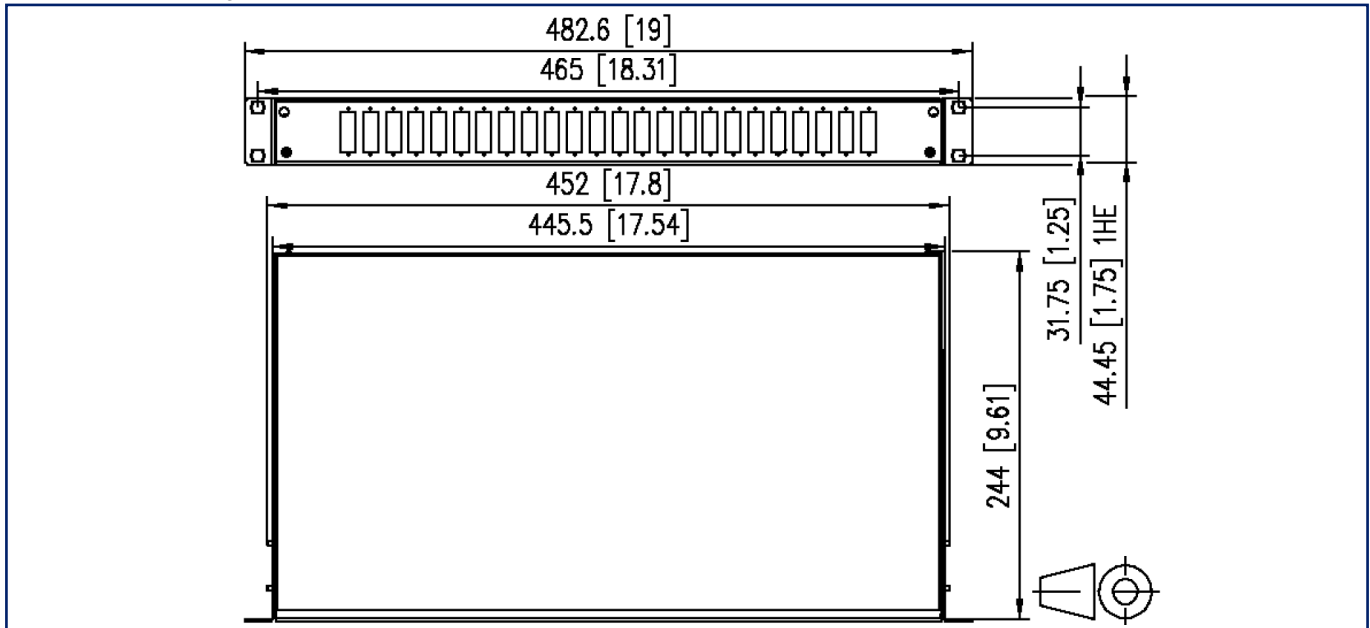

© 2023 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

