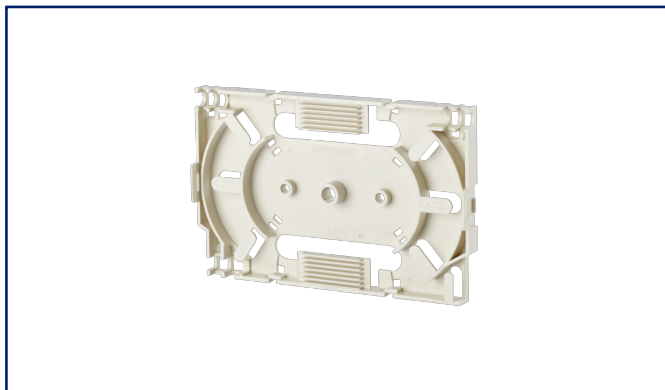


Data sheet
OpDAT splice tray

Page 1/2

P/N
1509010302-E
EAN 4250184109624
2023/04/04
Version: C**Illustrations**

See enlarged drawings at the end of document

Product specification

- fiber optic connection splice box for safe storage of fusion splices in cable duct, false floor, etc.
- suitable for consolidation points, can be stacked using accessory
- for up to 4 cables with outer diameters of max. 7 mm
- basic plate with 2 cable entries and 4 cable outlets
- fastening on flat surfaces, TH35 rail to DIN EN 60715, C rail or combi rail
- splice tray with integrated splice holder for 12 crimp splices for retrofitting
- storage tray and cover for retrofitting
- variants: complete, storage tray, splice tray, cover



P | Cabling

Data sheet OpDAT splice tray

Page 2/2

P/N
1509010302-E
EAN 4250184109624
2023/04/04
Version: C

Technical Data

General Data

Fields of application	Consolidation points
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	Splice tray
Mounting style	Accessories
Color	pearl white RAL 1013
Dimensions	
Dimension (L x W x H)	121 mm x 77 mm x 8 mm
Dimension (L x W x H)	4.764 in. x 3.031 in. x 0.315 in.

Materials and material properties

Material	Plastics
Halogen free	yes
RoHS	compliant

Classifications

ETIM 5.0	EC002066
ETIM 6.0	EC002066
ETIM 7.0	EC000762
ETIM 8.0	EC000762
ETIM 9.0	EC000762

Packing details

Type of packaging	1 pc(s) / plastic bag
Packaging unit - Weight (gram)	29 g
Packaging unit - Weight (pound)	0.06 lb
Packaging dimension	160 mm x 100 mm x 380 mm
Packaging dimension	6.299 in. x 3.937 in. x 14.961 in.