



Illustrations



Dimensional drawing

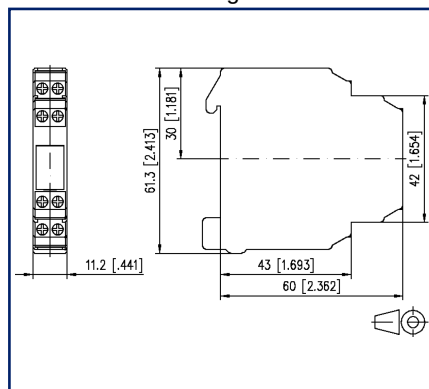

Wiring diagram

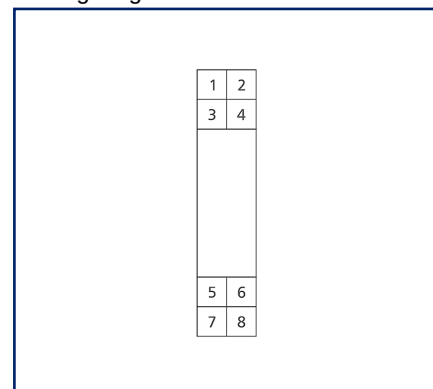

See enlarged drawings at the end of document

Product specification

The diode module is equipped with 7 diodes. The anodes of the diodes are all connected to each other. The module is used for failure indication systems (lamp tests).

- common anode
- Connection with screw-type terminals

Technical Data

Housing

Dimensions

Dimension (W x H x D)	11.2 mm x 61.3 mm x 60 mm
Dimension (W x H x D)	0.441 in. x 2.413 in. x 2.362 in.
Weight	20 g
Mounting style	Standard rail TH35
Mounting position	any
Apposition	without distance
Connection type	Screw type terminal blocks

Terminal blocks

Wire cross section solid	0.2 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section multi	0.25 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section with wire ferrule	0.25 mm ² - 2.5 mm ² / AWG 22-12
Screw torque (max.)	0.5 Nm
Stripping length (min.)	8 mm

Material

Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0

Protection category according to IEC 60529

Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20

Temperature range

Operating	
Temperature - Operating °C	-10 °C - 50 °C
Temperature - Operating °F	14 °F - 122 °F
Storage	
Temperature - Storage °C	-25 °C - 70 °C
Temperature - Storage °F	-13 °F - 158 °F

C | Logline

Data sheet
KD-M8/7A

Page 3/5

P/N
110640

EAN 4250184122814

2023/06/20

Version: B

Technical Data


Classifications

ETIM 7.0	EC002878
ETIM 8.0	EC002878
ETIM 9.0	EC002878




Illustrations

Dimensional drawing

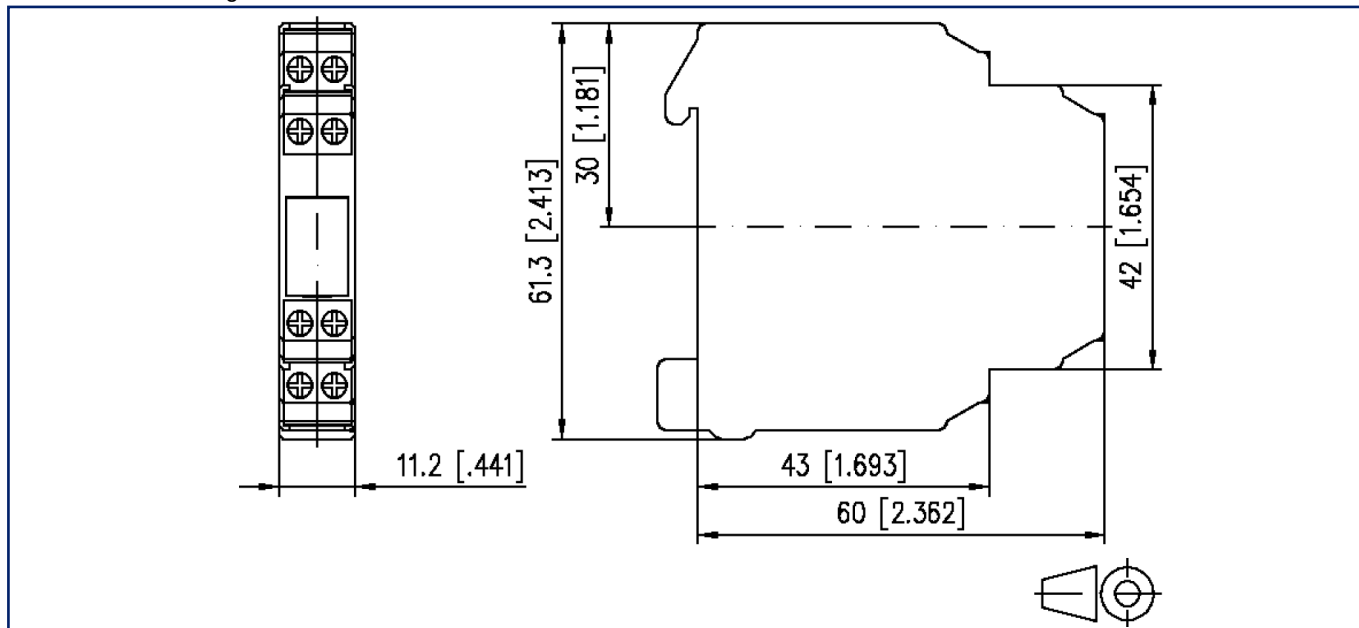

Wiring diagram

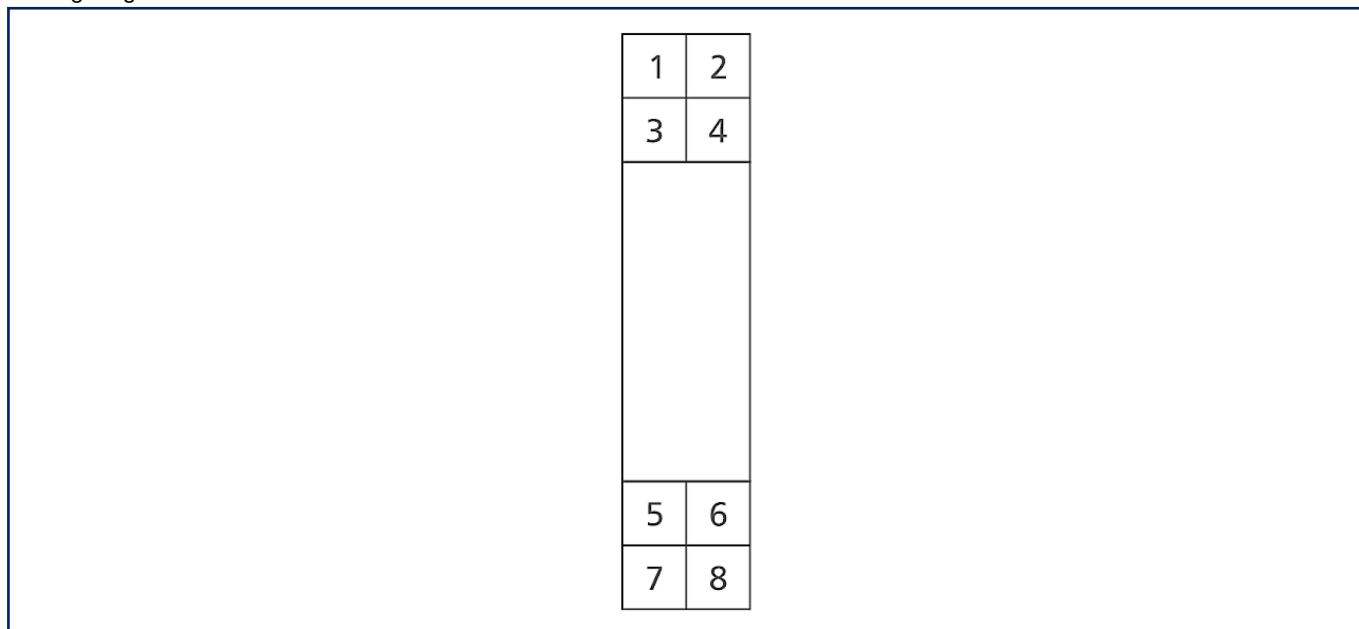

Illustrations

Circuit diagram

