

P | Cabling

Data sheet

Module frame 3RU, 7HP 6 port, aluminum, unequipped

Page 1/6

P/N

130B10E2-E

EAN 4251394628332


2023/04/14

Version: B

Illustrations



Dimensional drawing

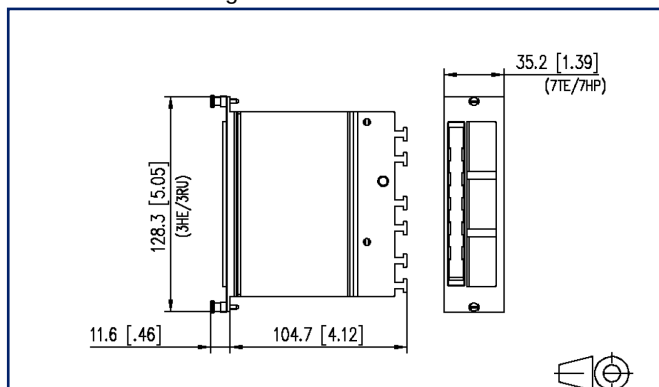

See enlarged drawings at the end of document

Product specification

- module frame for 6 individual modules
- 3RU module frame front made of silver anodized aluminum for mounting in 3RU assembly frame
- with label window for enclosed identification labels
- optional strain relief using cable ties
- grounding bolt M6 x 10 with nut and lock washer



P | Cabling

Data sheet

Page 2/6

Module frame 3RU, 7HP 6 port, aluminum, unequipped

P/N

130B10E2-E

EAN 4251394628332

2023/04/14

Version: B

Technical Data

General Data

Fields of application	office areas
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	patch panel
Color	anodized alu.
Dimensions	
Dimension (L x W x H)	104.7 mm x 128.3 mm x 35.2 mm
Dimension (L x W x H)	4.122 in. x 5.051 in. x 1.386 in.
Height unit	3RU
Horizontal pitch	7HP
Modularity	yes

Connections/interfaces

Number of ports interface 1	6
Number of equipped ports interface 1	0
Number of ports interface 2	6
Number of ports interface 2 equipped	0
Ground connection	flat plug

Mechanical data

Cut-out	module
strain relief	attached to module

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Subrack finish	silver anodized
Material - Cover	Al (Aluminium)
Material - Module support	stainless steel
Material - Label window	ABS, transparent
Halogen free	yes
RoHS	compliant



P | Cabling

Data sheet

Page 3/6

Module frame 3RU, 7HP 6 port, aluminum, unequipped

P/N

130B10E2-E

EAN 4251394628332

2023/04/14

Version: B

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C -40 °C - 70 °C

Temperature - Storage °F -40 °F - 158 °F

Temperature - Operating °C -40 °C - 70 °C

Temperature - Operating °F -40 °F - 158 °F

Classifications

ETIM 5.0 EC001128

ETIM 6.0 EC001128

ETIM 7.0 EC001128

ETIM 8.0 EC001128

ETIM 9.0 EC001128

Packing details

Type of packaging 1 pc(s) / plastic bag



P | Cabling

Data sheet

Page 4/6

Module frame 3RU, 7HP 6 port, aluminum, unequipped

P/N

130B10E2-E

EAN 4251394628332

2023/04/14

Version: B

Accessories

P/N	Designation
130864-03-E	COAX distributor 1RU
130922-00-E	6 port module frame 1RU
130922-03-E	E-DAT modul 6x8(8) for 1RU patch panel Cat.6 _A
860018-10-E	E-DAT 6x8 Modul Class E/Cat.6 Link
860018-11C-E	E-DAT C6 _A 6 port for 1RU inlet
860018-11-E	E-DAT C6 6x8 1RU Modul Cat.6
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels



P | Cabling

Data sheet

Page 5/6

Module frame 3RU, 7HP 6 port, aluminum, unequipped

P/N

130B10E2-E

EAN 4251394628332

2023/04/14

Version: B

Accessories from

P/N	Designation
130808-01-E	Module frame 3RU 10-inch

P | Cabling

Data sheet

Page 6/6

Module frame 3RU, 7HP 6 port, aluminum, unequipped

P/N

130B10E2-E

EAN 4251394628332

2023/04/14

Version: B

Illustrations

Dimensional drawing

