



## Data sheet

### OpDAT trunk cable OS2 1xMTP-F/1xMTP-F BO 12 fibres


## Illustrations

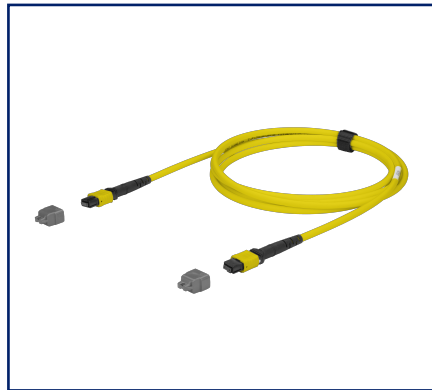

Dimensional drawing

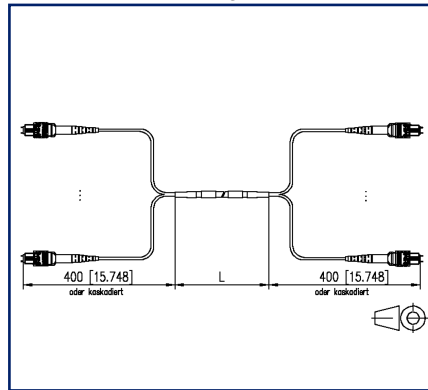

Principle diagram

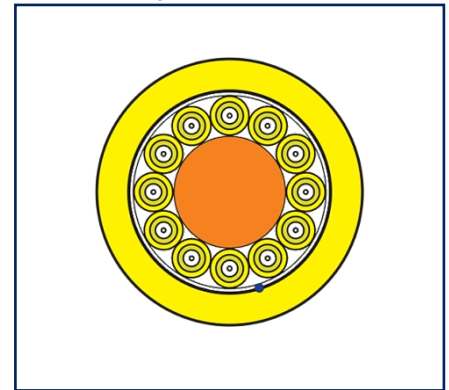

See enlarged drawings at the end of document

## Product specification

- Trunk cable with 12 SM fibres, assembled on both sides with one MPO/MTP® connector each.
- Available in the assignment variant polarity A or B.
- A insertion aid incl. fastening set is optionally available on one side.
- Breakout cable with aramid yarn, suitable for indoor applications.
- diameter 4.5 mm, UV-stabilized, flame retardant and halogen-free
- Fiber type: Singlemode fiber, E9/125 µm, OS2 (IEC 11801), IEC 60793-2-50 B.1.3 and B.6\_a, bend insensitive according to ITU-T G657.A1, compatible to ITU-T G.652.D.
- 100 % tested for insertion loss, return loss and end face geometry
- all trunk cables with serial number, barcode and measurement protocol
- all available variants can be created with the MTP® configurator
- MTP® is a registered trademark of US Conec Ltd., USA

# P | Cabling

Data sheet

Page 2/4

## OpDAT trunk cable OS2 1xMTP-F/1xMTP-F BO 12 fibres

P/N  
152PPTFTFXYYZZ

2023/08/22

Version: E

### Technical Data

#### General Data

Fields of application	data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	breakout cable
Transmission technology	Fiber optic
Color	yellow
Color coding fiber/ wire(s)	EIA/TIA 598
Dimensions	
Dimension - Interface 1 (L x W x H)	60.4 mm x 12.5 mm x 7.5 mm
Dimension - Interface 1 (L x W x H)	2.378 in. x 0.492 in. x 0.295 in.
Dimension - Interface 2 (L x W x H)	60.4 mm x 12.5 mm x 7.5 mm
Dimension - Interface 2 (L x W x H)	2.378 in. x 0.492 in. x 0.295 in.
Mode type of the fiber	Singlemode
Fiber class	OS2
Cable Type	Breakout
Number of cables/ buffered fibers	1
Number of fibres each cable/ wire	12
Shape	APC (Angled Physical Contact)
Fiber construction	9/125 µm

#### Connections/interfaces

Connector technology interface 1	MPO/MTP®
Connector technology interface 2	MPO/MTP®
Number of ports interface 1	4
Number of ports interface 2	4
Cable sheath diameter (min. - max.)	
Cable sheath diameter	4.5
Core-/ Fiber cladding diameter	3 mm
Primary coating diameter	125 µm

# P | Cabling

Data sheet

Page 3/4

## OpDAT trunk cable OS2 1xMTP-F/1xMTP-F BO 12 fibres

P/N  
152PPTFTFXYYZZ

2023/08/22

Version: E

### Technical Data

#### Optical characteristics

Insertion loss	max. 0,35 dB
Return loss	min. 60 dB

#### Mechanical data

strain relief	aramide fibres
Permanent tensile strength	1000 N
Maximum installation load	68 mm
Maximum operating bending radius	90 mm
Crush (compressive strength)	1200 N/100 mm
Fire load	4100 MJ/km

#### Materials and material properties

Material - Coupler housing	Plastics
Material - Cable jacket	LSHF
Flame retardancy	yes
Halogen free	yes
Metal-free	yes
UV-resistance	yes
Longitudinal water tightness	yes
RoHS	compliant

#### Standards/Regulations

Fibre optic connector interfaces	IEC 61754-7
----------------------------------	-------------

#### Classifications

ETIM 7.0	EC002700
ETIM 8.0	EC002700

#### Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------

# P | Cabling

Data sheet

Page 4/4

OpDAT trunk cable OS2 1xMTP-F/1xMTP-F BO 12 fibres


P/N  
152PPTFTFXYYZZ

2023/08/22

Version: E

## Illustrations

Dimensional drawing

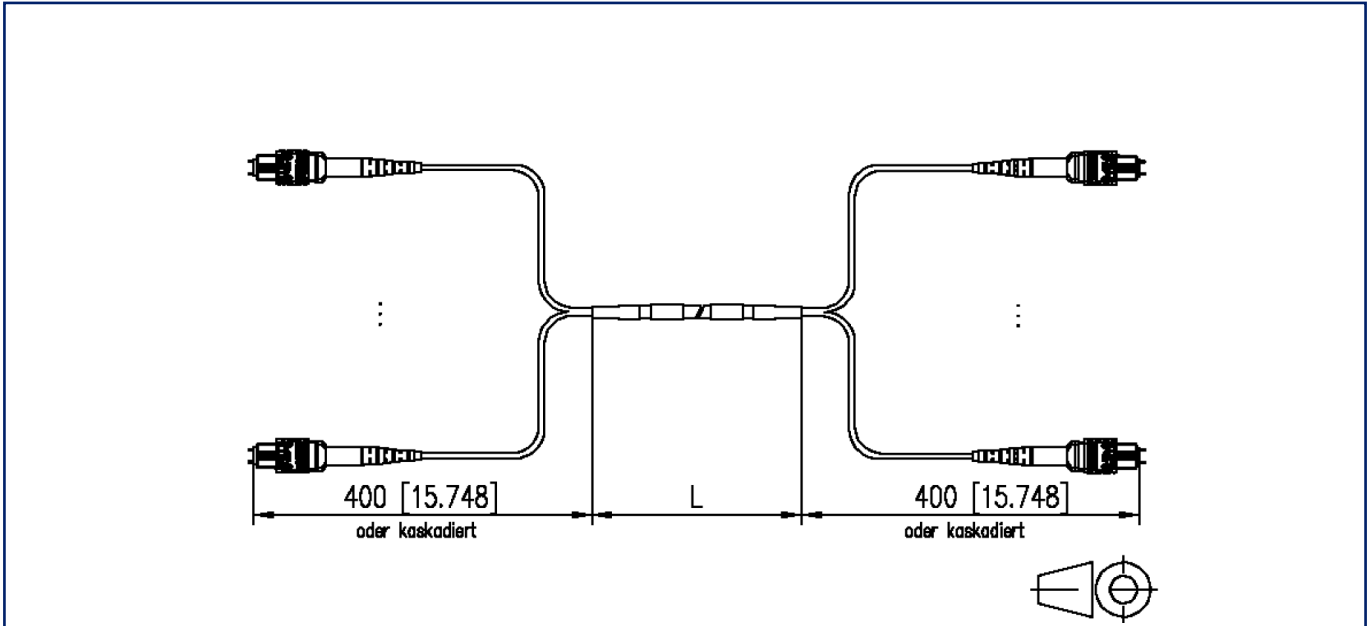

Principle diagram

