

P | Cabling

Data sheet

OpDAT cable fanout, 1xMTP-F/6xLC-D APC OS2


Page 1/5

P/N
152PPTFJAXYYZZ


2023/10/04

Version: F


Illustrations

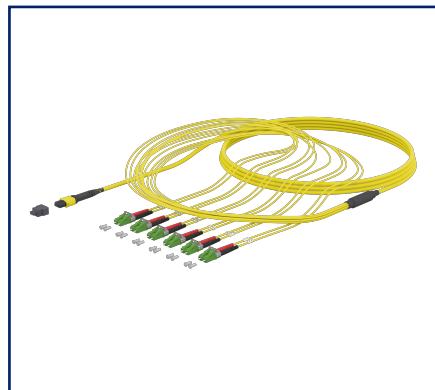

Dimensional drawing

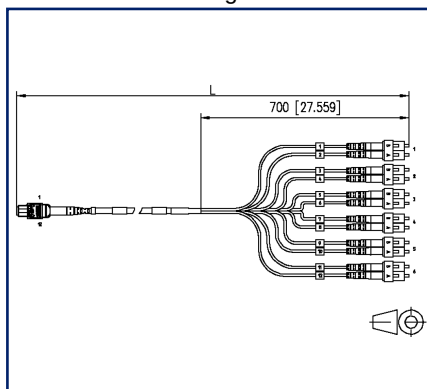

Principle diagram

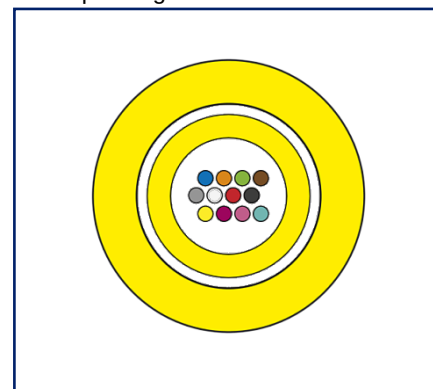

See enlarged drawings at the end of document

Product specification

- Cable fanout with 12 SM fibers, assembled with one MPO/MTP® connector and 6 LC-APC duplex connectors.
- Plastic divider as transition to fanout, consisting of individual cables with Ø 2 mm, length 0.7 m
- Female connector (without pins) as standard. Variants with male connector (with pins) are possible.
- Available in the assignment variant polarity A or B.
- A insertion aid incl. fastening set is optionally available on the MTP side.
- Suitable for transmissions of e.g. 100 Gbit/s (depending on transceiver technology).
- Cable with aramid yarn, suitable for indoor applications.
- Diameter available in Ø 3.0 mm and Ø 4.5 mm.
- UV stabilized, flame retardant and halogen free.
- Fiber type: Singlemode fiber, E9/125 µm, OS2 (IEC 11801), IEC 60793-2-50 B.1.3 and B.6_a, bend insensitive according to ITU-T G657.A1, compatible to ITU-T G.652.D.
- 100 % tested for insertion loss, return loss and end face geometry
- all fanouts with serial number, barcode and measurement protocol
- all available variants can be created with the MTP® configurator
- MTP® is a registered trademark of US Conec Ltd., USA



P | Cabling

Data sheet

Page 2/5

OpDAT cable fanout, 1xMTP-F/6xLC-D APC OS2

P/N
152PPTFJAXYYZZ

2023/10/04

Version: F

Technical Data

General Data	
Fields of application	interior data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	breakout cable
Transmission technology	Fiber optic
Color	yellow
Color coding fiber/ wire(s)	EIA/TIA 598
Dimensions	
Dimension - Interface 1 (L x W x H)	60.4 mm x 12.5 mm x 7.5 mm
Dimension - Interface 1 (L x W x H)	2.378 in. x 0.492 in. x 0.295 in.
Dimension - Interface 2 (L x W x H)	50.5 mm x 10.6 mm x 10.7 mm
Dimension - Interface 2 (L x W x H)	1.988 in. x 0.417 in. x 0.421 in.
Mode type of the fiber	Singlemode
Fiber class	OS2
Cable Type	MPO/MTP® cable
Number of cables/ buffered fibers	1
Number of fibres each cable/ wire	12
Shape	APC (Angled Physical Contact)
Fiber construction	9/125 µm
Connections/interfaces	
Connector technology interface 1	MPO/MTP® Pol.A
Connector technology interface 2	LC-D APC
Number of ports interface 2	6
Cable sheath diameter (min. - max.)	
Cable sheath diameter	4.5

P | Cabling

Data sheet

Page 3/5

OpDAT cable fanout, 1xMTP-F/6xLC-D APC OS2

P/N
152PPTFJAXYYZZ

2023/10/04

Version: F

Technical Data

Optical characteristics

Insertion loss	max. 0,35 dB
Return loss	min. 60 dB

Mechanical data

Permanent tensile strength	1000 N
Bending radius without load	min. 68 mm
Bending radius with load	min. 90 mm
Crush (compressive strength)	1200 N/100 mm

Materials and material properties

Material - Coupler housing	Plastics
Halogen free	yes
Metal-free	yes
UV-resistance	yes
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-25 °C - 70 °C
Temperature - Storage °F	-13 °F - 158 °F
Temperature - Operating °C	-10 °C - 70 °C
Temperature - Operating °F	14 °F - 158 °F
Temperature - Installation °C	-5 °C - 50 °C
Temperature - Installation °F	23 °F - 122 °F

Standards/Regulations

Fibre optic connector interfaces	IEC 61754-7
----------------------------------	-------------

Classifications

ETIM 7.0	EC002700
ETIM 8.0	EC002700
ETIM 9.0	EC002700



P | Cabling

Data sheet

Page 4/5

OpDAT cable fanout, 1xMTP-F/6xLC-D APC OS2

P/N

152PPTFJAXYYZZ

2023/10/04

Version: F

Technical Data

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------



P | Cabling

Data sheet

OpDAT cable fanout, 1xMTP-F/6xLC-D APC OS2

Page 5/5


P/N
152PPTFJAXYYZZ

2023/10/04

Version: F

Illustrations

Dimensional drawing

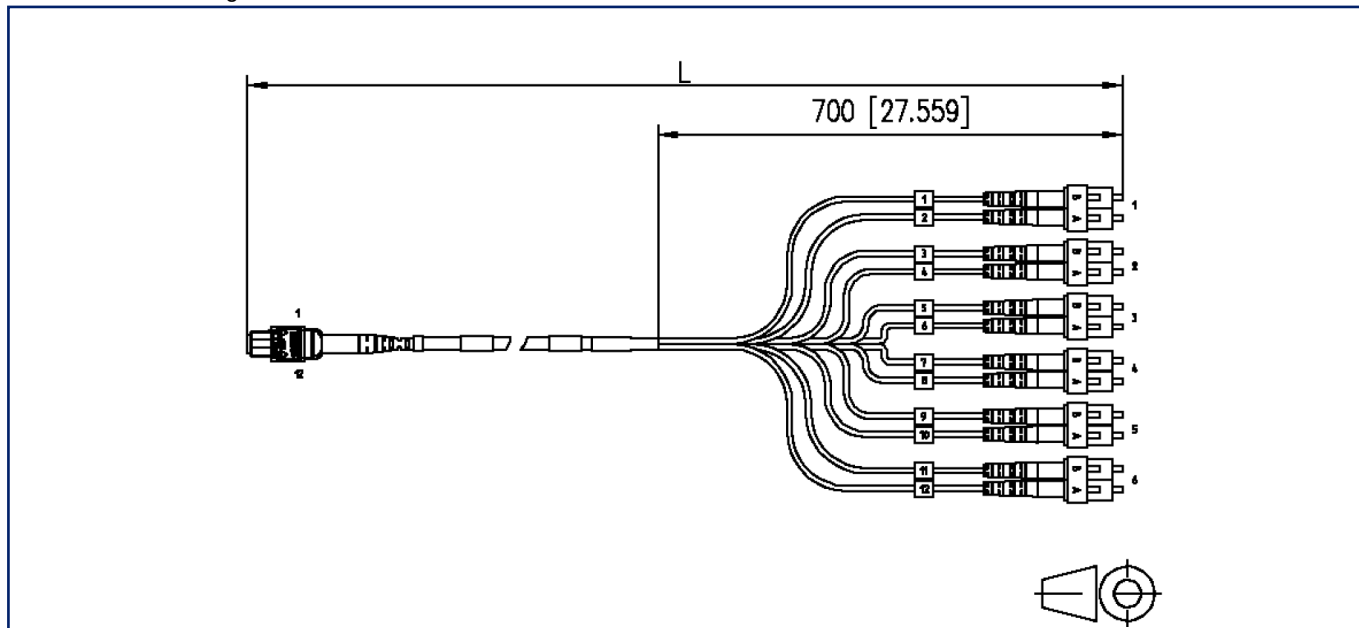

Principle diagram

