



Illustrations



Dimensional drawing

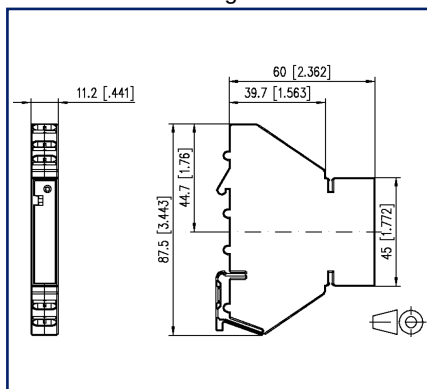

Wiring diagram

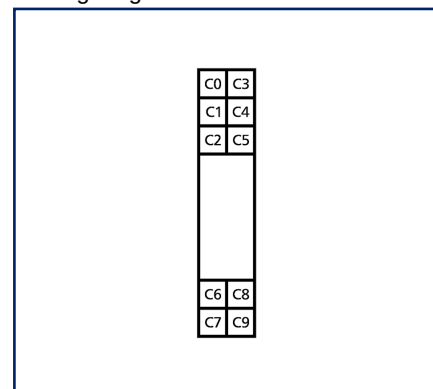

See enlarged drawings at the end of document

Product specification

The potential distributor distributes the potential of up to 10 lines on the top hat rail.

- Potential distributor
- Connection with spring-clamp terminal blocks (push-in)
- Test contacts for each terminal block

Data sheet

PV10 F10

Page 2/6

P/N

110720

EAN 4250184123187

2023/06/20

Version: B

Technical Data

Supply

Operating voltage	250 V AC/DC
total current	16 A AC/DC
Current per terminal (max.)	10 A AC/DC

Outputs

Contact material	AgSnO ₂
------------------	--------------------

Housing

Dimensions

Dimension (W x H x D)	11.2 mm x 87.5 mm x 60 mm
Dimension (W x H x D)	0.441 in. x 3.445 in. x 2.362 in.

Weight	30 g
--------	------

Mounting style	Standard rail TH35
----------------	--------------------

Mounting position	any
-------------------	-----

Apposition	without distance
------------	------------------

Connection type	Spring clamp terminal blocks
-----------------	------------------------------

Terminal blocks

Wire cross section solid	0.08 mm ² - 2.5 mm ² / AWG 28-14
Wire cross section multi	0.08 mm ² - 1.5 mm ² / AWG 28-16
Wire cross section with wire ferrule	0.08 mm ² - 2.5 mm ² / AWG 28-14
Stripping length (min.)	10 mm

Material

Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0

Protection category according to IEC 60529

Protection category - housing (acc. to IEC 60529)	IP20
---	------

Temperature range

Operating

Temperature - Operating °C	-20 °C - 55 °C
Temperature - Operating °F	-4 °F - 131 °F

Storage

Temperature - Storage °C	-25 °C - 70 °C
Temperature - Storage °F	-13 °F - 158 °F

Technical Data**Power loss**

Power loss (typical)	500 mW
----------------------	--------

Classifications

ETIM 6.0	EC000310
ETIM 7.0	EC001284
ETIM 8.0	EC001284
ETIM 9.0	EC001284



C | Logline

Data sheet
PV10 F10

Page 4/6

P/N
110720

EAN 4250184123187

2023/06/20

Version: B


Accessories

P/N	Designation
110729	Labeling plate




Illustrations

Dimensional drawing

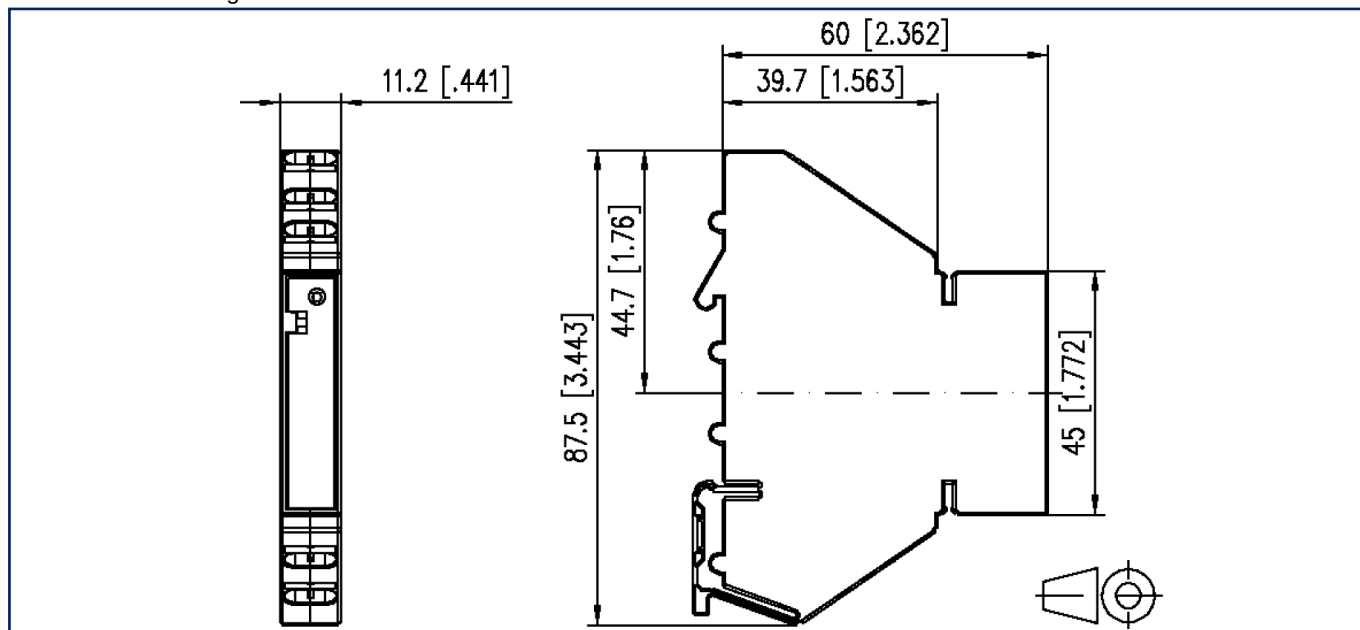

Wiring diagram

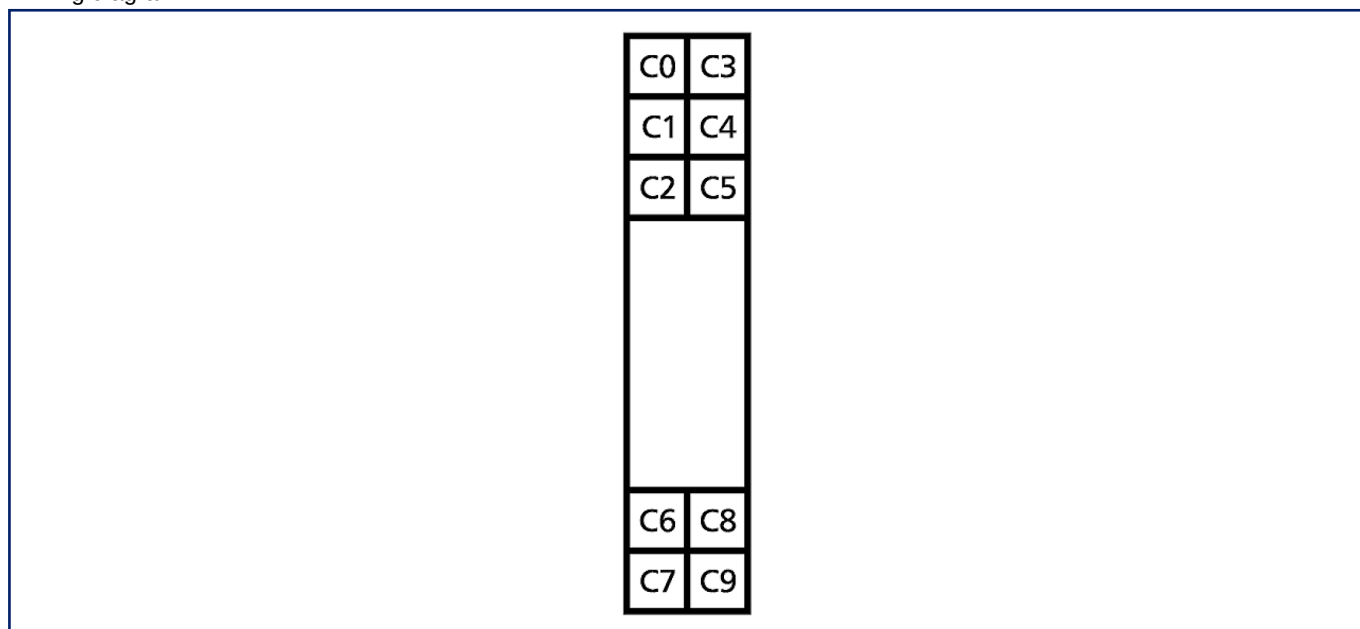

C | Logline

Data sheet
PV10 F10

Page 6/6

P/N
110720

EAN 4250184123187

2023/06/20

Version: B

Illustrations

Circuit diagram

