



Data sheet

OpDAT pre-assembled splice tray 12xLC PC OM3

Illustrations

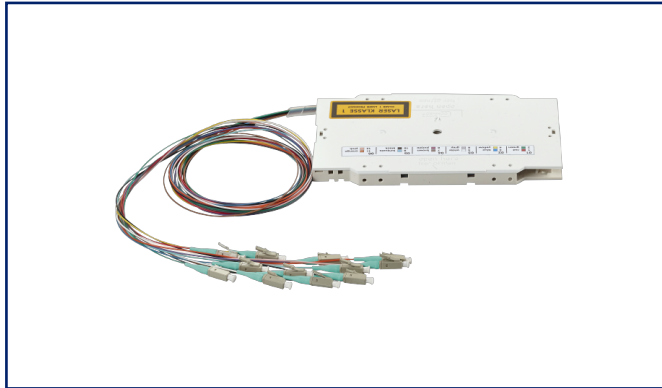

Dimensional drawing

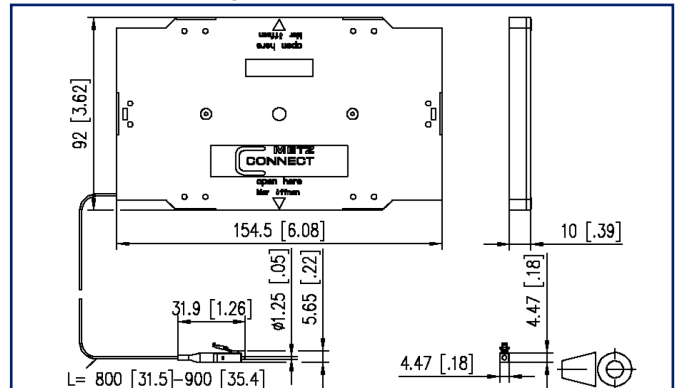

See enlarged drawings at the end of document

Product specification

- pre-assembled splice tray equipped with 12 pigtailed LC plugs
- suitable to be mounted in the following fiber optic patch panels: OpDAT fix, OpDAT slide, OpDAT PF and OpDAT PA
- standard splice tray (154.50 x 92 x 10 mm) equipped with crimp splice holder and cover
- 12 semi-tight buffered pigtailed inserted and stripped
- assorted pigtail colors according to IEC 60304, primary and secondary coating in the same color
- with test report, insertion loss and return loss tested at 100 %
- lengths of the pigtailed starting from tray are layered between 80 and 90 cm
- variants: available with fiber types OS2, OM5, OM4, OM3



OpDAT pre-assembled splice tray 12xLC PC OM3

P/N

150925JO00-E

EAN 4250184174431

2023/06/01

Version: AH

Technical Data

General Data

Fields of application	data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	pre-assembled splice tray
Color	aqua
Dimensions	
Dimension (L x W x H)	92 mm x 154.5 mm x 10 mm
Dimension (L x W x H)	3.622 in. x 6.083 in. x 0.394 in.
Mode type of the fiber	Multimode
Fiber class	OM3 (ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.2)
Cable Type	pigtail(s)
Number of cables/ buffered fibers	12
Number of fibres each cable/ wire	1
Shape	PC (Physical Contact)
Fiber construction	50/125 µm
Minimum length	0.8 m
Minimum length	2.62 ft
Maximum length	0.9 m
Maximum length	2.95 ft

Connections/interfaces

Connector technology interface 2	LC PC
----------------------------------	-------

Materials and material properties

Material - Coupler housing	Plastics
Material - Housing	ABS
Halogen free	yes

P | Cabling

Data sheet

Page 3/5

OpDAT pre-assembled splice tray 12xLC PC OM3

P/N

150925JO00-E

EAN 4250184174431

2023/06/01

Version: AH

Technical Data

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130
ETIM 7.0	EC000762
ETIM 8.0	EC000762
ETIM 9.0	EC000762

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	97 g
Packaging unit - Weight (pound)	0.21 lb
Packaging dimension	258 mm x 164 mm x 51 mm
Packaging dimension	10.157 in. x 6.457 in. x 2.008 in.



P | Cabling

Data sheet

Page 4/5

OpDAT pre-assembled splice tray 12xLC PC OM3

P/N

150925JO00-E

EAN 4250184174431

2023/06/01

Version: AH

Accessories from

P/N	Designation
1502000200-E	OpDAT PF 1HE Patchfeld festeinbau für 24xSC/LC-D, unbestückt
1502007300-E	OpDAT PF patch panel for 24xLC-Duplex/SC-Simplex/E2000-Simplex
1502200200-E	OpDAT PA patch panel unequipped for 24xLC-D/SC-S/E2000, gray
1502507300-E	OpDAT fix patch panel for 24xLC-Duplex/SC-Simplex/E2000



P | Cabling

Data sheet

Page 5/5

OpDAT pre-assembled splice tray 12xLC PC OM3

P/N

150925JO00-E

EAN 4250184174431

2023/06/01

Version: AH

Illustrations

Dimensional drawing

