

# P | Cabling

## Data sheet

### OpDAT Wall-mounted distributor S 6xSC-D OM4 VIK

Page 1/5

P/N

150320BB06-E

EAN 4251394666488


2023/06/29

Version: C


## Illustrations



Dimensional drawing

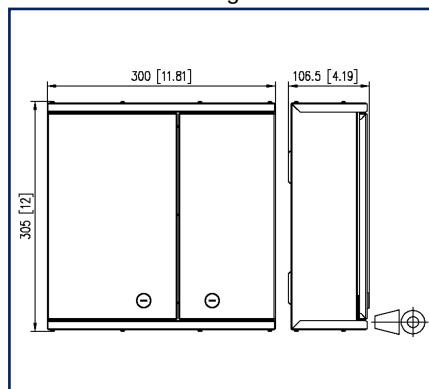

Drill pattern

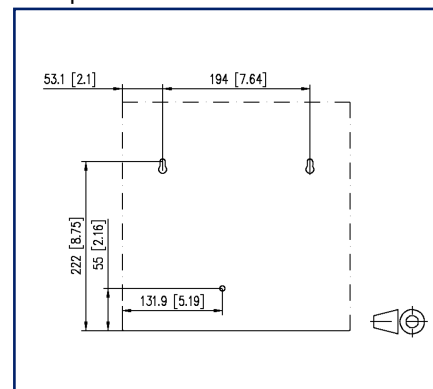

See enlarged drawings at the end of document

## Product specification

- distributor for universal use in floor cabling or as a building distribution point in the equipment room
- equipped with SC-D-adapters
- unused openings are closed by blind plugs
- wall-mount housing with two lockable swing doors, two different locks to separate network and building cabling
- easy, space saving wall mounting
- easy access possibilities and a secure routing of the VIKs
- four cable infeeds (scope of supply): 1x for VIKs with universal cables, 1x for M20/PG16, 2x for patch cords
- variants: size S: 305x300x107 mm or size M: 405x400x107 mm

# P | Cabling

## Data sheet

Page 2/5

## OpDAT Wall-mounted distributor S 6xSC-D OM4 VIK

P/N

150320BB06-E

EAN 4251394666488

2023/06/29

Version: C

### Technical Data

#### General Data

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| Fields of application                         | structured building cabling<br>office areas<br>data center |
| Mechanical measurement according to MICE      | M1                                                         |
| Ingress measurement according to MICE         | I1                                                         |
| Climatic measurement according to MICE        | C1                                                         |
| Electromagnetic measurement according to MICE | E3                                                         |
| Design                                        | Wall-mounted distributor                                   |
| Mounting style                                | AP                                                         |
| Transmission technology                       | Fiber optic                                                |
| Port numbering                                | yes                                                        |
| Color                                         | violet                                                     |
| Dimensions                                    |                                                            |
| Dimension (L x W x H)                         | 106.5 mm x 300 mm x 305 mm                                 |
| Dimension (L x W x H)                         | 4.193 in. x 11.811 in. x 12.008 in.                        |
| Fiber class                                   | OM4                                                        |
| Mode type of the fiber                        | Multimode                                                  |
| Labeling option                               | printed numbers                                            |

#### Connections/interfaces

|                                      |                    |
|--------------------------------------|--------------------|
| Connector technology interface 1     | SC-D Couplers      |
| Connector technology interface 2     | SC-D Couplers      |
| Number of equipped ports interface 1 | 6                  |
| Number of ports interface 2 equipped | 6                  |
| Cable access/outlet                  | from top or bottom |

#### Mechanical data

|                |                  |
|----------------|------------------|
| Cut-out        | SC-D, LC-Q, ST-D |
| Connector type | duplex           |

#### Materials and material properties

|                           |               |
|---------------------------|---------------|
| Material - Housing        | sheet steel   |
| Material - Housing finish | powder-coated |
| Material - Front cover    | sheet steel   |



# P | Cabling

Data sheet

Page 3/5

## OpDAT Wall-mounted distributor S 6xSC-D OM4 VIK

P/N

150320BB06-E

EAN 4251394666488

2023/06/29

Version: C

### Technical Data

#### Materials and material properties

|                               |                  |
|-------------------------------|------------------|
| Material - Front cover finish | powder-coated    |
| Material - Sleeve             | ceramic, slotted |
| Material - Coupler housing    | Plastics         |
| Halogen free                  | yes              |
| RoHS                          | compliant        |

#### Classifications

|          |          |
|----------|----------|
| ETIM 7.0 | EC001130 |
| ETIM 8.0 | EC001130 |
| ETIM 9.0 | EC001130 |

#### Packing details

|                   |               |
|-------------------|---------------|
| Type of packaging | 1 pc(s) / box |
|-------------------|---------------|

# P | Cabling

Data sheet

Page 4/5

## OpDAT Wall-mounted distributor S 6xSC-D OM4 VIK

P/N

150320BB06-E

EAN 4251394666488

2023/06/29

Version: C

### Accessories

| P/N         | Designation                                                                 |
|-------------|-----------------------------------------------------------------------------|
| 15032Z001-E | Cable infeed for 2xM20 for OpDAT Wall-mounted distributor S                 |
| 15032Z003-E | Cable infeed for 1xM25 for OpDAT Wall-mounted distributor S                 |
| 15032Z004-E | Cable infeed for two mounting plates VIK for OpDAT Wall-mounted distributor |
| 15032Z005-E | Cable infeed for patch cords for OpDAT Wall-mounted distributor S           |
| 15032Z006-E | Cable infeed for single cable for OpDAT Wall-mounted distributor S          |
| 15032Z089-E | OpDAT WV rotary bolt                                                        |

# P | Cabling

Data sheet

Page 5/5

## OpDAT Wall-mounted distributor S 6xSC-D OM4 VIK

P/N

150320BB06-E


EAN 4251394666488

2023/06/29

Version: C

### Illustrations

Dimensional drawing

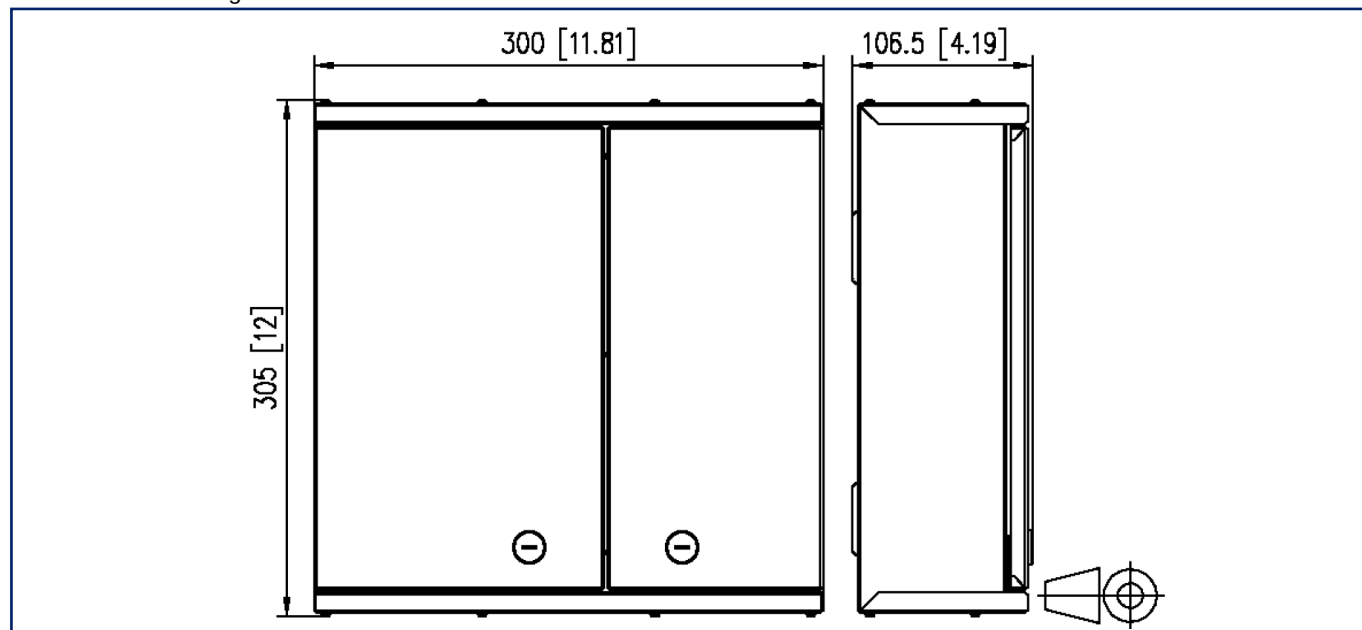

Drill pattern

