


Data sheet

OpDAT REGpro24 VIK 6xLC-Q APC OS2

Illustrations



Dimensional drawing

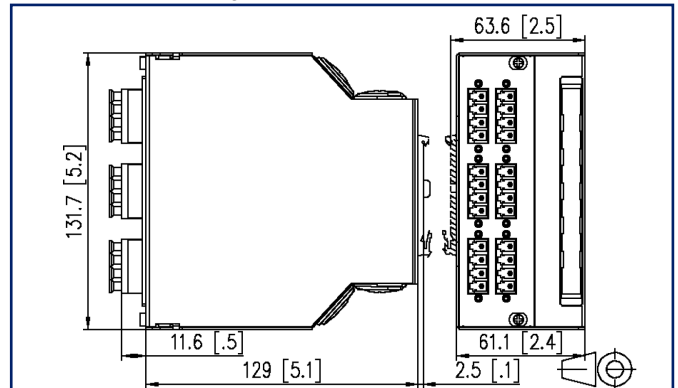

See enlarged drawings at the end of document

Product specification

- compact distributor housing for TH35 top hat rail systems
- prepared for installation of pre-assembled cables (VIK)
- suitable for VIKs with universal and breakout cables with a maximum of 12 fibers
- suitable for VIKs with mini-breakout cables with a maximum of 24 fibers
- equipped with LC-Q adapters
- front area with identification strips
- various mounting positions on the top hat rail system possible
- cable insertion from above or below, straight or inclined, suitable for M20 strain relief (up to 2 possible)
- housing made from sheet steel, powder coated (light gray, RAL 7035)



P | Cabling

Data sheet

Page 2/5

OpDAT REGpro24 VIK 6xLC-Q APC OS2

P/N

15024A07A06-E

EAN 4251394634777

2023/06/29

Technical Data

General Data

Fields of application	structured building cabling office areas harsh environment
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	Splice distributor - VIK
Mounting style	Standard rail TH35
Transmission technology	Fiber optic
Color	gray
Dimensions	
Dimension (L x W x H)	134 mm x 61 mm x 132 mm
Dimension (L x W x H)	5.276 in. x 2.402 in. x 5.197 in.
Height unit	3RU
Horizontal pitch	7HP
Weight	800 g
Weight	1.7637 lb
Fiber class	OS2
Mode type of the fiber	Singlemode
Shape	UPC (Ultra Physical Contact)
Labeling option	label strip / labeling strip

Connections/interfaces

Connector technology interface 1	LC-Q Couplers
Connector technology interface 2	LC-Q Couplers
Number of ports interface 1	6
Number of ports interface 2	6
Number of equipped ports interface 1	6
Number of ports interface 2 equipped	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6
Cable access/outlet	from top or bottom, straight or inclined



P | Cabling

Data sheet

Page 3/5

OpDAT REGpro24 VIK 6xLC-Q APC OS2

P/N

15024A07A06-E

EAN 4251394634777

2023/06/29

Technical Data

Mechanical data

Cut-out	SC-D, LC-Q
Connector type	quad
Life - Number of mating cycles	min. 1000
strain relief	M gland

Materials and material properties

Material - Housing	sheet steel
Material - Housing finish	powder-coated
Material - Front cover	sheet steel
Material - Front cover finish	powder-coated
Material - Mounting plate	steel
Material - Mounting plate finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
Material - Standard rail mounting support	Al (Aluminium)
Material - Dust protection	PC (polycarbonate)
Halogen free	yes
RoHS	compliant

Standards/Regulations

FO connector interfaces	IEC 61754-20
-------------------------	--------------

Classifications

ETIM 7.0	EC001130
ETIM 8.0	EC001130
ETIM 9.0	EC001130

Packing details

Type of packaging	1 pc(s) / plastic bag
-------------------	-----------------------

P | Cabling

Data sheet

Page 4/5

OpDAT REGpro24 VIK 6xLC-Q APC OS2

P/N

15024A07A06-E

EAN 4251394634777

2023/06/29

Accessories

P/N	Designation
150240M20Z-E	OpDAT REG strain relief M20

© 2023 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!



P | Cabling

Data sheet

OpDAT REGpro24 VIK 6xLC-Q APC OS2

Page 5/5

P/N

15024A07A06-E

EAN 4251394634777

2023/06/29

Illustrations

Dimensional drawing

