
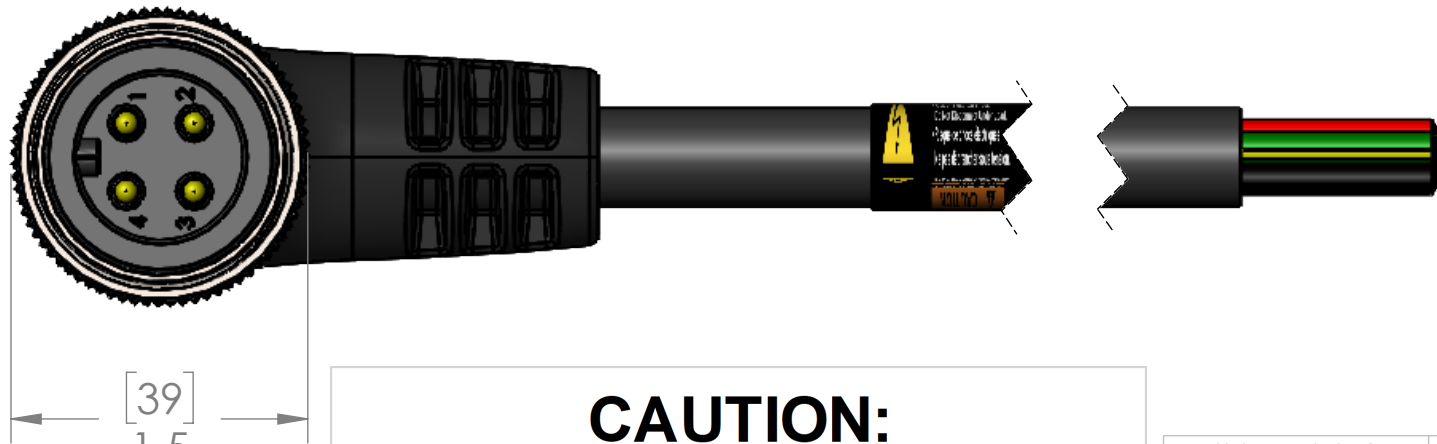


PIN #	COLOR
1	BLACK
2	GREEN / YELLOW
3	RED
4	WHITE

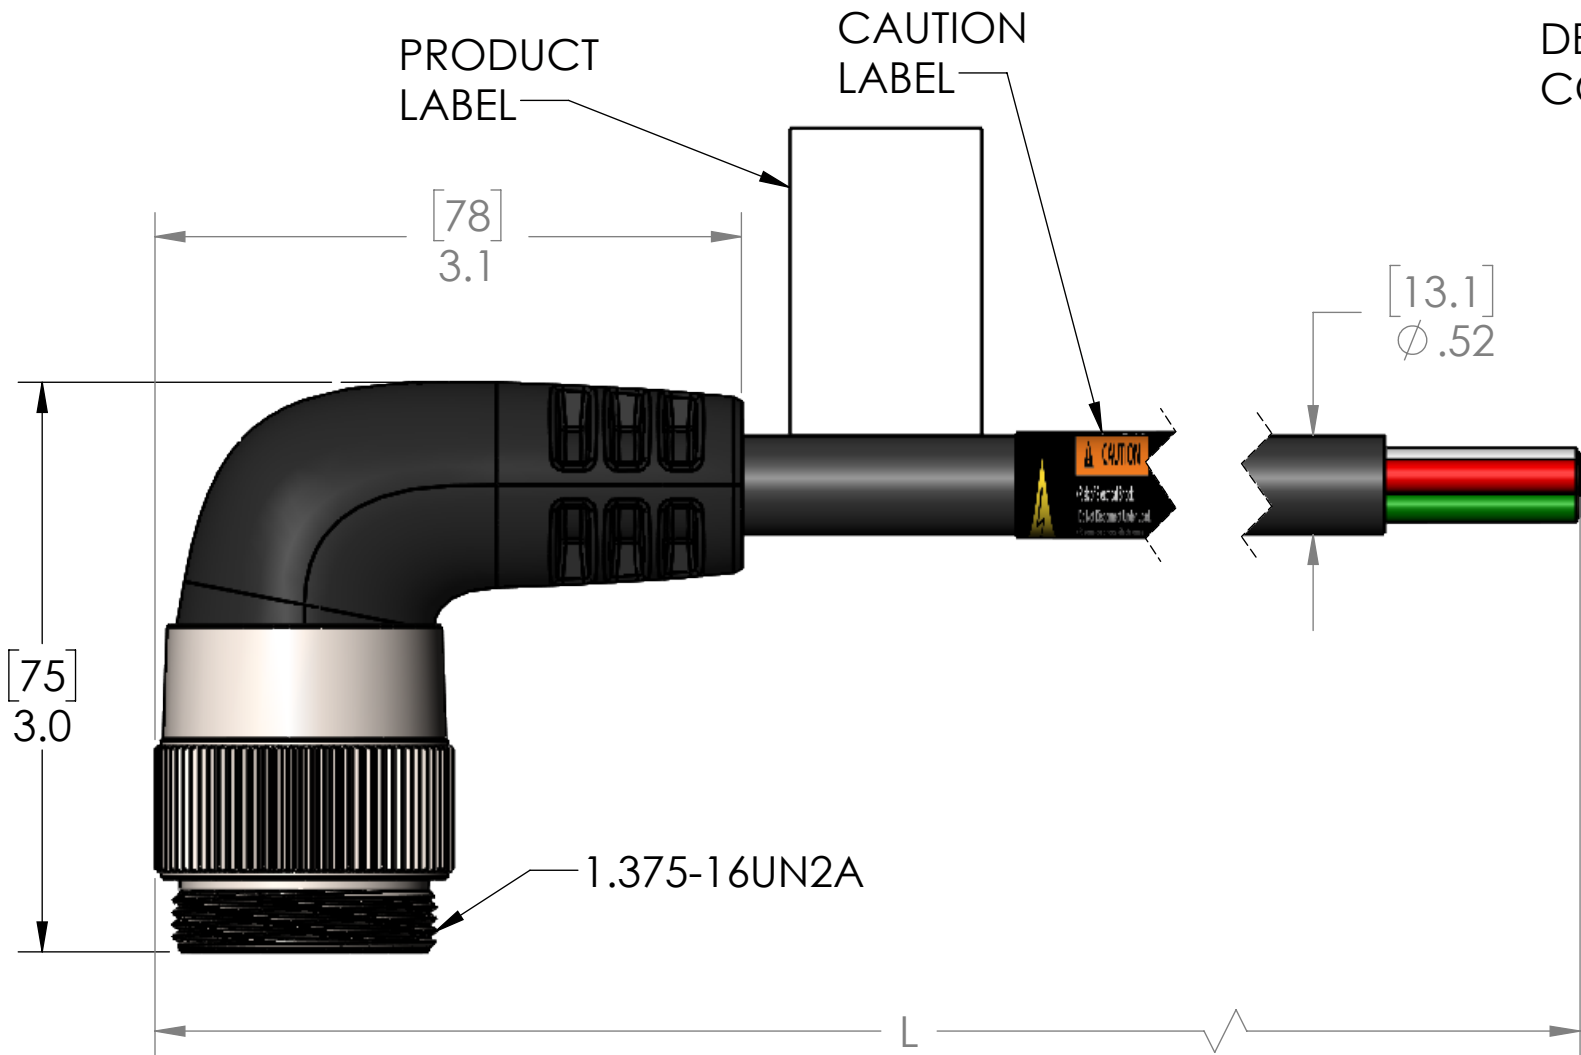

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	TC-ER
AWG:	10 AWG
JACKET:	BLACK TPE
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

**CAUTION:**

**RISK OF ELECTRICAL SHOCK**

**DO NOT DISCONNECT UNDER LOAD**

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	40A
TEMP:	-40° to 90°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	02/21/2024
	CHECKED BY	JJH
	CHECK DATE	02/21/2024
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

P/N	L	STD?
PMINW-40MP-1M-R-C011	40" [1m]	YES
PMINW-40MP-2M-R-C011	79" [2m]	YES
PMINW-40MP-3M-R-C011	117" [3m]	NO
PMINW-40MP-4M-R-C011	157" [4m]	NO
PMINW-40MP-5M-R-C011	197" [5m]	YES
PMINW-40MP-6M-R-C011	236" [6m]	NO
PMINW-40MP-8M-R-C011	315" [8m]	NO
PMINW-40MP-10M-R-C011	393" [10m]	YES
PMINW-40MP-15M-R-C011	590" [15M]	YES

PARTS LISTED AS NOT BEING STANDARD  
MAY REQUIRE MINIMUM ORDERS  
OTHER LENGTHS AVAILABLE,  
PLEASE CONSULT FACTORY

MENCOM CORPORATION		
TITLE:		
4 PL MAL PLG PMIN 10AWG		
SIZE	DWG. NO.	REV
B	PMINW-40MP-ZZ-R-C011	B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1