



16-2 Unshielded Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: R00301

Applications:

This document establishes the specifications for a riser rated two conductor unshielded cable used for fire protective signaling circuit applications.

Construction Details:

Number of Conductors: 2/C
Conductor: 16AWG Solid Bare Copper
Insulation Material: Polyvinyl Chloride
Nominal Insulation Thickness: 0.007 in.
Nominal Insulation Diameter: 0.065 in.
Color Code: Black, Red
Cable Lay: 5 in.
Jacket Material: Polyvinyl Chloride
Nominal Jacket thickness: 0.015 in.
Nominal Diameter: 0.160 in.
Surface Print: 3122598 CMR/FPLR 16AWG
C(ETL)US FT4 + Sequential Footage
Mark


Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating
Operation: -20°C to +60°C

Nominal Weight: 23 lbs. / 1,000 feet

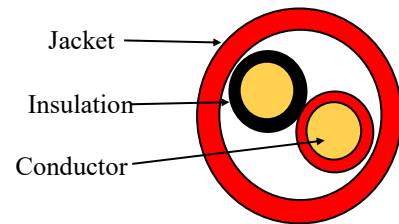

Standards:

- NEC Article 800, 760
- UL Subject 444, 1424, Type CMR/FPLR

Codes & Listings:

- C(ETL)US

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.





16-2 Unshielded Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: R00301

Note: While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeewire Products Corp. does not guarantee that it is error-free, nor does Remeewire Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.



MADE IN THE USA

