


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	1/7/2008	BEM

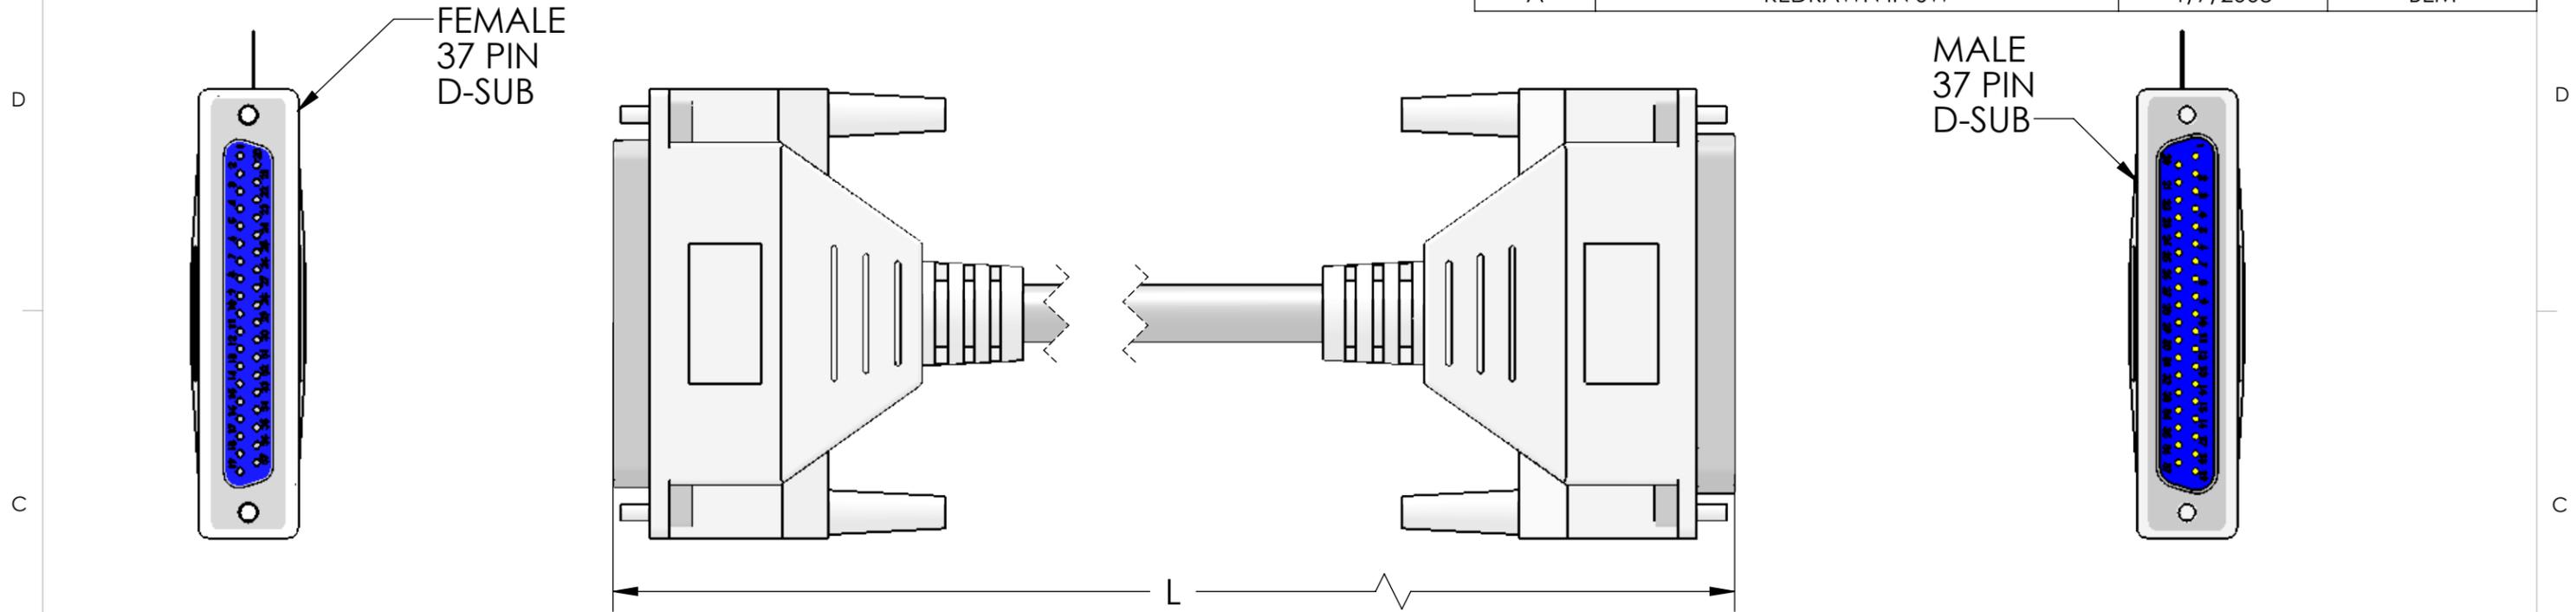

NOTES:
CABLE: 24/33 & 20/4 SHIELDED CABLE WITH 20AWG DRAIN
FULL LENGTH MYLAR FOIL SHIELD
FULLY WIRED STRAIGHT THRU

SHIELD & 20 AWG DRAIN CONNECTED TO METAL SHELL

BRASS NICKEL PLATED THUMB SCREWS

P/N	L	TOLER.
DB37-MFP-0.6M	600mm	+45/-45
DB37-MFP-1M	1,000mm	+75 / -50
DB37-MFP-2M	2,000mm	+100 / -50
DB37-MFP-3M	3,000mm	+100 / -50
DB37-MFP-5M	5,000mm	+150 / -50
DB37-MFP-6M	6,000mm	+150 / -50
DB37-MFP-8M	8,000mm	+200 / -100
DB37-MFP-10M	10,000mm	+200 / -100
DB37-MFP-12M	12,000mm	+250 / -100
DB37-MFP-15M	15,000mm	+250 / -100
DB37-MFP-20M	20,000mm	+325/-100

PIN #	COLOR	AWG	PIN #	COLOR	AWG	PIN #	COLOR	AWG
1	WHITE	24AWG	14	VIOLET/RED	24AWG	27	YELLOW/RED	24AWG
2	WHITE/BLACK	24AWG	15	VIOLET	24AWG	28	GRAY/RED	24AWG
3	GREEN	24AWG	16	VIOLET/BLACK	24AWG	29	PINK/RED	24AWG
4	GREEN/BLACK	24AWG	17	ORANGE	24AWG	30	RED/WHITE	24AWG
5	YELLOW	24AWG	18	ORANGE/BLACK	24AWG	31	LIGHT GREEN/RED	24AWG
6	YELLOW/BLACK	24AWG	19	LIGHT BLUE	24AWG	32	VIOLET/WHITE	24AWG
7	GRAY	24AWG	20	LIGHT BLUE/BLACK	24AWG	33	LIGHT BLUE/RED	24AWG
8	GRAY/BLACK	24AWG	21	LIGHT GREEN	24AWG	34	BROWN	20AWG
9	PINK	24AWG	22	LIGHT GREEN/BLACK	20AWG	35	BROWN/WHITE	20AWG
10	PINK/BLACK	24AWG	23	BLUE/BLACK	20AWG	36	BLUE	20AWG
11	RED	24AWG	24	BROWN/BLACK	20AWG	37	BLUE/WHITE	20AWG
12	RED/BLACK	24AWG	25	WHITE/ORANGE	20AWG			
13	BLACK	24AWG	26	GREEN/WHITE				

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES AND [MM]
 MATERIAL
 FINISH
 SPECIFICATIONS
 DO NOT SCALE DRAWING

NAME	MENCOM CORPORATION	
DRAWN	DWM	TITLE:
CHECKED		DB37 M-F EXT CABLE
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		
SIZE	DWG. NO.	REV
B	DB37-MFP-ZZ	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1