



—9 PIN D-SUB CONFIGURED
MALE EXTERIOR/ FEMALE INTERIOR

—HIGH DENSITY 15 PIN
CONFIGURED
FEMALE EXTERIOR/ FEMALE INTERIOR

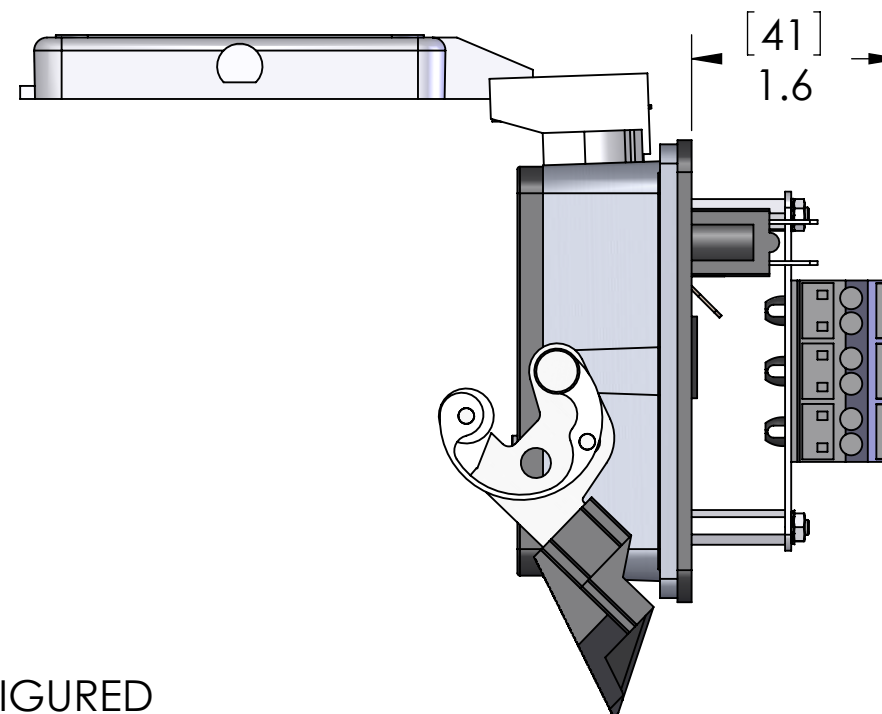

PANEL CUTOUT

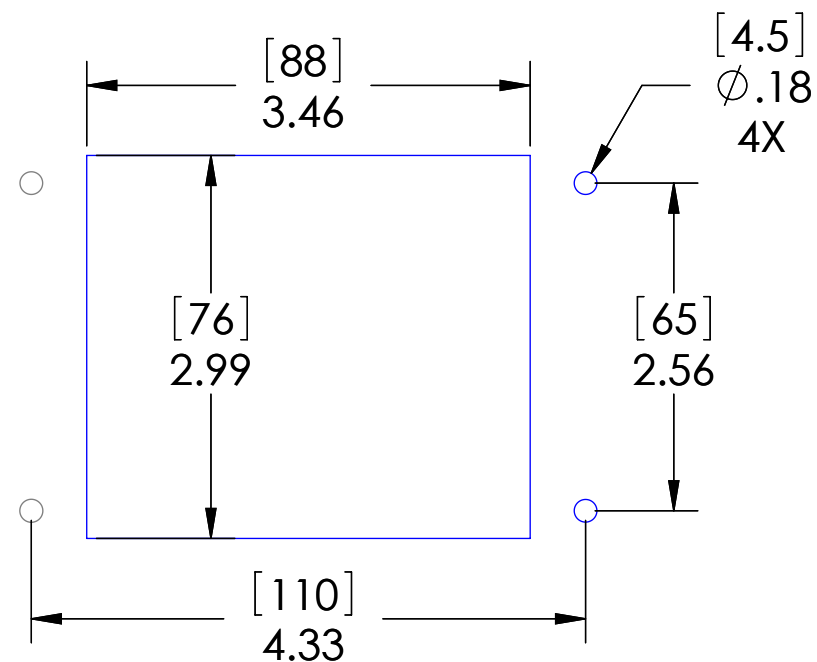

	HOUSING MATERIALS
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

D:	DRAWN BY	DCG	<h1 style="text-align: center;">MENCOM CORPORATION</h1> <p style="text-align: center;">TITLE:</p> <p style="text-align: center;">SMPLX; DB9; DB15; RJ45; 3R; 32</p>		
	DRAWN DATE	07/09/2021			
	CHECKED BY	DCG			
	CHECK DATE	07/13/2021			
	COMMENTS:		SIZE	DWG. NO.	REV
			B	DP1-MDB9-DDB15F-RJ45-R-32	D
			SCALE: 2:3	WEIGHT:	SHEET 1 OF 1

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.