| WIRING | |
|---|---|
| COLOR | FUNCTION |
| | |
| BROWN | V+ (ALL PORTS PIN 1) |
| BLUE | V- (ALL PORTS PIN 3) |
| GRN/YEL | GND (ALL PORTS PIN 5) |
| WHITE | PORT 1 PIN 4 |
| GREEN | PORT 2 PIN 4 |
| YELLOW | PORT 3 PIN 4 |
| GRAY | PORT 4 PIN 4 |
| PINK | PORT 5 PIN 4 |
| RED | PORT 6 PIN 4 |
| BLACK | PORT 7 PIN 4 |
| VIOLET | PORT 8 PIN 4 |

| REVISIONS | | | |
|---|---|---|---|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | REDRAWN IN SW | 2/20/2007 | |

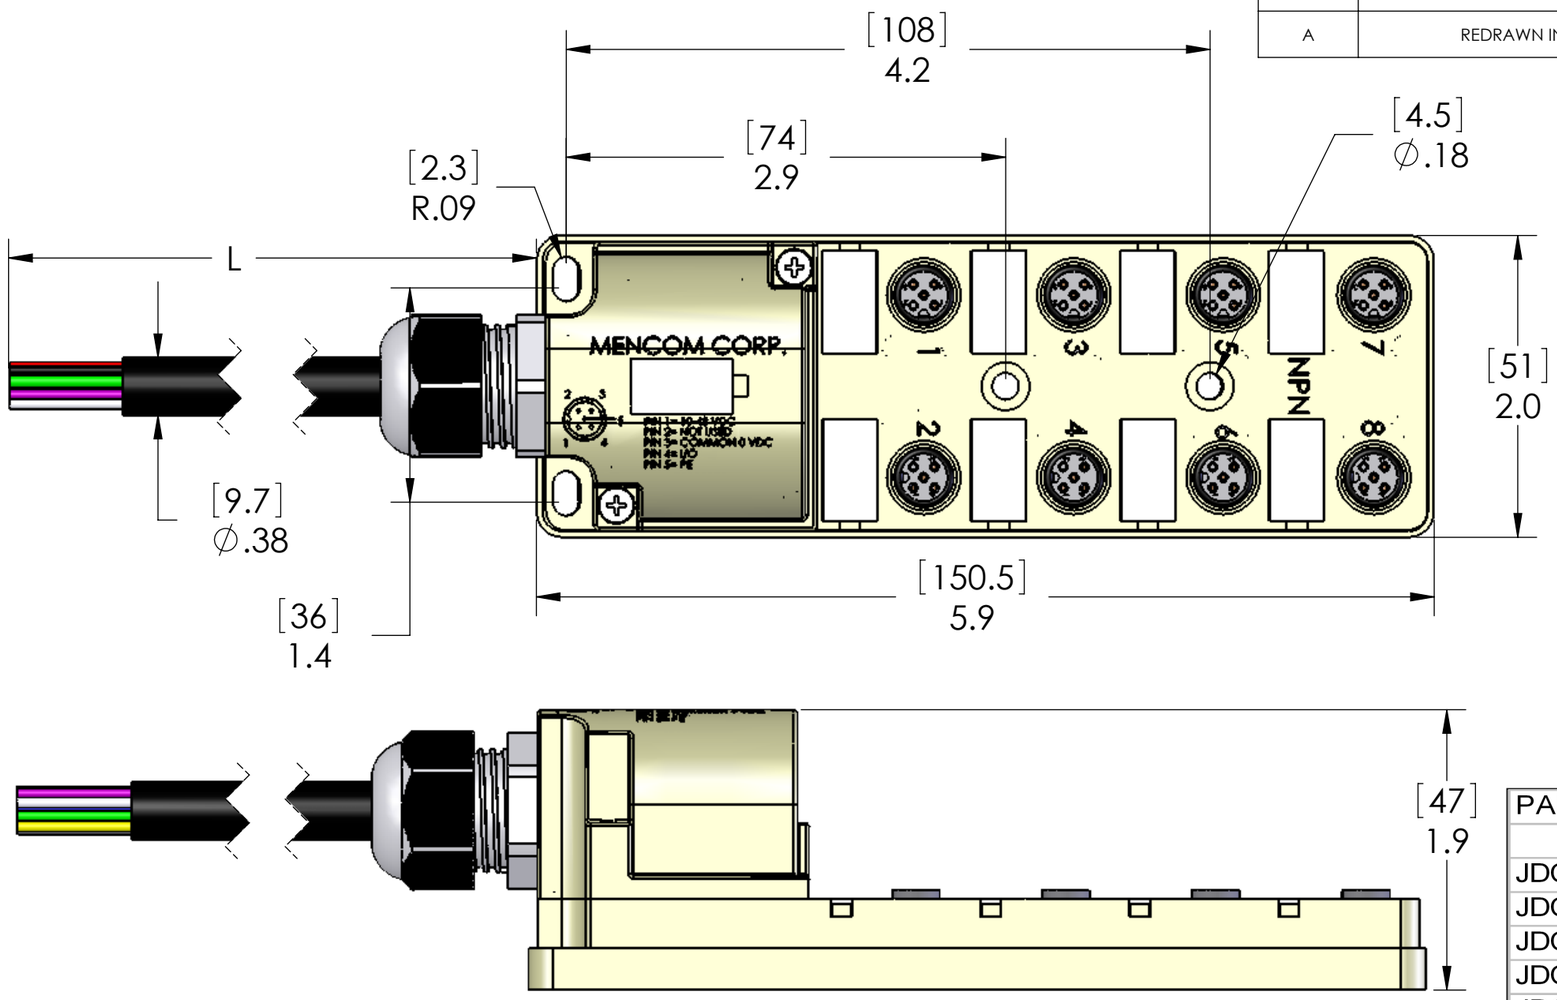


| PART NUMBER | L |
|---|---|
| | |
| JDC-84N-211-C010 | 40" {1M] |
| JDC-84N-211-C020 | 78" [2M] |
| JDC-84N-211-C030 | 118" [3M] |
| JDC-84N-211-C040 | 157" [4M] |
| JDC-84N-211-C050 | 197" [5M] |
| JDC-84N-211-C080 | 315" [8M] |
| JDC-84N-211-C100 | 393" [10M] |
| JDC-84N-211-C150 | 590" [15M] |
| JDC-84N-211-C200 | 786" [20M] |

| MATERIALS: | |
|---|---|
| | |
| BODY: | PBT |
| MARKERS: | POLYAMIDE |
| INSERTS: | POLYAMIDE |
| GLAND: | POLYAMIDE |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| O-RINGS: | NBR |
| CABLE: | 18/3, 22/8 BLK PUR JACKET |
| | |
| RATINGS: | |
| | |
| VOLTS: | 48VDC MAX |
| AMPS: | 3A PER PORT, 8A PER BLOCK |

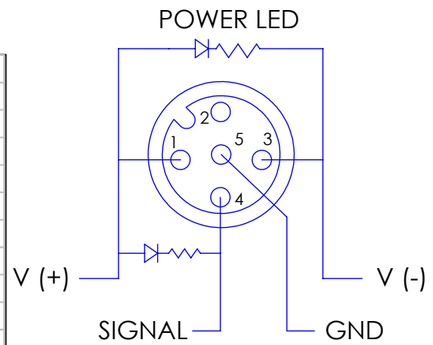


**THIS IS AN NPN BLOCK**

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| | | NAME |
|---|---|---|
| UNLESS OTHERWISE SPECIFIED: | DRAWN | DWM |
| DIMENSIONS ARE IN INCHES AND [MM] | CHECKED | |
| | ENG APPR. | |
| | MFG APPR. | |
| | Q.A. | |
| MATERIAL | COMMENTS: | |
| FINISH | | |
| DO NOT SCALE DRAWING | | |

MENCOM CORPORATION

TITLE:

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | JDC-84N-211-CZZ | A |
| SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1 |