


COLOR	PORT / PIN	FUNCTION
BLUE	ALL PORTS PIN 3	V-
BROWN	ALL PORTS PIN 1	V+
GRN/YEL	ALL PORTS PIN 5	GROUND
WHITE	PORT 1 PIN 4	I/O
GREEN	PORT 2 PIN 4	I/O
YELLOW	PORT 3 PIN 4	I/O
GRAY	PORT 4 PIN 4	I/O
PINK	PORT 5 PIN 4	I/O
RED	PORT 6 PIN 4	I/O
BLACK	PORT 7 PIN 4	I/O
VIOLET	PORT 8 PIN 4	I/O
GRAY/PINK	PORT 1 PIN 2	I/O
RED/BLUE	PORT 2 PIN 2	I/O
WHITE/GREEN	PORT 3 PIN 2	I/O
BROWN/GREEN	PORT 4 PIN 2	I/O
WHITE/YELLOW	PORT 5 PIN 2	I/O
YELLOW/BROWN	PORT 6 PIN 2	I/O
WHITE/GRAY	PORT 7 PIN 2	I/O
GRAY/BROWN	PORT 8 PIN 2	I/O

MATERIALS / SPECIFICATIONS	
BODY:	PBT
CABLE GLAND:	POLYAMIDE
O-RINGS:	NBR
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/3, 16/22 BLK PUR JACKET
RATINGS:	
VOLTAGE	150V max
AMPERAGE	3A PER PORT, 8A PER BLOCK



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

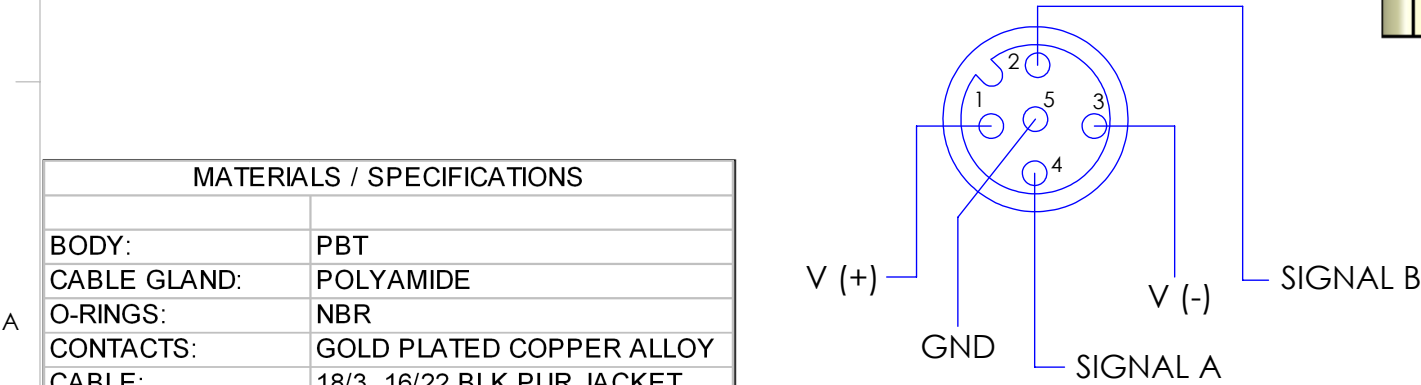